


13	12	11	10	9	8	7	6	5	4	3	2	1
PART NUMBER	ENGINEERING NO.	LENGTH										
1300110119	228020A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]										
1300110124	228020A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]										
1300110130	228020A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]										

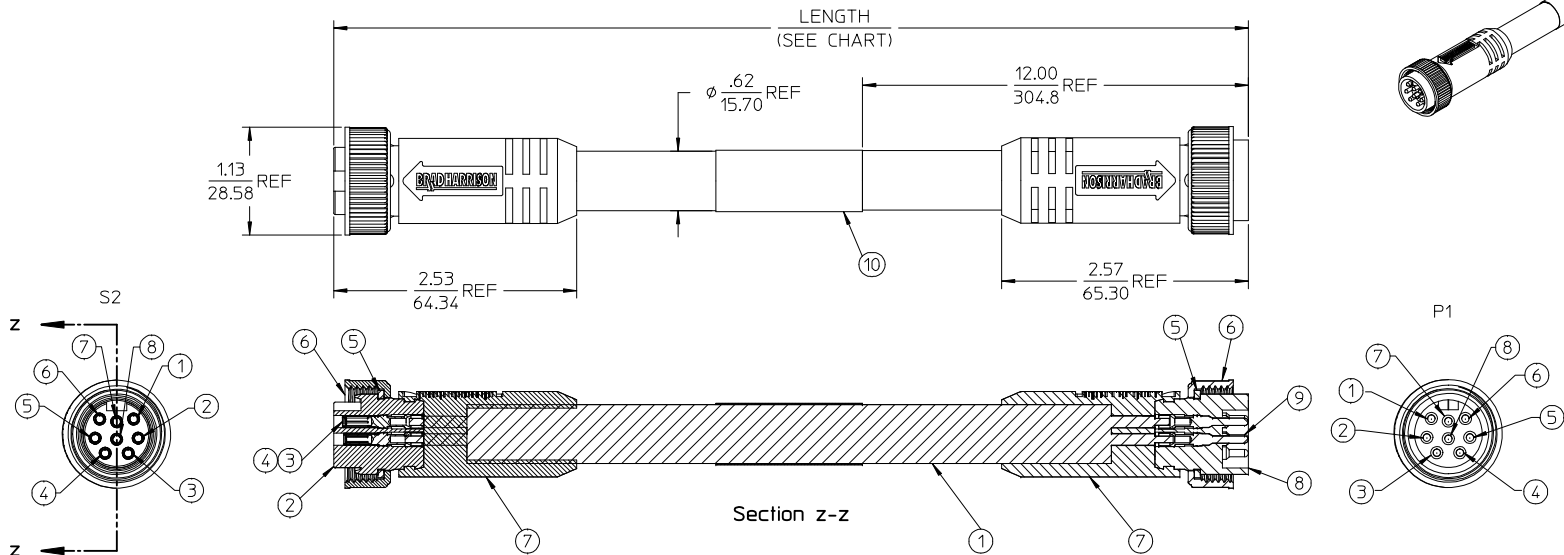

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, C-SIZE 8 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 7 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

S2		P1
1	ORANGE	1
2	BLUE	2
3	WHITE/BLACK	3
4	BLACK	4
5	WHITE	5
6	RED	6
7	GREEN/YELLOW-GND	7
8	RED/BLACK	8

WIRING DIAGRAM

10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	8	PIN CONTACT	BRASS	GOLD PLATED
8	1	INSERT, MALE, 8 POLE	PVC	YELLOW
7	2	OVERMOLD	PVC	YELLOW
6	2	COUPLING NUT	ZINC DIE CAST	BLACK
5	2	FRICITION RING	NYLON	NATURAL
4	8	SOCKET CONTACT	BRASS	GOLD PLATED
3	8	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 8 POLE	PVC	YELLOW
1	1	CABLE, 16-8 ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: WNA2009-0813 DRWN:BRUPERT 2009/06/09 CHKD: APPR:J.MURPHY 2009/06/10 REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>2 PLACES</td> <td>± .01</td> <td>± .001</td> </tr> <tr> <td>1 PLACE</td> <td>± .03</td> <td>± .001</td> </tr> </table>			mm	INCH	4 PLACES	± .005	± .0005	3 PLACES	± .005	± .0005	2 PLACES	± .01	± .001	1 PLACE	± .03	± .001	DIMENSION STYLE IN/MM DRAWN BY DATE BRUPERT 2009/04/06 CHECKED BY DATE B. WOODMAN 2009/04/06 APPROVED BY DATE J. MURPHY 2009/04/06		SCALE 1:1 DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm	INCH																			
	4 PLACES	± .005	± .0005																			
	3 PLACES	± .005	± .0005																			
	2 PLACES	± .01	± .001																			
1 PLACE	± .03	± .001																				
	ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		TITLE MINI-CHANGE CORD ASSY MALE/FEMALE, B-SIZE 8 POLE MOLEX INCORPORATED DOCUMENT NO. SD-130011-003 SHEET NO. 1 OF 1																		

