

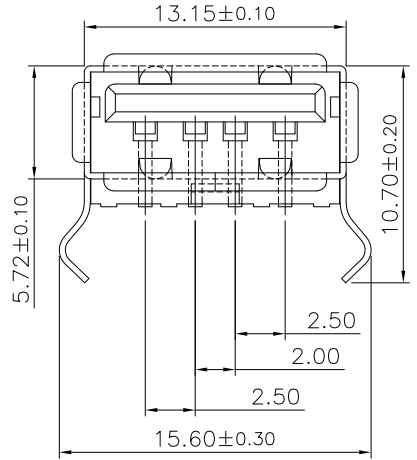


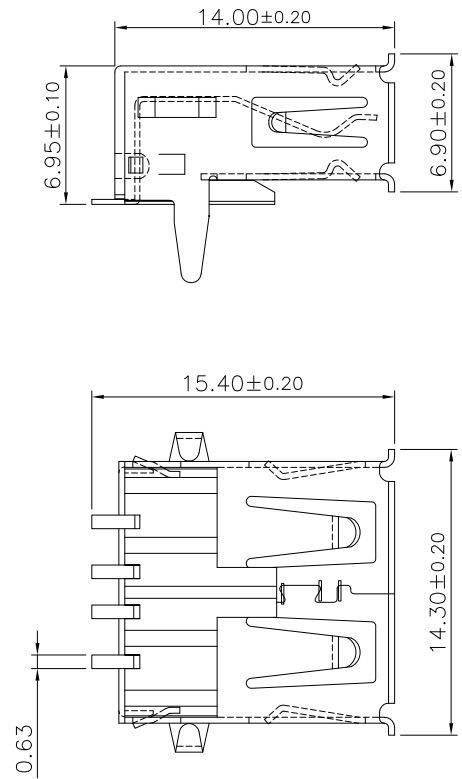



Specifications:
Current Rating:1.5A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:30m ohm. Max.
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:-40°C ~ +105°C

Material and Finish
Insulator:LCP (UL94V-0)
Insulator Color:Black
Contact:Brass
Plating:30u" Gold Plated on Contact Area
Tin Plated on Solder Tail.
Shell:Brass,Nickel Plated

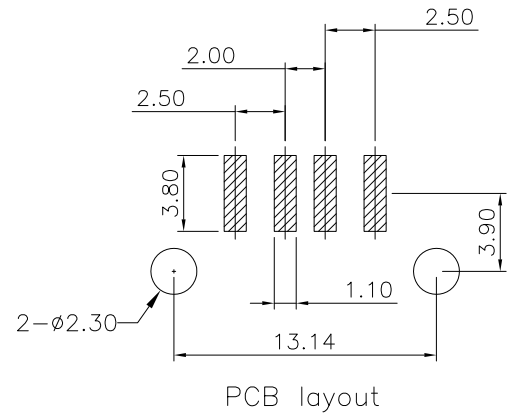

RoHS Compliant


				DRAWN:	GENERAL TOLERANCE:		CnC Tech Industrial Cable and Connector Technology		D
					CHECKED:	.X=±0.20 X°. = ±5° .XX=±0.10 .X° = ±3°			
				APPROVAL:		UNIT: MM		DESCRIPTION: USB A TYPE SMD W/KINK TYPE, 30 u"	
					SCALE:1:1				
				SHEET: 1 / 2		PART NO: 1002-002-01100-TR			
REV	DATE	FILE	BY	PROJECTION: 					

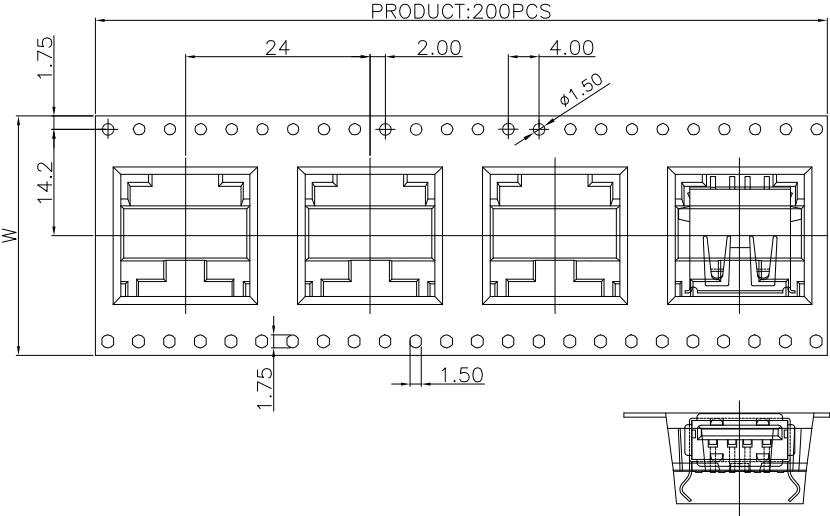


Note:

1.Dimension:
Carton Size:350X350X296 (mm)

2.Qunntity:
200 Pcs/R
7 R/Carton
Q'TY: 1400pcs

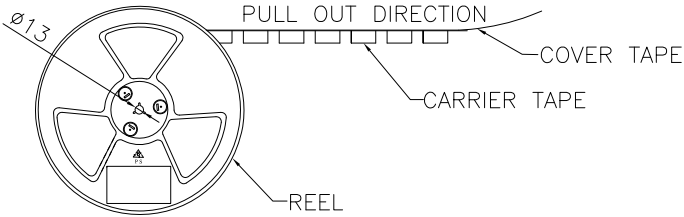

Pin. NO	W	Pcs/R	R/Carton	Q'TY
04	32	200	7	1400

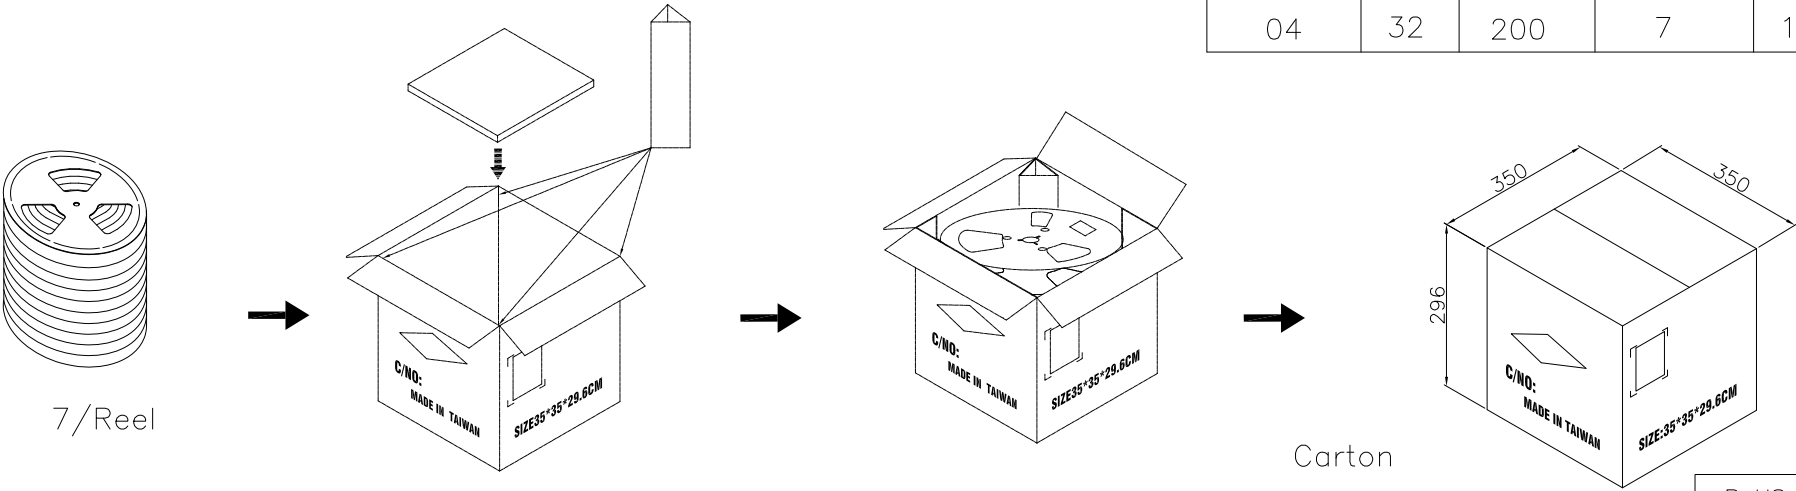

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 X°. =±5° .XX=±0.10 X°. =±3°	CnC Tech Industrial Cable and Connector Technology		D
				APPROVAL:	SCALE:1:1	PART NO: 1002-002-01100-TR		
REV	DATE	FILE	BY		SHEET: 2 / 2		PROJECTION: 