


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/14	
A		REVISED SPEC.	6/4/14	HR/VY
B		REVISED LAYOUT DIM.	11/25/14	AY/MY
C		UPDATE DRAWING	3/29/18	AY/KC

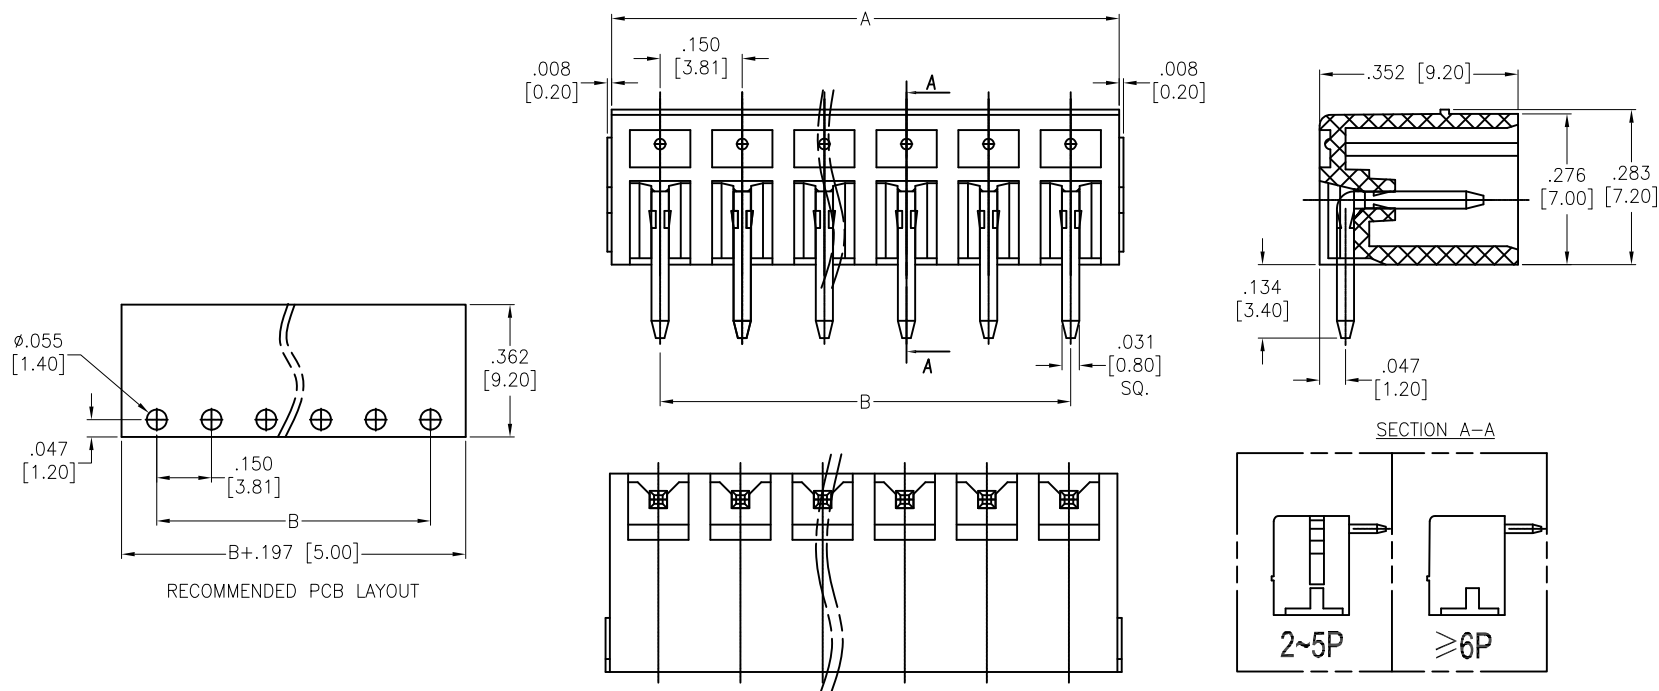

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Brass, Tin plated

Electrical:

Voltage rating: 300 V

Current rating: 8A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= $.150$ [3.81] x No. of Spaces + $.181$ [4.60]

B= $.150$ [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	$\pm .10$	$\phi .X$	$\pm .10$
.XX	$\pm .020$	$\phi .XX$	$\pm .015$
.XXX	$\pm .015$	$\phi .XXX$	$\pm .010$

APPROVALS		DATE
DRAWN	HR	5/5/14
CHECKED	SY	5/5/14
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
TERMINAL BLOCK, RIGHT ANGLE, .150" [3.81] PITCH			
SIZE	PART NO.	REV.	
X	EBSA-XX-B	C	
REF:	S00067C	SCALE:	NTS
SHEET 1 OF 1			