



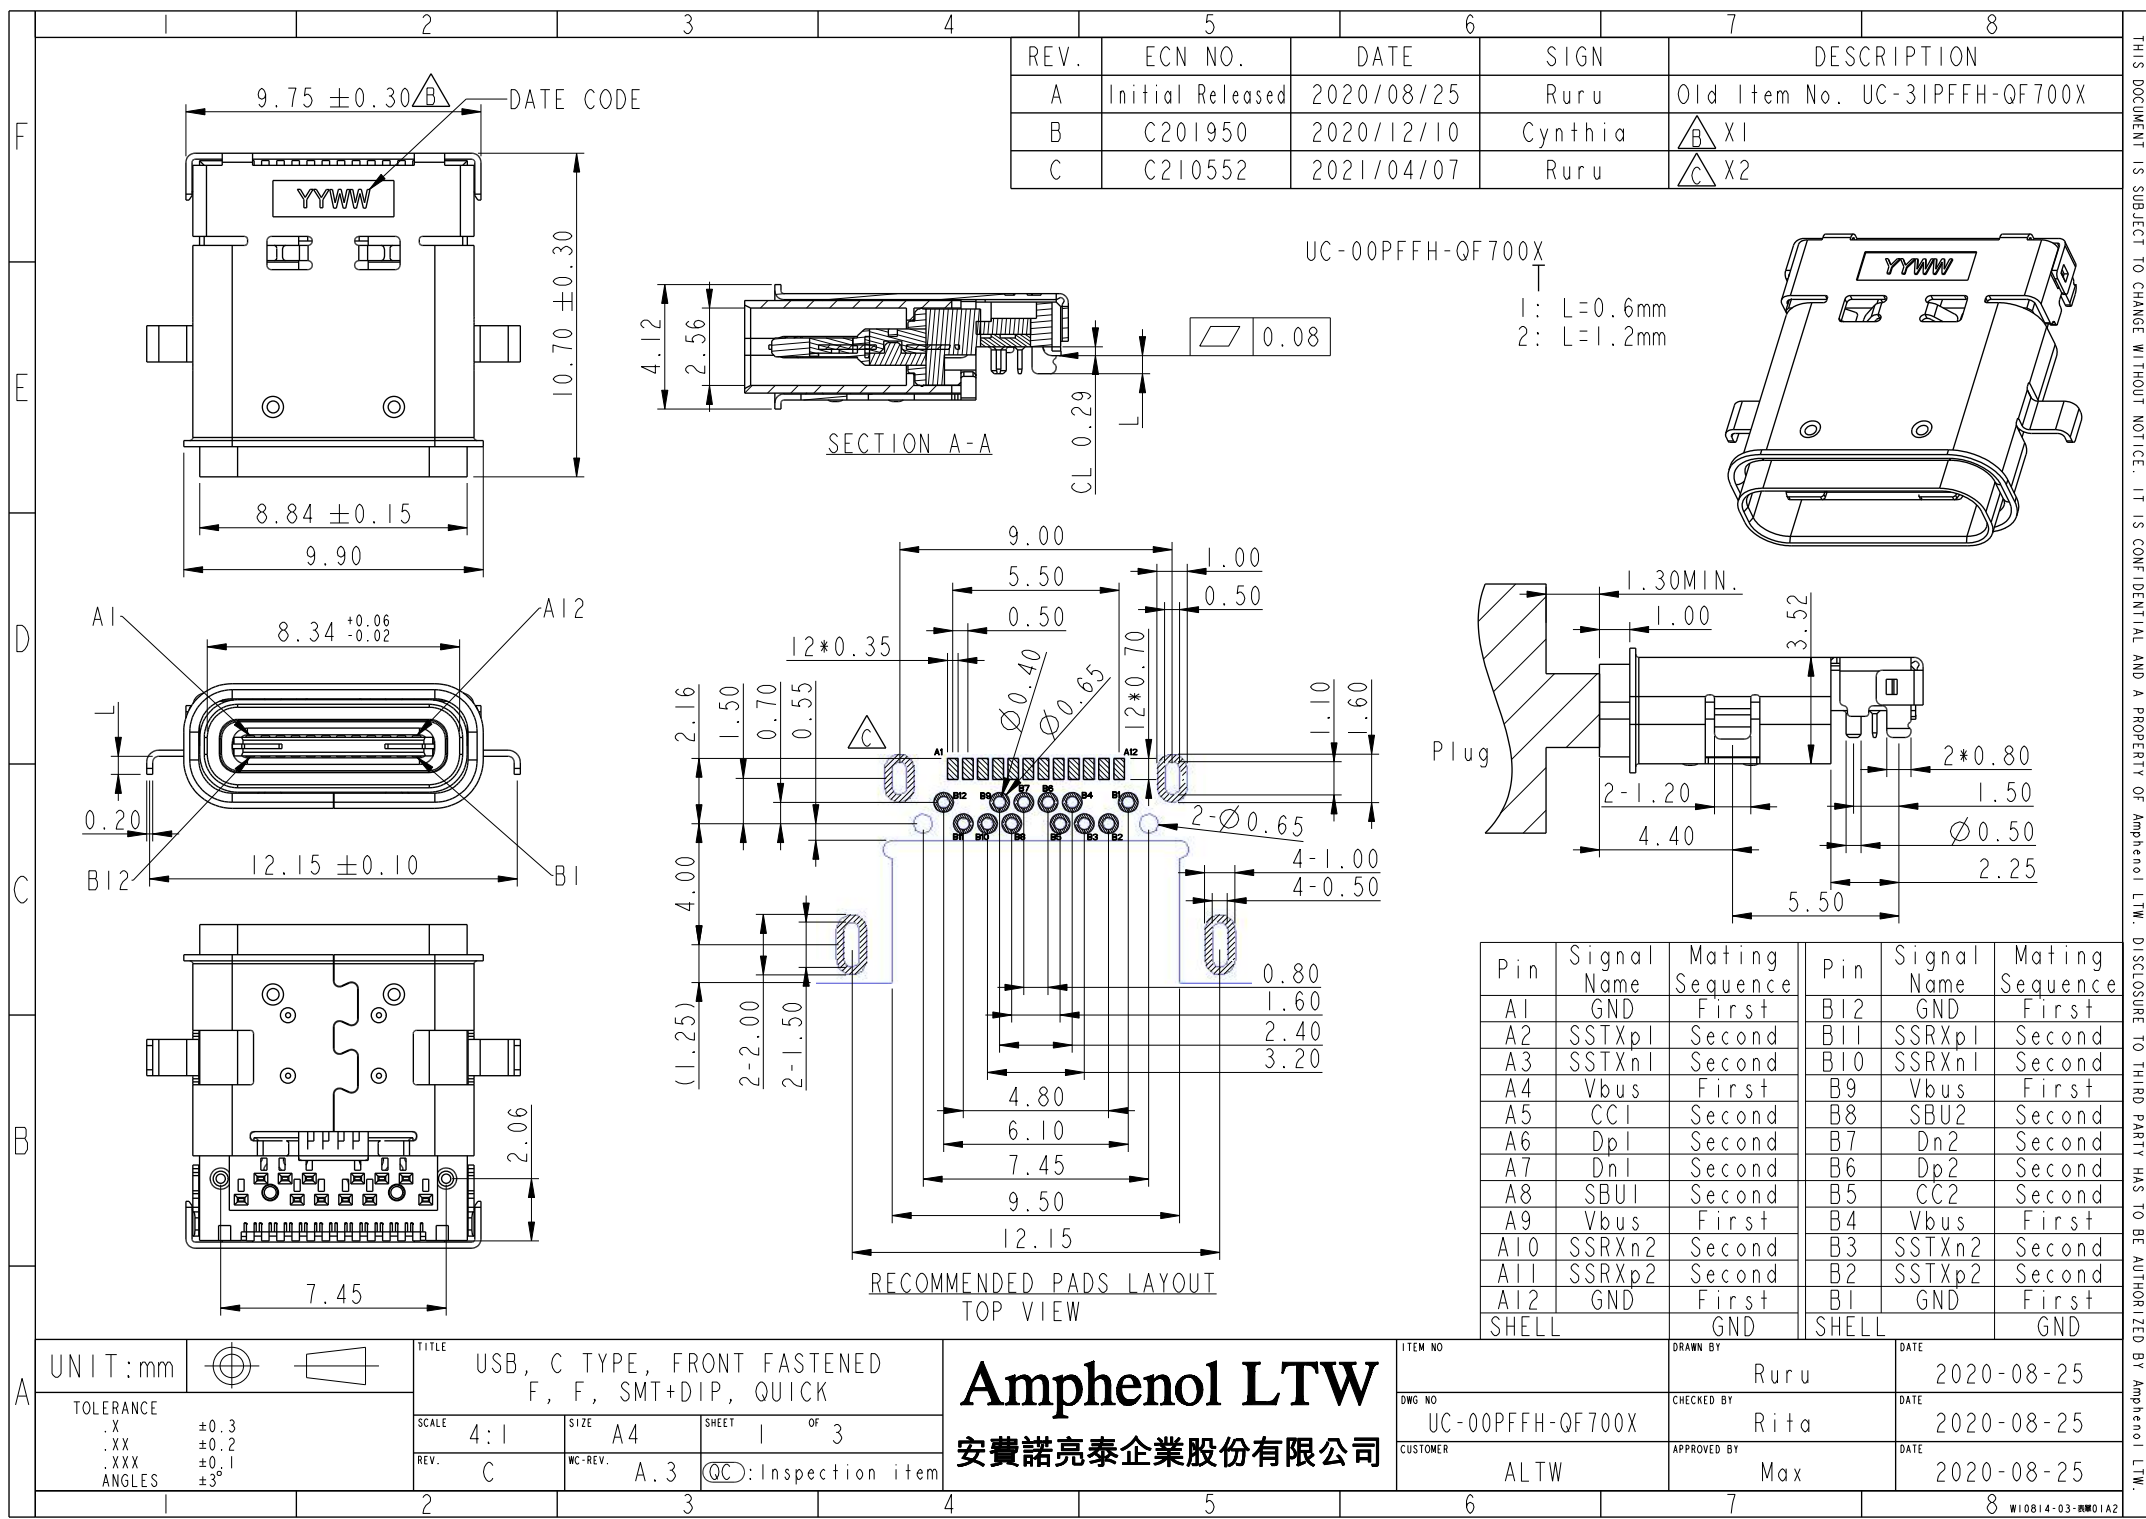


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Recommended open dimensions of case.

Tolerance: $\pm 0.03\text{mm}$

Matting area with sealing

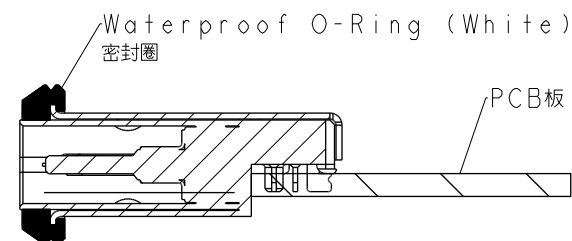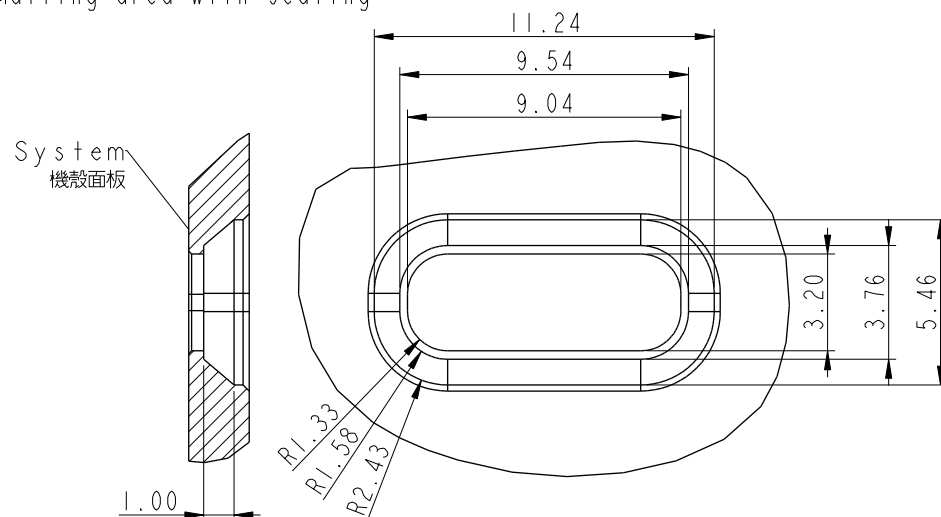Assembly Way
組裝方式，左右方向裝配

Note:

* IP: IP67

* Connector: Thermoplastic



* Pin: Copper Alloy, 30u" Gold

* Shield: Stainless (Inner)


Stainless & Nickel Plating (Out)

* Operating Temperature: -40°C To $+85^{\circ}\text{C}$

* All specifications are in compliance with the USB Association's specifications.

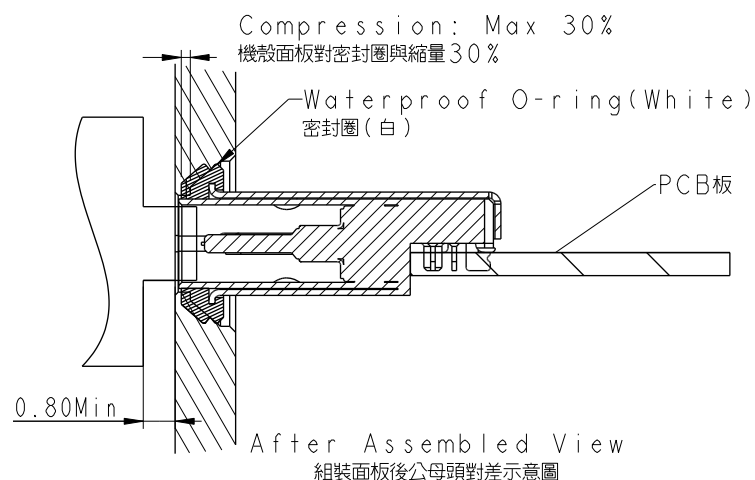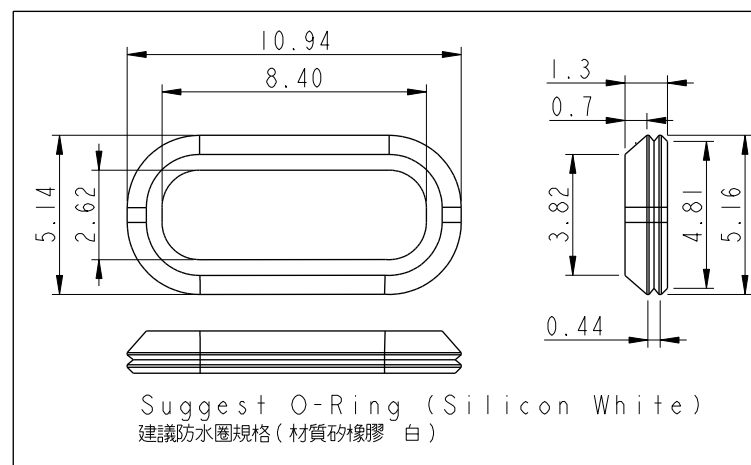

UNIT:mm



TOLERANCE

.X ± 0.3
.XX ± 0.2
.XXX ± 0.1
ANGLES $\pm 3^{\circ}$

TITLE

USB, C TYPE, FRONT FASTENED
F, F, SMT+DIP, QUICK

SCALE

4:1

SIZE

A4

SHEET

2

OF

3

REV.

C

WC-REV.

A.3

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

UC-00PFFH-QF700X

CUSTOMER

ALTW

DRAWN BY

Ruru

CHECKED BY

Rita

APPROVED BY

Max

DATE

2020-08-25



DATE

2020-08-25

DATE


2020-08-25

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

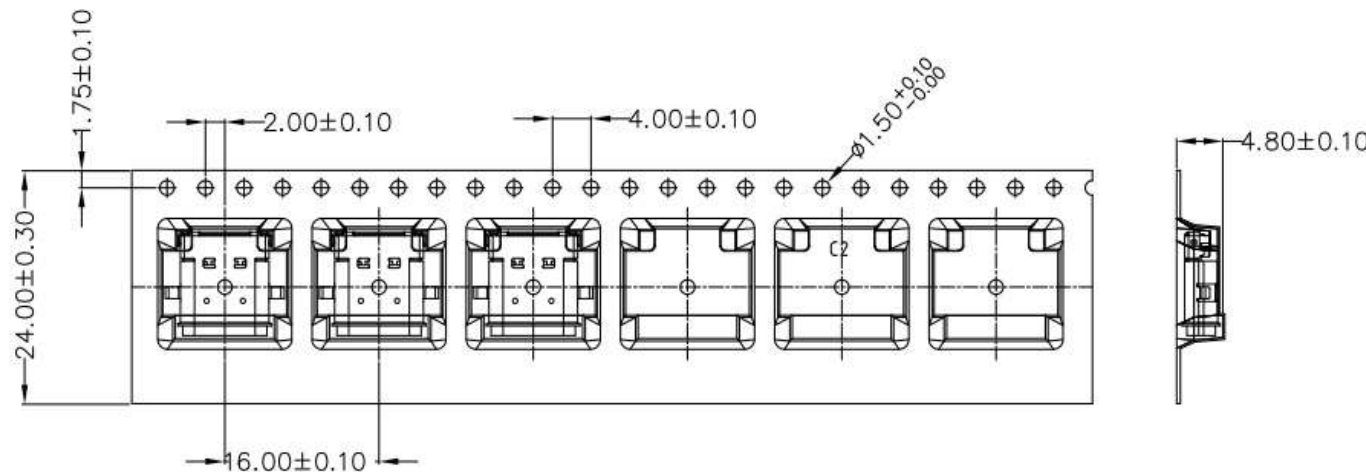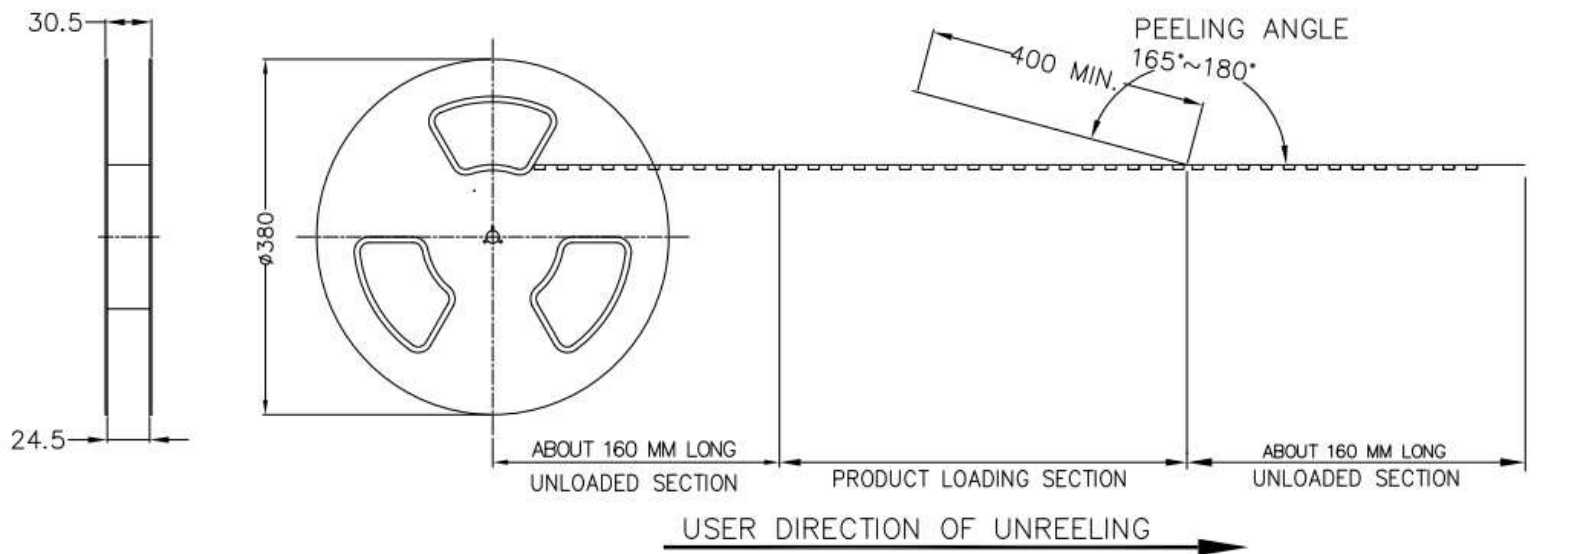

* 1K PCS (Connector) In A Tape&Reel
5 PCS Tape&Reel In A Carton
(5K PCS/Carton)

UNIT:mm



TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1
ANGLES ±3°

TITLE
USB, C TYPE, FRONT FASTENED
F, F, SMT+DIP, QUICK

SCALE 4:1 SIZE A4 SHEET 3 OF 3

REV. C WC-REV. A.3 QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2020-08-25
DWG NO UC-00PFFH-QF700X	CHECKED BY Rita	DATE 2020-08-25
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-08-25