

Type BLS-310

Fuse Block

10 Pole-Low Profile Mini Auto Blade



www.optifuse.com

(619) 593-5050

Specifications:

Max Current Rating: 30A per Circuit - 100A Max Input

Fuse Type: Low Profile Miniature Auto Blade – APS, ANS series


Base: PBT (UL-Flame 94V-0), Black

Cover: PC (UL-Flame 94V-2), Transparent

Terminals: Tin Plated Brass - 0.250" Quick Connect Terminals

Temperature Rating: -20° C ~ +85° C

Mechanical Dimensions: Inches [mm]

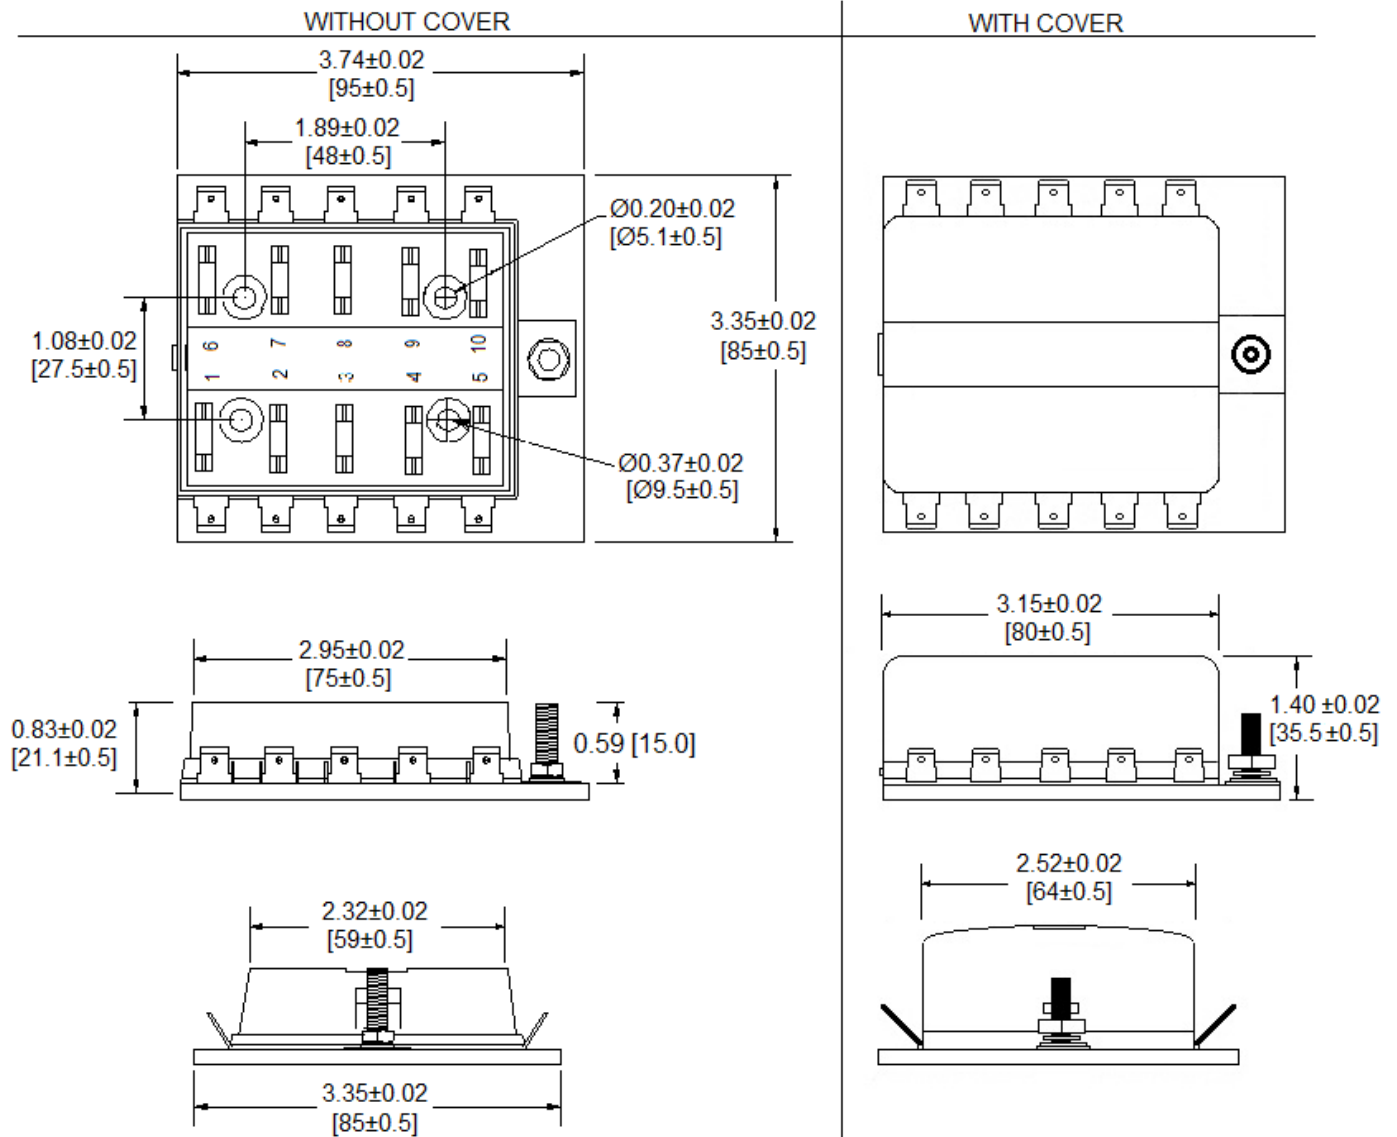

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev B 05/2017 - Page: 1/1
Code S02-01H