




SMD COUPLED INDUCTOR

TCI3-330M

- Can be used as two Single or Coupled windings or a 1:1 Isolation Transformer
- High Frequency Low Loss Toroidal Core
- Turns Ratio 1:1 $\pm 3\%$
- Test Frequency 1KHz, 1.0V
- Hi-Pot 300 VDC Winding to Winding

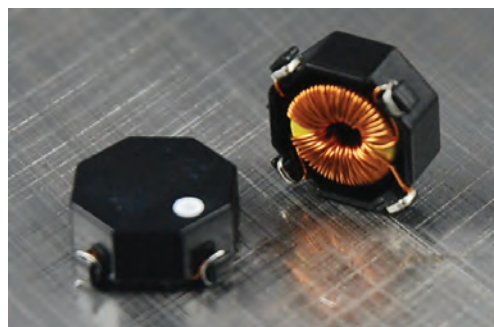

PARALLEL					SERIES			
Allied Part Number	Open Circuit Inductance $\mu\text{H} \pm 20\%$	Full Load Inductance $\mu\text{H} \text{ Min}$	Full Load Current Adc	DCR Max (m Ω)	Open Circuit Inductance $\mu\text{H} \pm 20\%$	Full Load Inductance $\mu\text{H} \text{ Min}$	Full Load Current Adc	DCR Max (m Ω)
TCI3-330M	32.86	19.6	.96	83	131.42	78.77	.96	331

All specifications subject to change without notice.

MECHANICAL

UNIT: mm

