

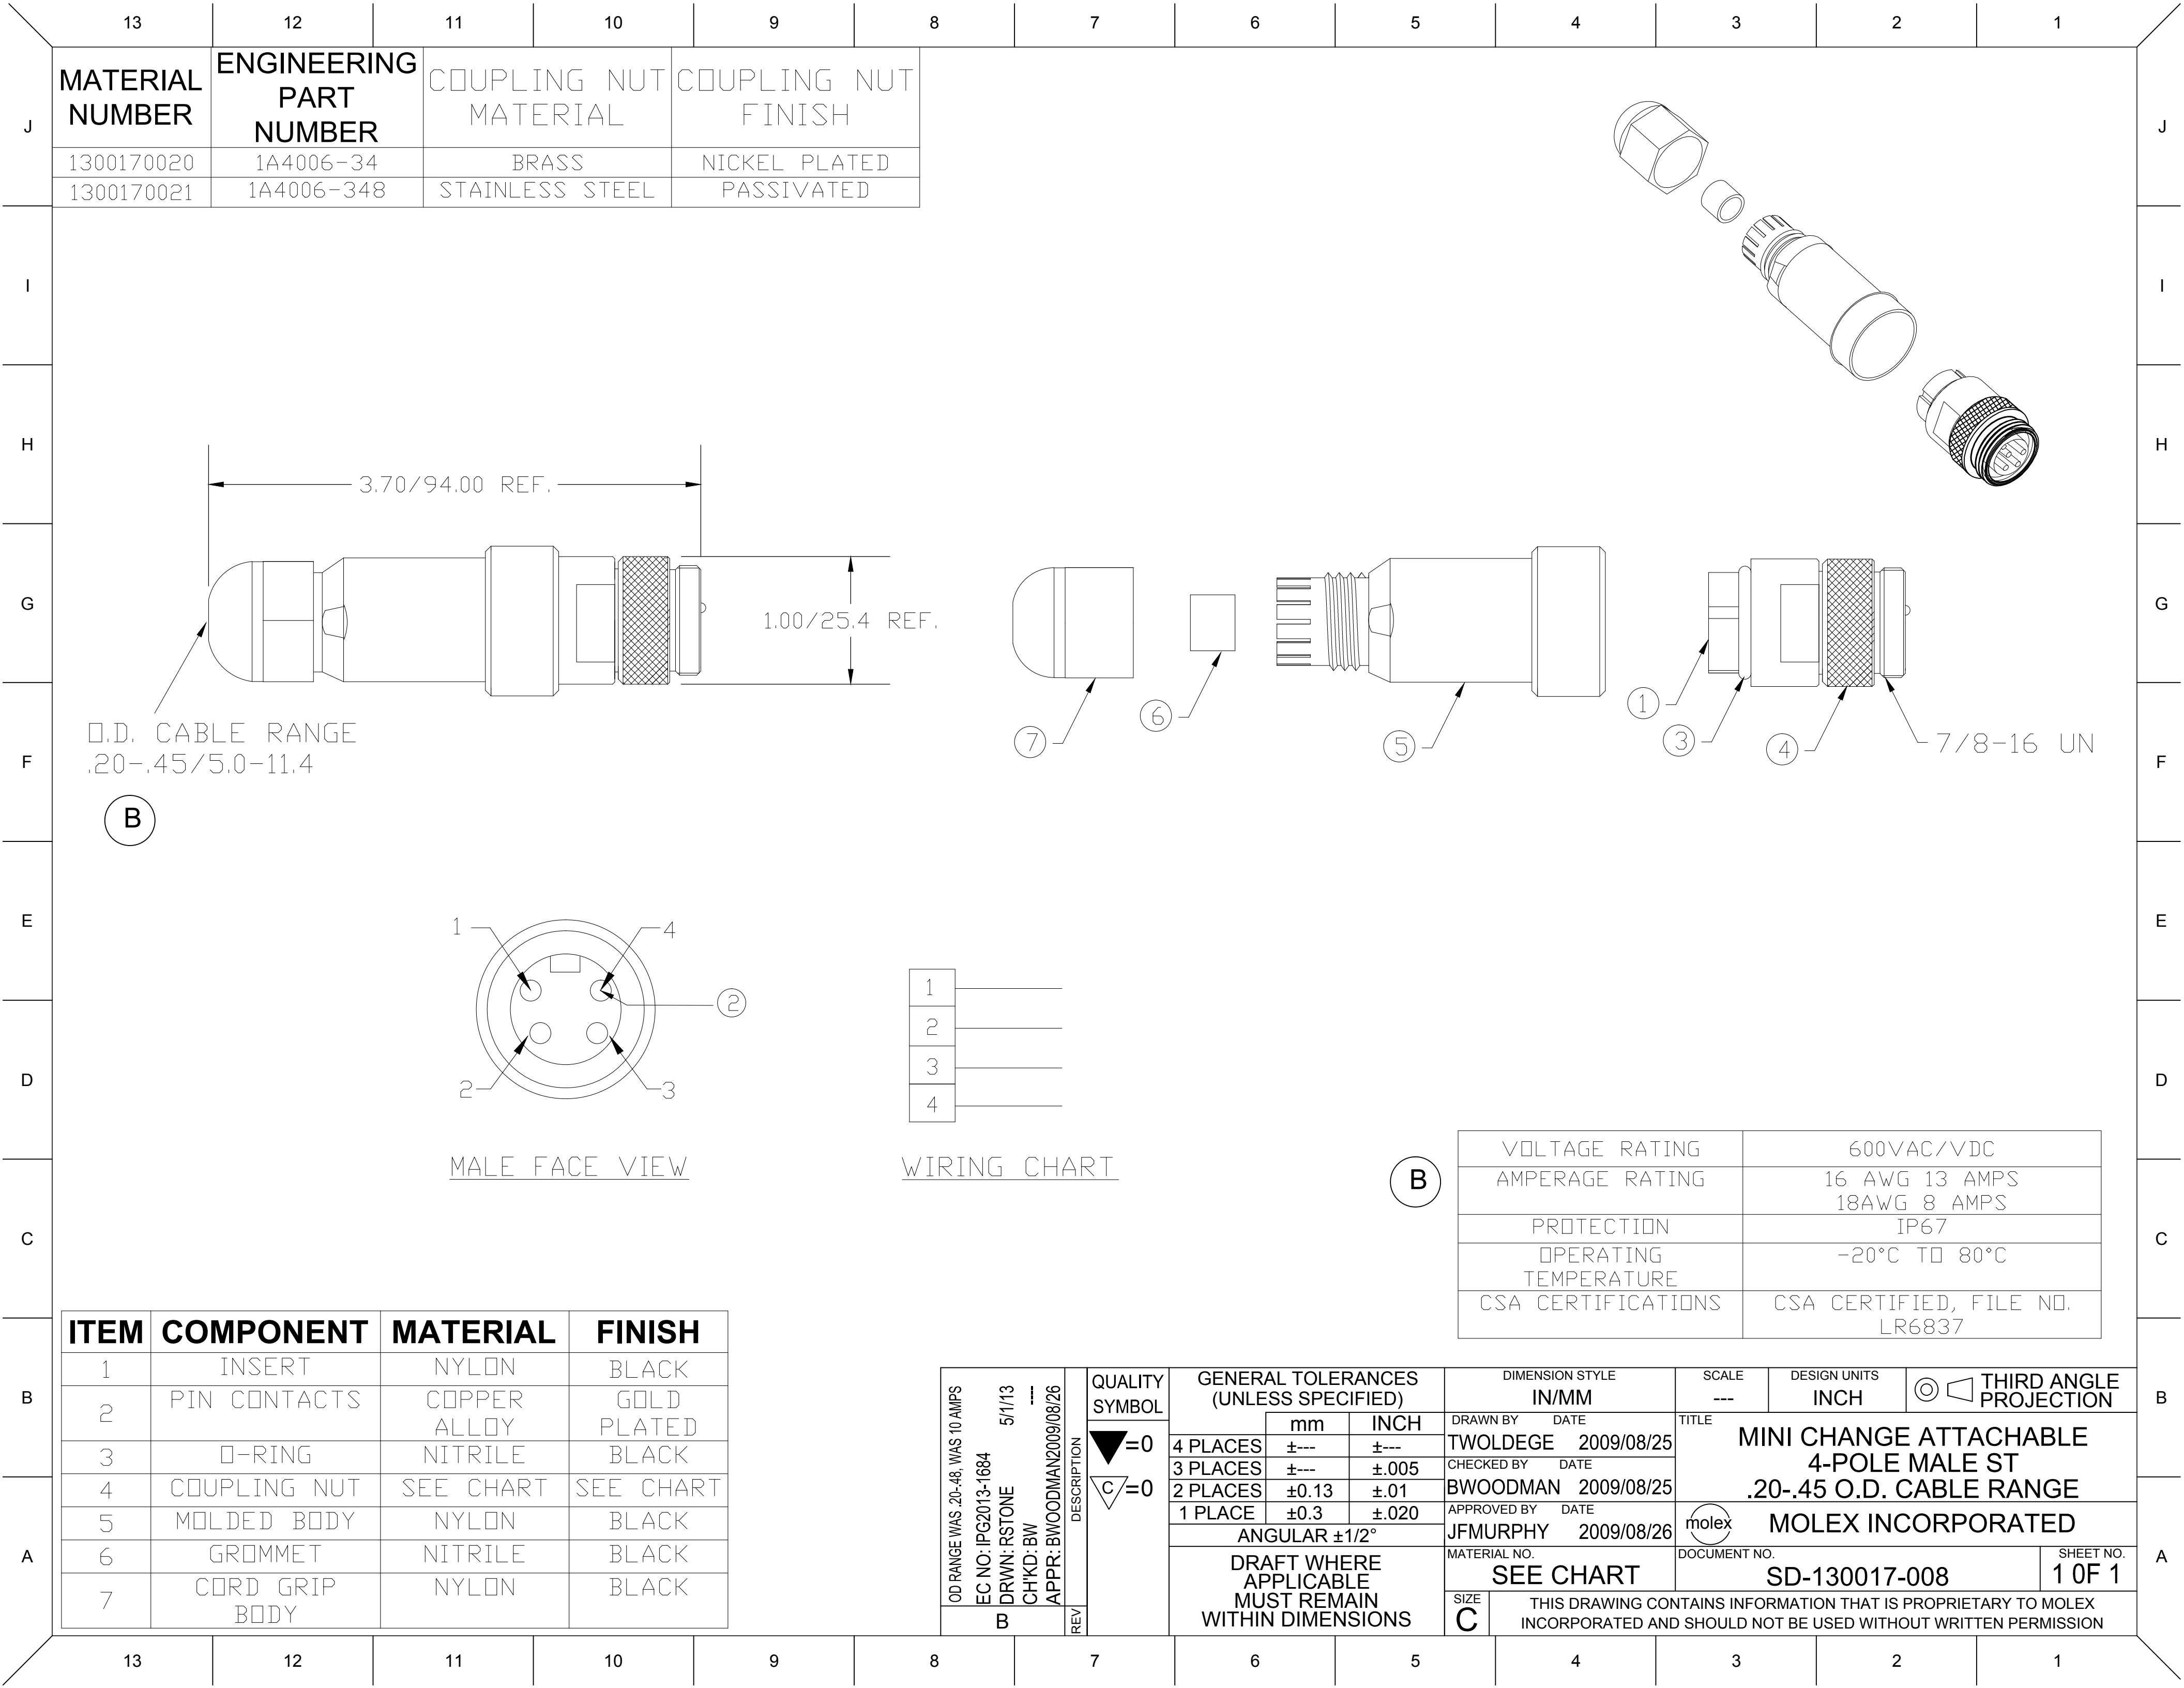



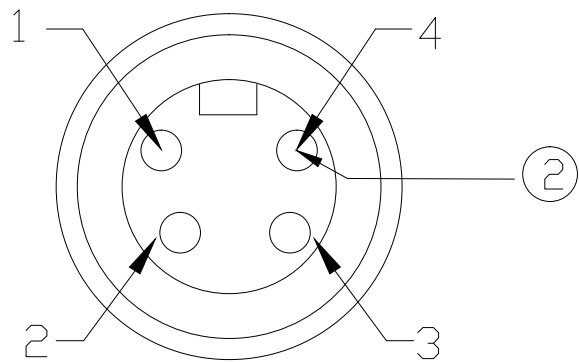

MATERIAL NUMBER	ENGINEERING PART NUMBER	COUPLING NUT MATERIAL	COUPLING NUT FINISH
1300170020	1A4006-34	BRASS	NICKEL PLATED
1300170021	1A4006-348	STAINLESS STEEL	PASSIVATED

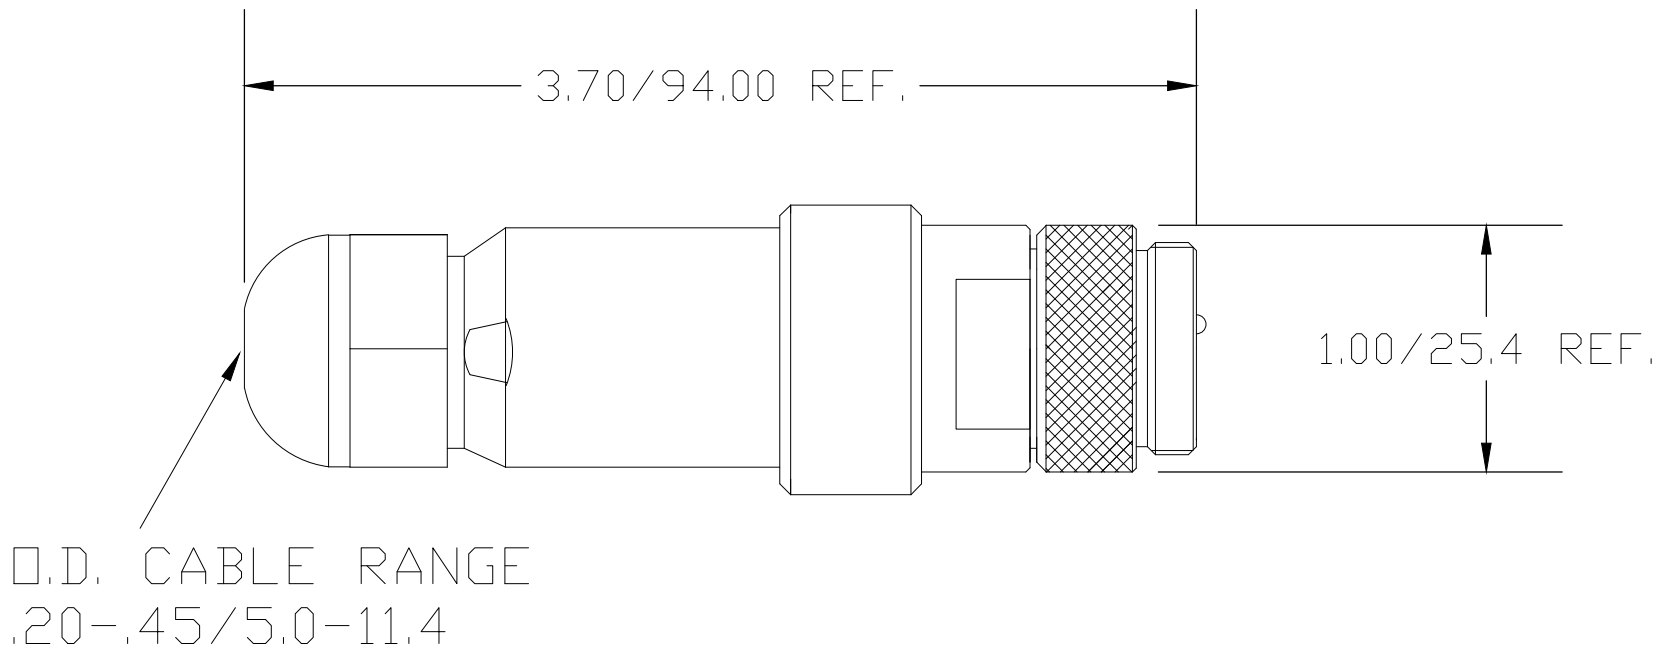

(B)

VOLTAGE RATING	600VAC/VDC
AMPERAGE RATING	16 AWG 13 AMPS 18AWG 8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	PIN CONTACTS	COPPER ALLOY	GOLD PLATED
3	O-RING	NITRILE	BLACK
4	COUPLING NUT	SEE CHART	SEE CHART
5	MOLDED BODY	NYLON	BLACK
6	GROMMET	NITRILE	BLACK
7	CORD GRIP BODY	NYLON	BLACK

OD RANGE WAS .20-.48, WAS 10 AMPS		EC NO: ICG2013-1684		DRWN: RSTONE 5/1/13		CH'KD: BW		APPR: BWOODMAN2009/08/26		DESCRIPTION REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM			SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION				
B											 =0					DRAWN BY DATE		TITLE MINI CHANGE ATTACHABLE 4-POLE MALE ST .20-.45 O.D. CABLE RANGE						
											4 PLACES		±---		±---		TWO					LDEGE 2009/08/25		
											3 PLACES		±---		±.005		CHECKED BY DATE							
											2 PLACES		±0.13		±.01		BWOODMAN 2009/08/25		MOLEX INCORPORATED					
											1 PLACE		±0.3		±.020		APPROVED BY DATE							
													JFMURPHY 2009/08/26		DOCUMENT NO.		SD-130017-008		SHEET NO.					
																			1 OF 1					