APPROVED: _____

DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 9/14/11 | |
| A | | ADDED SPEC. | 6/27/13 | |

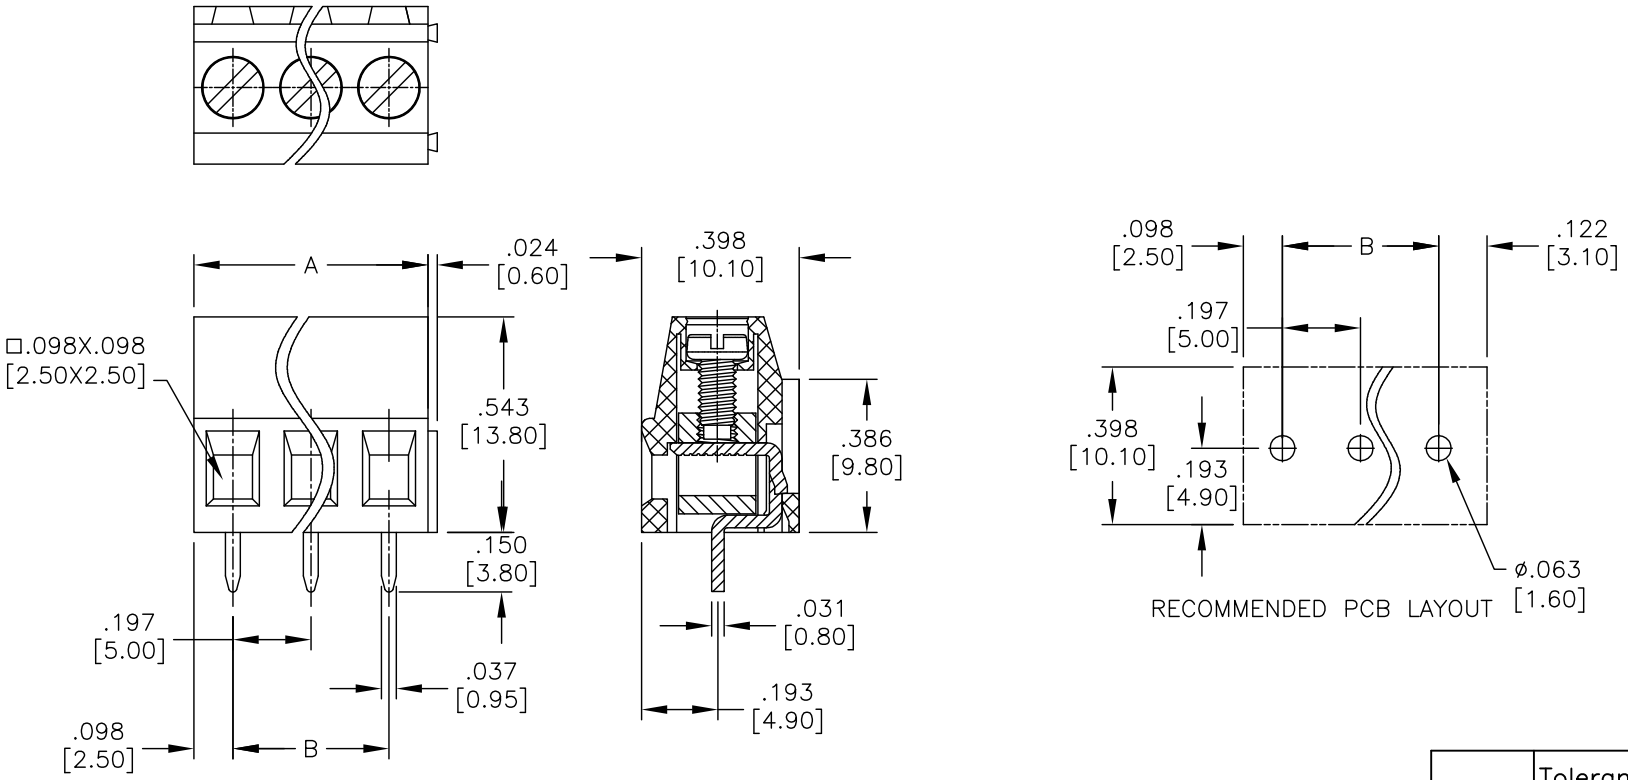


| | Tolerance |
|---|---|
| 2–6P | ±.006 [0.15] |
| 7–12P | ±.008 [0.20] |
| 13–18P | ±.012 [0.30] |
| 19–24P | ±.016 [0.40] |

**SPECIFICATIONS:**

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Screw: M2.5, Steel, Zn plated.
Contact: Brass, Tin plated.

Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps

Mechanical:
Solid wire (AWG): 12–24
Stranded wire (AWG): 12–24
Withstanding Voltage: 1.6KV
Wire strip length: 6–7mm

Temperature Rating:
Operating temperature: –40°C to +115°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 2 thru 24
A = .197 [5.00] X No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | AY | 9/14/11 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710


TITLE
EURO BLOCK, .197" [5.00] PITCH

| SIZE | PART NO. | REV. |
|---|---|---|
| X | EB20-XX-C | - |

REF: S00007T | SCALE: NTS | SHEET 1 OF 1