


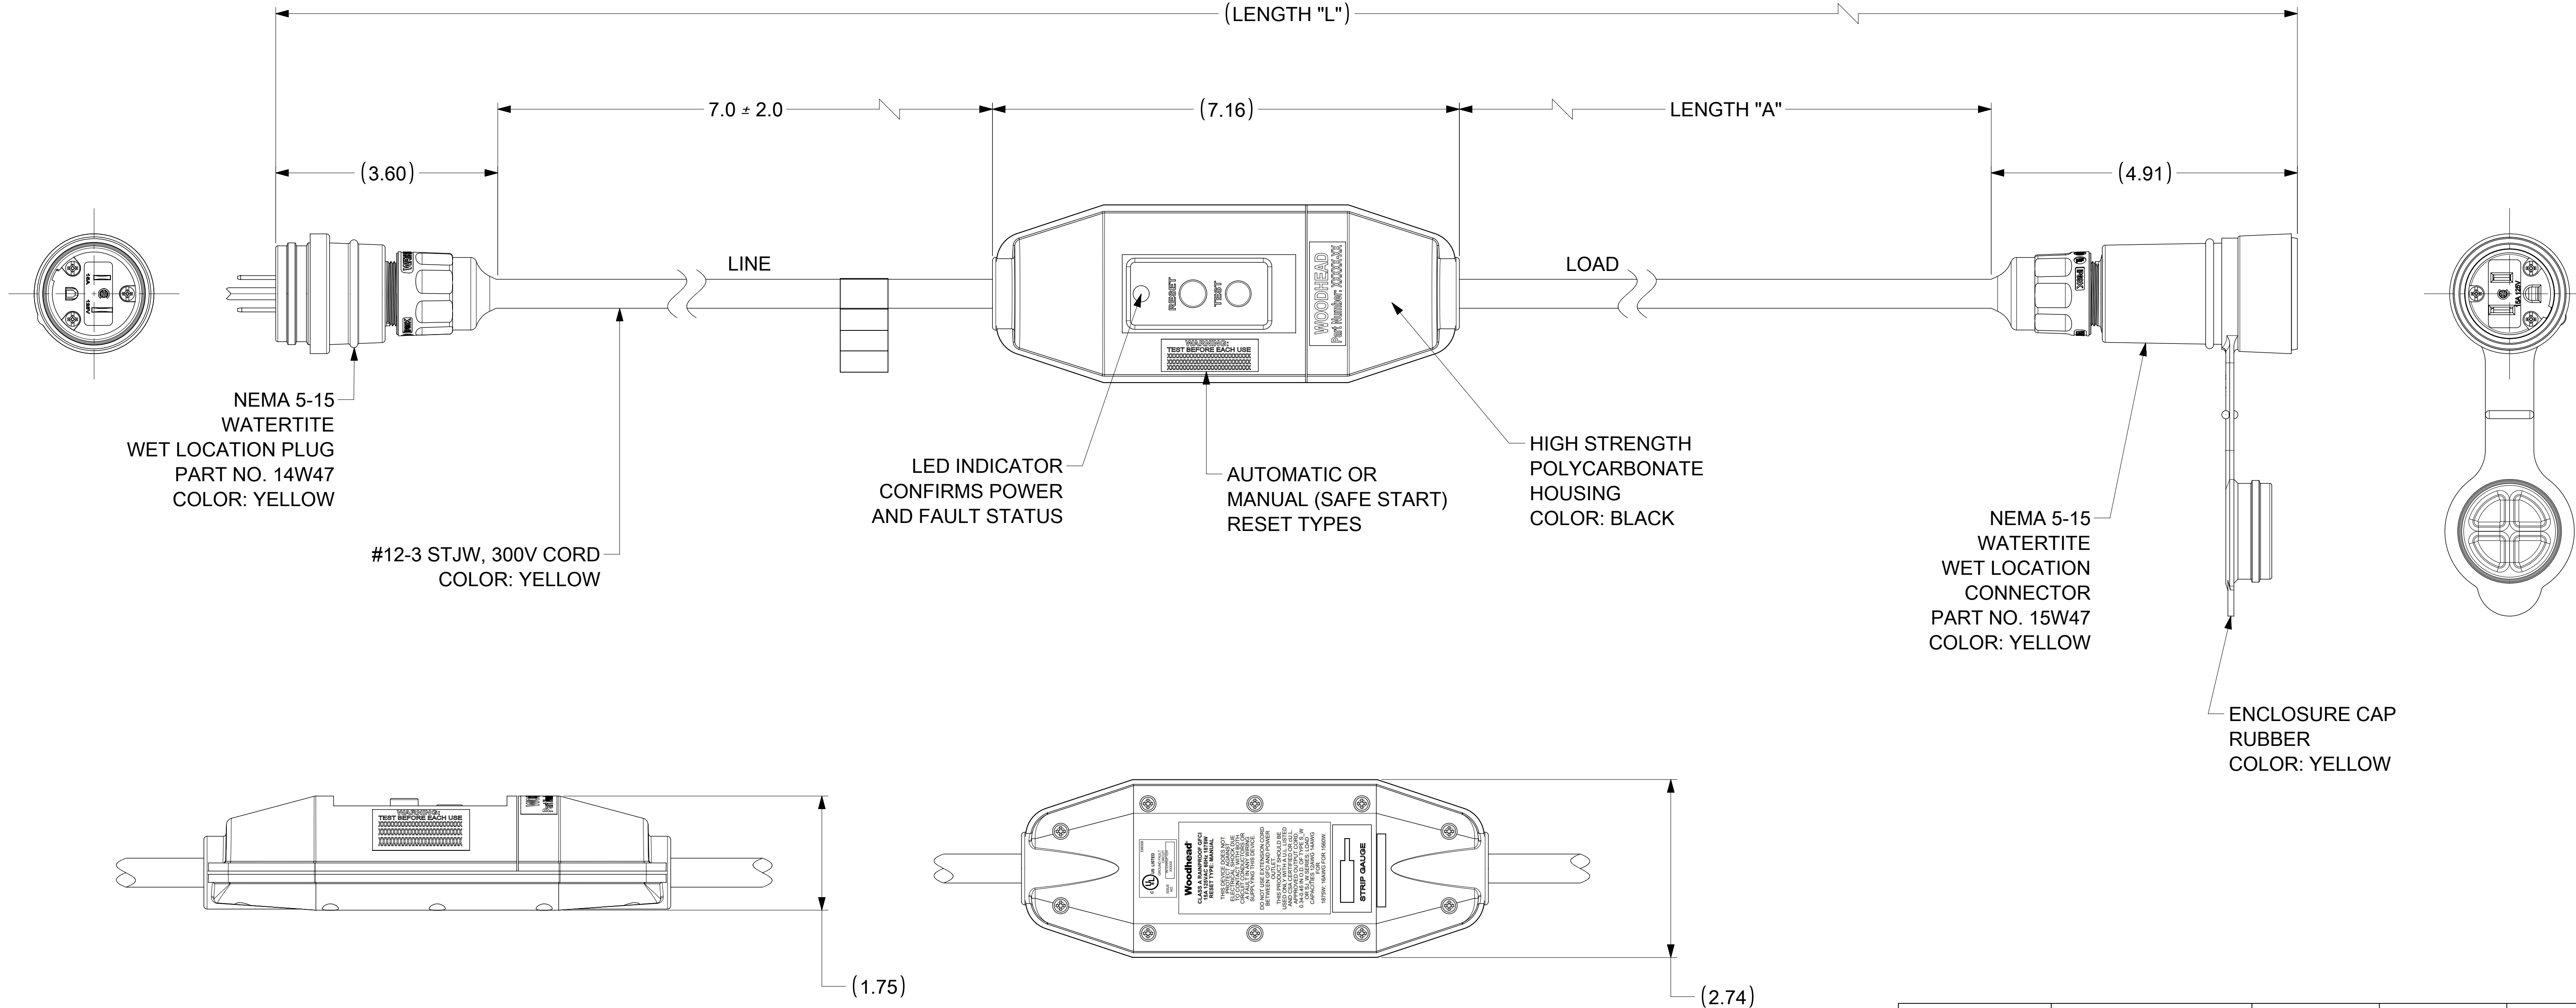

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530056	15052-1A	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530068	15052-6A	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530061	15052-25A	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530065	15052-50A	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530059	15052-1M	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530070	15052-6M	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530063	15052-25M	25 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530066	15052-50M	50 FT 8 IN	50 FT ± 4 IN	MANUAL

TECHNICAL:

LISTED: UL AND cUL
RATED SUPPLY VOLTAGE: 120 VAC
RATED CURRENT: UP TO 15 AMPS OR CABLE RATING
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	= 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX				molex			
		INCH		NTS									
	= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 629866 DRWN: PPURSUTANDEL 2019/11/11 CHK'D: DNGUYEN62 2020/01/09 APPR: HKNEELAND 2020/02/05							
	= 0												
	= 0	MM		INCH		PRODUCT CUSTOMER DRAWING							
	= 0	4 PLACES	±			DOCUMENT NUMBER SD-130153-016							
	= 0	3 PLACES	±	± 0.005									
	= 0	2 PLACES	±	0.13	± 0.01	SD		001		A1			
	= 0	1 PLACE	±	0.25	± 0.02	INITIAL REVISION:		DRAWING		SERIES			
	= 0	0 PLACES	±	±		DRWN: HRUIZ01 2013/02/07		MATERIAL NUMBER		CUSTOMER			
	= 0	ANGULAR TOL		± 0.5 °		APPR: JFMURPHY 2015/04/20		SEE TABLE		NORTH SHORE SAFETY			
	= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		SHEET NUMBER		1 OF 1			
	= 0							D-SIZE		130153			

DOCUMENT STATUS	P1	RELEASE DATE	2020/02/05	18:23:45
-----------------	----	--------------	------------	----------