

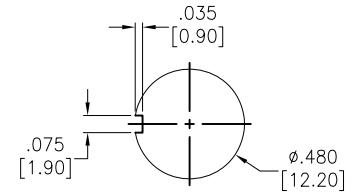
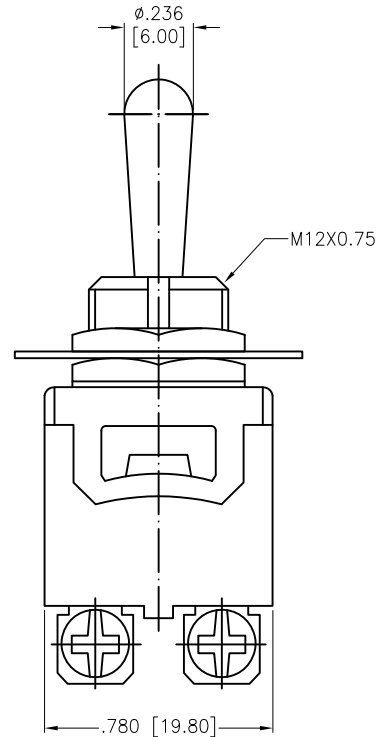


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/20	

APPROVED: _____
DATE: _____ TITLE: _____

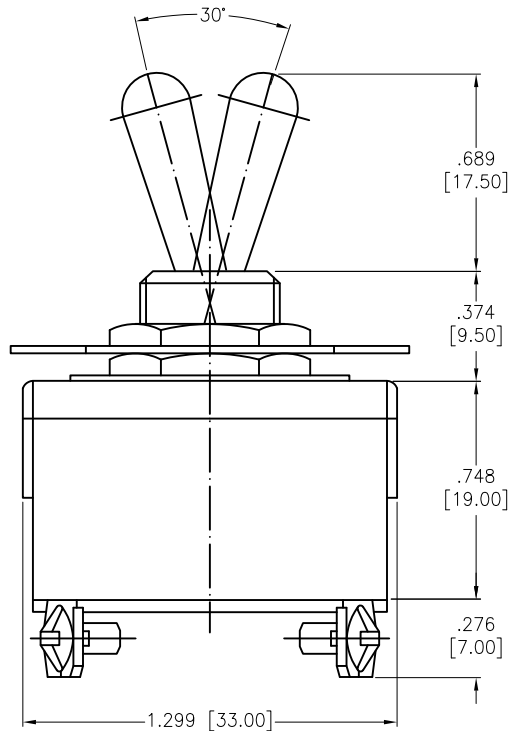

RECOMMENDED
PANEL CUT-OUT



CIRCUIT DIAGRAM
(DPST)

SW-T1-3X-D-K2
—A=ON-OFF
—C=OFF-(ON)

SPECIFICATIONS:

Material:

Body: Bakelite, Color: Black

Lever: Brass, Nickel plated

Terminal: Brass, Silver plated

Electrical:

Rating: 10A @ 250V AC

15A @ 125V AC

Contact resistance: 50 mΩ max

Insulation resistance: 1000 MΩ min (500VDC)

Dielectric withstanding voltage: 1500V AC for 1 minute

Electrical Life: 10,000 cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	OW	11/12/20
CHECKED	AC	11/12/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE SWITCH, TOGGLE MEDIUM, DPST,
ON-OFF, OFF-(ON), SCREW LUG

SIZE X	PART NO. SW-T1-3X-D-K2	REV. -
REF: S00204C	SCALE: NTS	SHEET 1 OF 1