

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
V3L-1084

CQ-L9933

REPLACES X89865-V3L

RELEASE NO. PR-16900

CATALOG LISTING

V3L-1084

M

ISSUE
2

CHECK

REVISIONS



A CO 76446
DCS
1 FEB 94

CHECK

CHECK

G R T 15 NOV 88


DDM/CAD
DRAWN

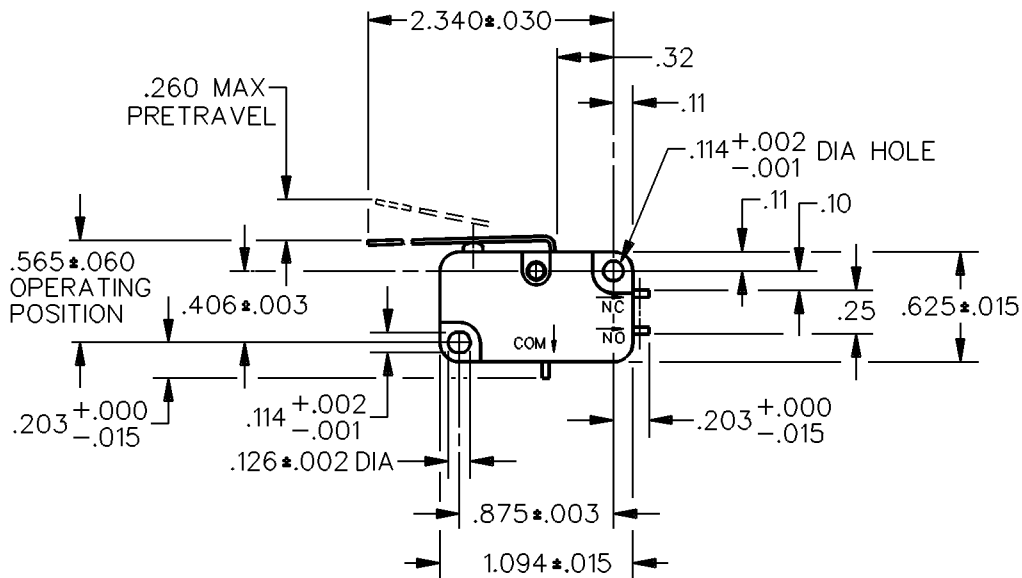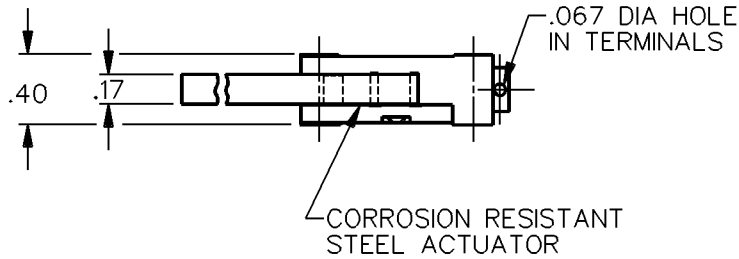

NOTE
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 4 OZ MAX
RELEASE FORCE — — — 1/2 OZ MIN
DIFFERENTIAL TRAVEL — — .090 MAX
OVERTRAVEL — — — .150 MIN
RELEASE TRAVEL — — — .021 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT