

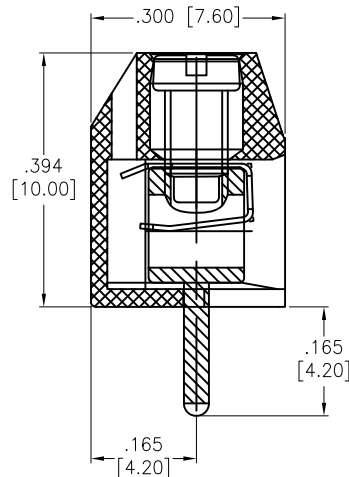
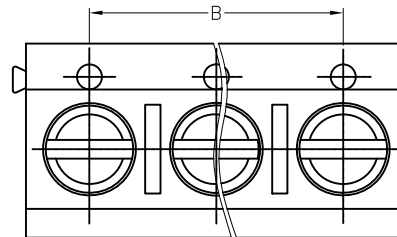


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/29/14	
A		UPDATE SPEC.	8/22/17	AY/RC1
B		UPDATE DRAWING	2/13/20	AY/RT
C		UPDATE DRAWING	2/23/21	LH/EY

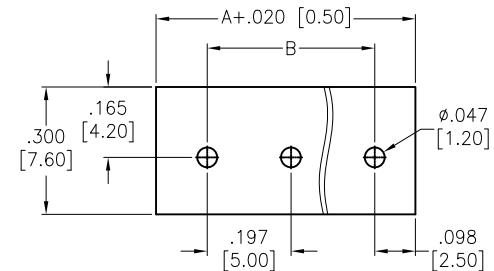

SECTION A-A

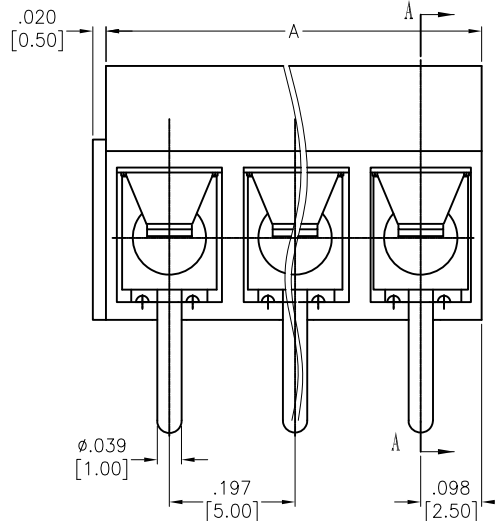

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
Insulator: PA66, rated UL 94V-0
Insulator color: Blue
Screw: M2.5, Steel, Zinc plated.
Contact: Copper Alloy, Tin plated.
Shrapnel: Stainless Steel
Electrical:
Voltage rating: 250 V
Current rating: 16 A
Withstanding voltage: 1,500 VAC for 1 minute
Mechanical:
Torque: 0.4N-m
Wire Range: 22-14AWG
Strip Length: 5-6mm
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.



Positions: 2 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE	
DRAWN	AY	9/29/14	
CHECKED	GC	9/29/14	
APPROVED			
TITLE		EURO BLOCK, .197 [5.00] PITCH, SLOTTED SCREW	
SIZE	PART NO.	REV.	
X	EBBA-XX-C-SS-BU	C	
REF: S00067C		SCALE: NTS	SHEET 1 OF 1