



ISL Products International

ø 37mm Spur Gear Motor
Carbon - Brushed
MOT-RA37GM12V330R

Our Spur Gear Motors are an inline solution providing ample torque output at various speeds. They are best for intermittent duty operation. With endless performance combinations, we have a fully tailored gear motor solution for you.




[View Alternative Solutions!](#)

Specifications

Gearhead Type:	Spur	No-Load Speed:	375 rpm (+/- 10%)
Motor Type:	Carbon - Brushed	No-Load Current:	< 300 mA
Rated Voltage:	12V DC	Stall Torque:	21 kg.cm
Rated Speed:	330 rpm	Max. Power:	20 W
Rated Torque:	2.5 kg.cm	Reduction Ratio:	16:1
Rated Current:	1.6 A	Termination Style:	Terminals

Dimensions

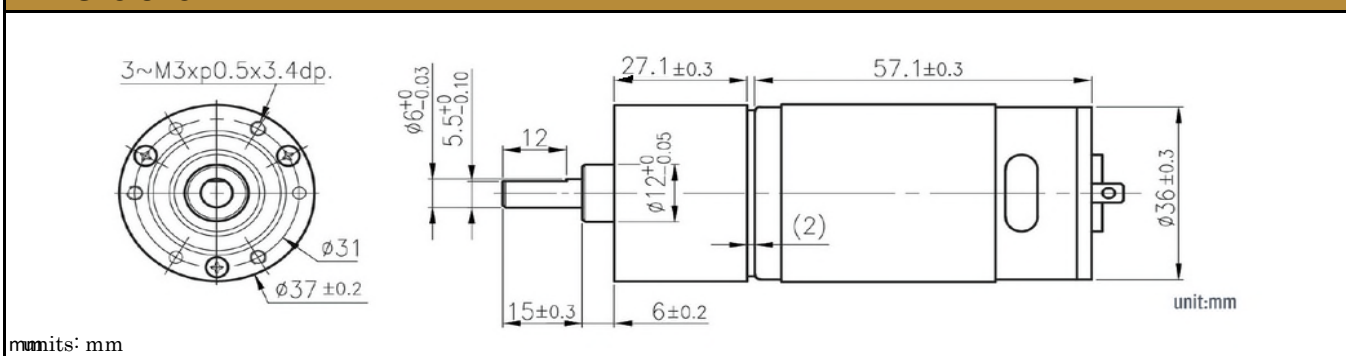

Performance Curve

