

CMPT3820

**SURFACE MOUNT
VERY LOW $V_{CE(SAT)}$
NPN SILICON TRANSISTOR**

**SOT-23 CASE****APPLICATIONS:**

- DC/DC Converters
- Voltage Clamping
- Protection Circuits
- Battery powered Cell Phones, Pagers, Digital Cameras, PDAs, Laptops, etc.

MAXIMUM RATINGS: ($T_A=25^\circ C$)

Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}	60	V
Emitter-Base Voltage	V_{EBO}	5.0	V
Continuous Collector Current	I_C	1.0	A
Peak Collector Current	I_{CM}	2.0	A
Continuous Base Current	I_B	300	mA
Power Dissipation	P_D	350	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	°C
Thermal Resistance	Θ_{JA}	357	°C/W

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CBO}	$V_{CB}=60V$		100	nA
I_{EBO}	$V_{EB}=5.0V$		100	nA
BV_{CBO}	$I_C=100\mu A$	80		V
BV_{CEO}	$I_C=10mA$	60		V
BV_{EBO}	$I_E=100\mu A$	5.0		V
$V_{CE(SAT)}$	$I_C=100mA, I_B=1.0mA$		0.115	V
$V_{CE(SAT)}$	$I_C=500mA, I_B=50mA$		0.15	V
$V_{CE(SAT)}$	$I_C=1.0A, I_B=100mA$		0.28	V
$V_{BE(SAT)}$	$I_C=1.0A, I_B=50mA$		1.1	V
$V_{BE(ON)}$	$V_{CE}=5.0V, I_C=1.0A$		0.9	V
h_{FE}	$V_{CE}=5.0V, I_C=1.0mA$	200		
h_{FE}	$V_{CE}=5.0V, I_C=500mA$	200		
h_{FE}	$V_{CE}=5.0V, I_C=1.0A$	100		
f_T	$V_{CE}=10V, I_C=50mA$	150		MHz
C_{ob}	$V_{CB}=10V, I_E=0, f=1.0MHz$		10	pF

www.centralsemi.com**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMPT3820 is a very low $V_{CE(SAT)}$ NPN Transistor, designed for applications where size and efficiency are prime requirements. Packaged in an industry standard SOT-23, this device brings updated electrical specifications and characteristics suitable for the most demanding designs.

MARKING CODE: 38C**FEATURES:**

- Device is **Halogen Free** by design
- High Current ($I_C=1.0A$)
- $V_{CE(SAT)}=0.28V$ MAX @ $I_C=1.0A$
- SOT-23 surface mount package
- Complementary PNP device **CMPT7820**

SYMBOL

V_{CBO}	80	V
V_{CEO}	60	V
V_{EBO}	5.0	V
I_C	1.0	A
I_{CM}	2.0	A
I_B	300	mA
P_D	350	mW
T_J, T_{stg}	-65 to +150	°C
Θ_{JA}	357	°C/W

UNITS


R1 (1-February 2010)

CMPT3820

SURFACE MOUNT
VERY LOW V_{CE(SAT)}
NPN SILICON TRANSISTOR

Central
Semiconductor Corp.™

SOT-23 CASE - MECHANICAL OUTLINE

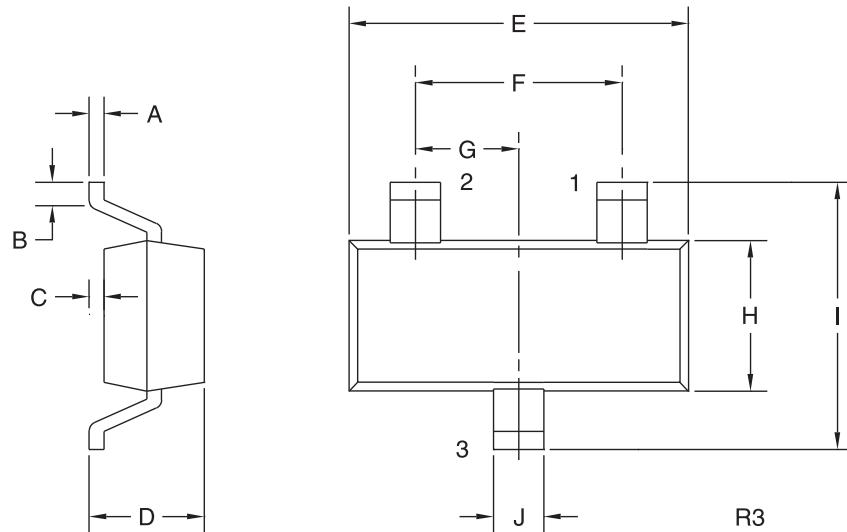

LEAD CODE:

- 1) Base
- 2) Emitter
- 3) Collector

MARKING CODE: 38C

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)

R1 (1-February 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.

145 Adams Avenue

Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110

Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives:

www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms