
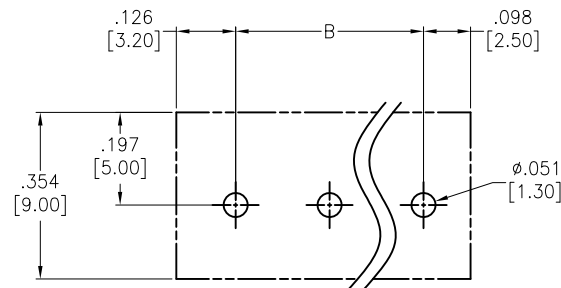




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/11	
A		UPDATE DRAWING	11/20/20	OW/RC



RECOMMENDED PCB LAYOUT

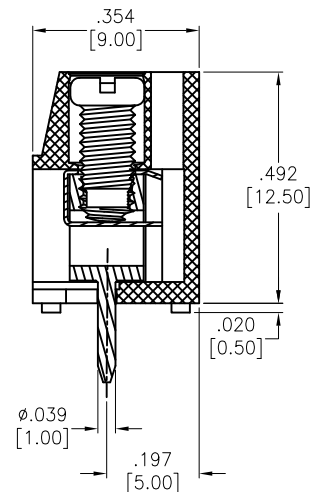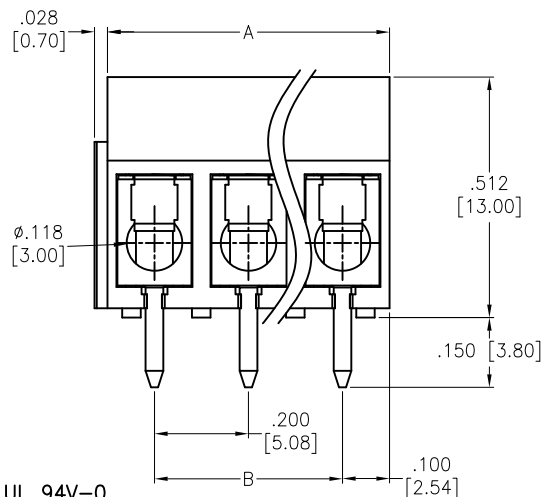

Pole	A	B
02-06P	±.008 [0.20]	±.006 [0.15]
07-12P	±.010 [0.25]	±.008 [0.20]
13-18P	±.012 [0.30]	±.010 [0.25]
19-24P	±.016 [0.40]	±.012 [0.30]

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Blue

Terminal: Brass, Tin plated

Wire guard: Stainless steel

Screw: Steel, M3, Zinc plated.

Electrical:

Voltage rating: 300VAC

Current rating: 15A

Withstanding voltage: 1.6KV

Mechanical:

Torque: 3.5 Lb-In

Solid wire(AWG): 14-22

Stranded wire(AWG): 14-22

Wire strip length: 6-7mm

Temperature Rating:

Operating temperature: -40°C to +115°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .200 [5.08] x No. of Positions

B= .200 [5.08] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	DY	6/08/11
CHECKED		
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
EURO BLOCK, VERTICAL, PCB TYPE
.200 [5.08] PITCH, COLOR BLUE

SIZE	PART NO.	REV.
X	EBA-XX-D-BU-01	A
REF: S00007T		SCALE: NTS
		SHEET 1 OF 1