


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---------------------------------------|------|------|-----|
| 10/22/05 | A | Added "ROHS COMPLIANT" | T.B. | B.S. | |
| 08/28/14 | B | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| 02/17/17 | C | DIM. 97.00 WAS 96.77 UPDATED NOTES | T.B. | B.S. | |
| | | | | | |
| | | | | | |

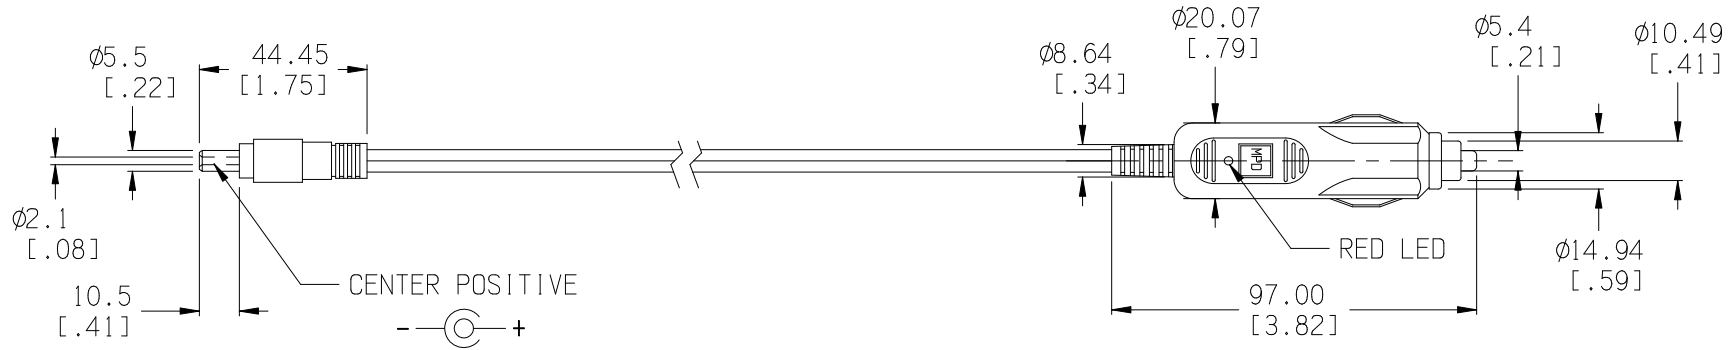

ROHS 2 COMPLIANT

RATED FOR 5 AMPS. CONTINUOUS DUTY FOR 18 HRS

BILL OF MATERIAL

| BILL OF MATERIAL | | | Tolerance (Inches) | MPD Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735 | |
|---|------|--|--------------------|---|--------------------------|
| PART # | QTY. | DESCRIPTION | | Scale | Drawn By B.S. |
| APP-001 | 1 | CIGARETTE PLUG FOR 21 OR 22.2mm DIA. SOCKETS | Decimal | | |
| PLUG | 1 | DC MOLED PLUG, 2.1 x 5.5mm | ±.5 (.020) | | Approved By T.B. |
| FUSE | 1 | 3AG (6.35 x 30mm), 5 AMP. | Fractional | Title | |
| CORD | 1 | SPT-1, 18 AWG, 105°C, UL-VW-1 | ± .8 (.030) | 6' AUTO POWER CORD SET WITH 2.1mm DC PLUG | |
| CIGARETTE PLUG HOUSING: HIGH IMPACT ABS FLAMMABILITY RATED: UL94-HB, FILE NO. E56070 H.D.T. IS 85°C | | | Angular ± 3° | Date 02/17/17 | Drawing Number ZA5073 |