

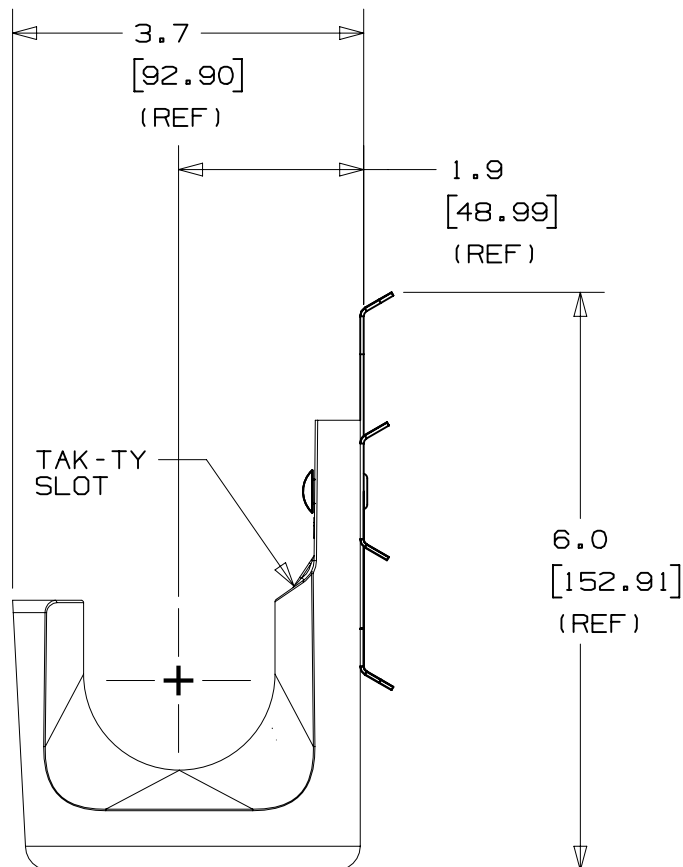


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

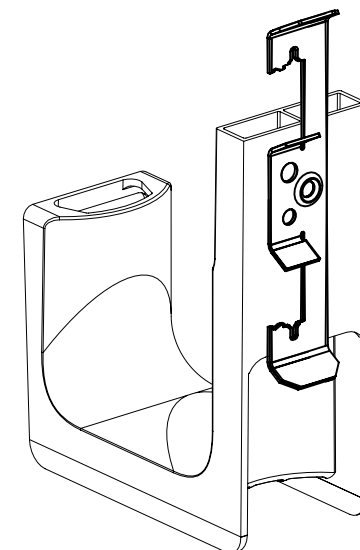


PANDUIT PART NO.	APPLICATION OPTIONS	WEIGHT lbs 10 (g) pcs
JP2DW- ----	#12 WIRE, UP TO 3/8" DIAMETER THREADED ROD, OR 1/8"-3/8" FLANGES	1.58 (720.0)

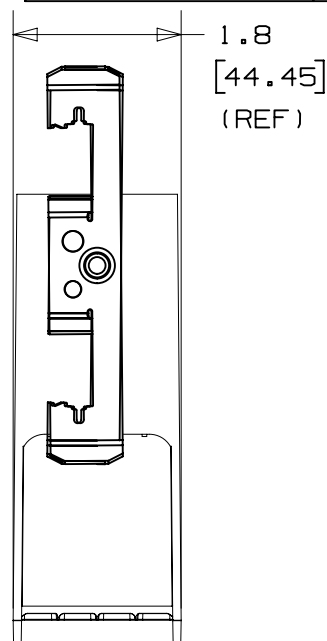

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
- HOOK MATERIAL: NYLON 6/6
RIVET MATERIAL: ALUMINUM
CLIP MATERIAL: SPRING STEEL
- PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 2" (50.8) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 10 lbs.
- PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
- PRODUCT MARKINGS:
cULus logo and statement:
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
ULC logo and statement:
"IN ACCORDANCE WITH CAN/ULC S-102.2 IN SINGLE UNITS OR PAIRS, 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=20."

02A	5/27/14	PMNG	DJW	KLN	ROTATED DROPWIRE TO CORRECT POSITION, UPDATED BORDER	GAECN02007
01A	10/26/10	APW	DJW		ROTATED DROPWIRE TO CORRECT POSITION ADDED PRODUCT NUMBER	GB2888FI
2	4/7/05	JAD			COMPLETELY REVISED, RE-RELEASE WITH NEW GEOMETRY	GB2888FI

TITLE				JP2DW-___ J-PRO J-HOOK DROP WIRE AND THREADED ROD CLIP CUSTOMER DRAWING	
ITEM REVISION NAME				10K016BC/02	
DATASET FILE NAME				10K016BC_DC_GB2888FI/02A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 ° 				PANDUIT	
THIRD ANGLE PROJECTION				MATERIAL: SEE NOTE 2	
DRAWING NUMBER:				GB2888F I	
DRAWN BY	DATE	CHK	SCALE	SIZE	
JAD	4/7/04	KLN	NONE	SHT 1 OF 1	
				A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
-----	------	----	-----	-----	-------------	-----