Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/15	

APPROVED: _____

DATE: _____ TITLE: _____

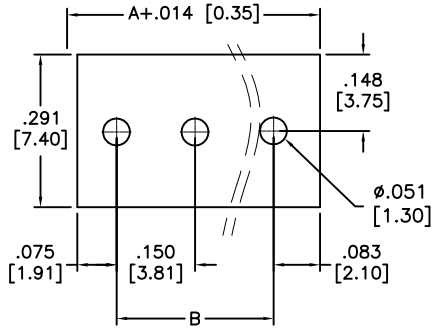

RECOMMENDED P.C.B LAYOUT

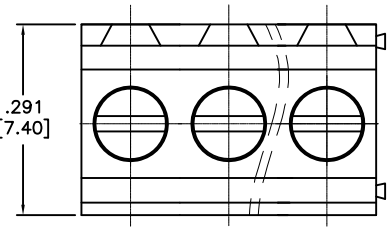

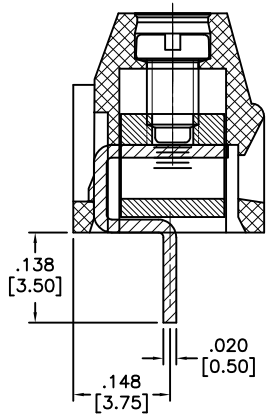

SECTION A–A

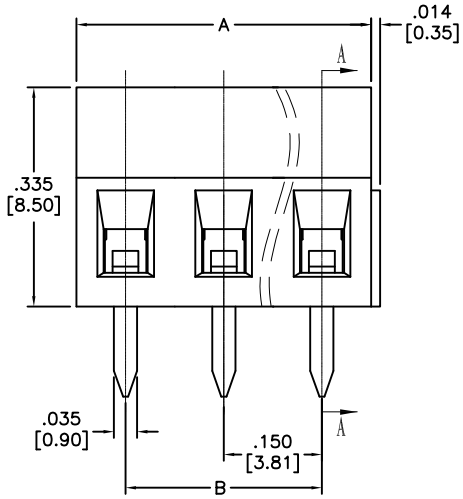

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V–0
Insulator color: Green
Contact: Brass, Tin plated
Screw: Steel, M2/Zinc plated
Electrical:
Voltage rated: 300 VAC max
Current rated: 10 Amps max
Contact resistance: 20 mΩ
Insulation resistance: 500 MΩ/ 500VDC
Withstanding voltage: 2000 VAC for 1 minute
Mechanical:
Torque: 0.2Nm (1.8 lb.in)
Wire Range: 28–16Awg 1.0mm²
Strip Length: 4–5mm
Environmental:
Operating temperature: –40°C to +105°C
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2 thru 24
A = .150 [3.81] x No. of Positions
B = .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/13/15
CHECKED	GC	1/13/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE
TERMINAL BLOCK, PCB, VERTICAL, .150 [3.81] PITCH

SIZE	PART NO.	REV.
X	EBWA-XX-B	-

REF: S00067C | SCALE: NTS | SHEET 1 OF 1