

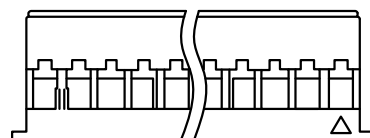
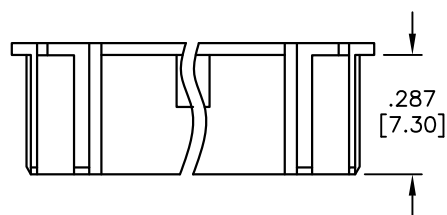


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/23/10	
A		UPDATE SPEC.	6/27/16	AY/SC

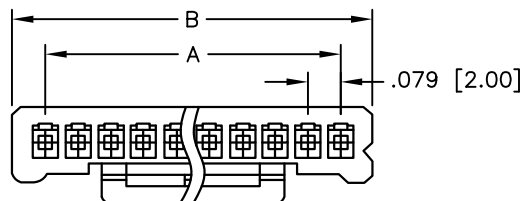

SPECIFICATIONS:

Material:

Insulator: NY66, rated UL 94V-0

Insulator color: Natural

Electrical:

Voltage rating: 250 VAC/DC

Current rating: 3A AC/DC max, 22AWG

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 15

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS DRAWN AY 11/23/10 CHECKED AH 11/23/10 APPROVED			TITLE .079 [2.00] CRIMP HOUSING		
SIZE X		PART NO. 2CH-H-XX		REV. A	
REF: S00015T		SCALE: NTS		SHEET 1 OF 1	