
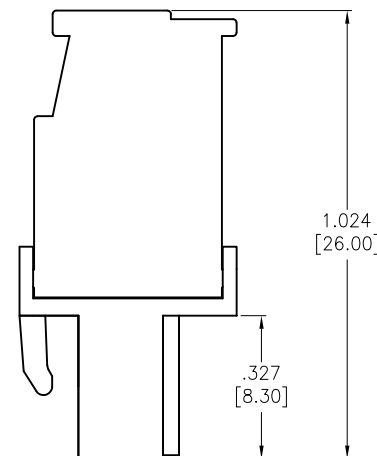
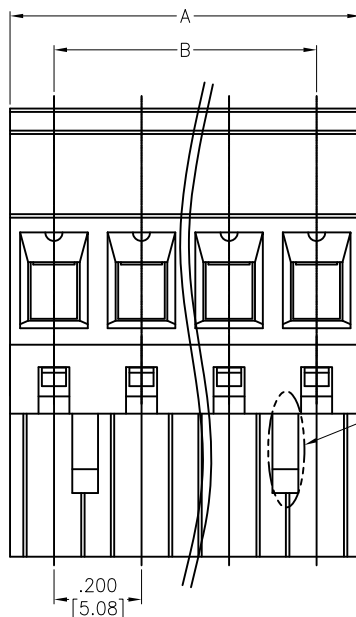


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/2/14	
A		UPDATE DRAWING	10/20/20	LH/EY

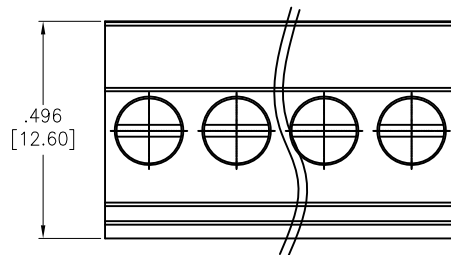

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Wire guard: M3,

Contact: Copper Alloy, Nickel Plated

Electrical:

Voltage rated: 300 V

Current rating: 15 Amp

Dielectric withstanding voltage: 1,600 V for 1 minute

Wire range: 28-12 AWG

Torque: 0.2 N-m

Wire strip length: 7-8mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 24

A = .200 [5.08] x No. of Positions

B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	5/2/14
CHECKED	SY	5/2/14
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
EURO BLOCK, .200 [5.08] PITCH			
SIZE X	PART NO. EB9A-XX-D	REV. A	
REF: S00067C	SCALE: NTS	SHEET 1 OF 1	