


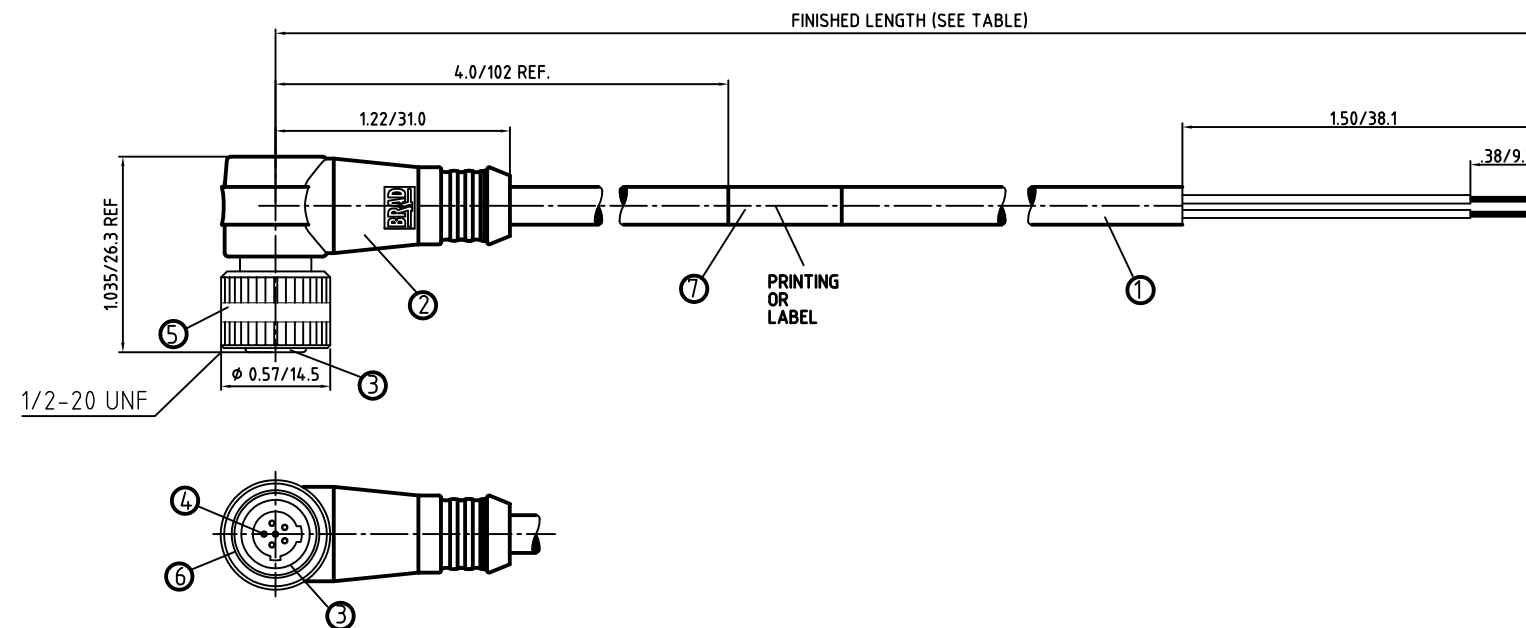


FRONT VIEW - FEMALE INSERT WIRING COLOR CODE VISTA FRONTAL - INSERTO HEMBRA				
2 POLE 1-BROWN CAFE 2-BLUE AZUL	3 POLE 2-RED W/BLK.TR. ROJO/NEGRO 1-GREEN VERDE 3-RED W/WHT.TR. ROJO/BLANCO	4 POLE 1-RED W/BLK.TR. ROJO/NEGRO 2-RED W/WHT.TR. ROJO/BLANCO 4-GREEN VERDE (TIERRA) 3-RED ROJO	5 POLE 1-RED W/WHT.TR. ROJO/BLANCO 5-RED W/BLK.TR. ROJO/NEGRO 4-RED W/YEL.TR. ROJO/AMARILLO 2-RED ROJO 3-GREEN (GND) VERDE (TIERRA)	6 POLE 5-RED W/BLK.TR. ROJO/NEGRO 1-RED W/WHT.TR. ROJO/BLANCO 4-RED W/YEL.TR. ROJO/AMARILLO 2-RED ROJO 3-GREEN (GND) VERDE (TIERRA) 6-RED W/BLUE TR. ROJO/AZUL

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	NITRILE	RED
5	COUPLING NUT	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 18 AWG (41x#34 COPPER STRANDING) 2-6 CONDUCTORS 300V	PVC	YELLOW

DESCRIPTION EC NO.: WEU2010-0417 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 08.03.10 2010/03/10	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		 = 0		mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/05	MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY FE 90 #18/2-6 YELLOW PVC CABLE			
		 = 0	4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/03/09				
			3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/03/09				
			2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE SHEET 2		DOCUMENT NO. SD-120072-011		SHEET NO. 1 OF 2	
			1 PLACE	±0.3	±---						
			ANGULAR ± --- °			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

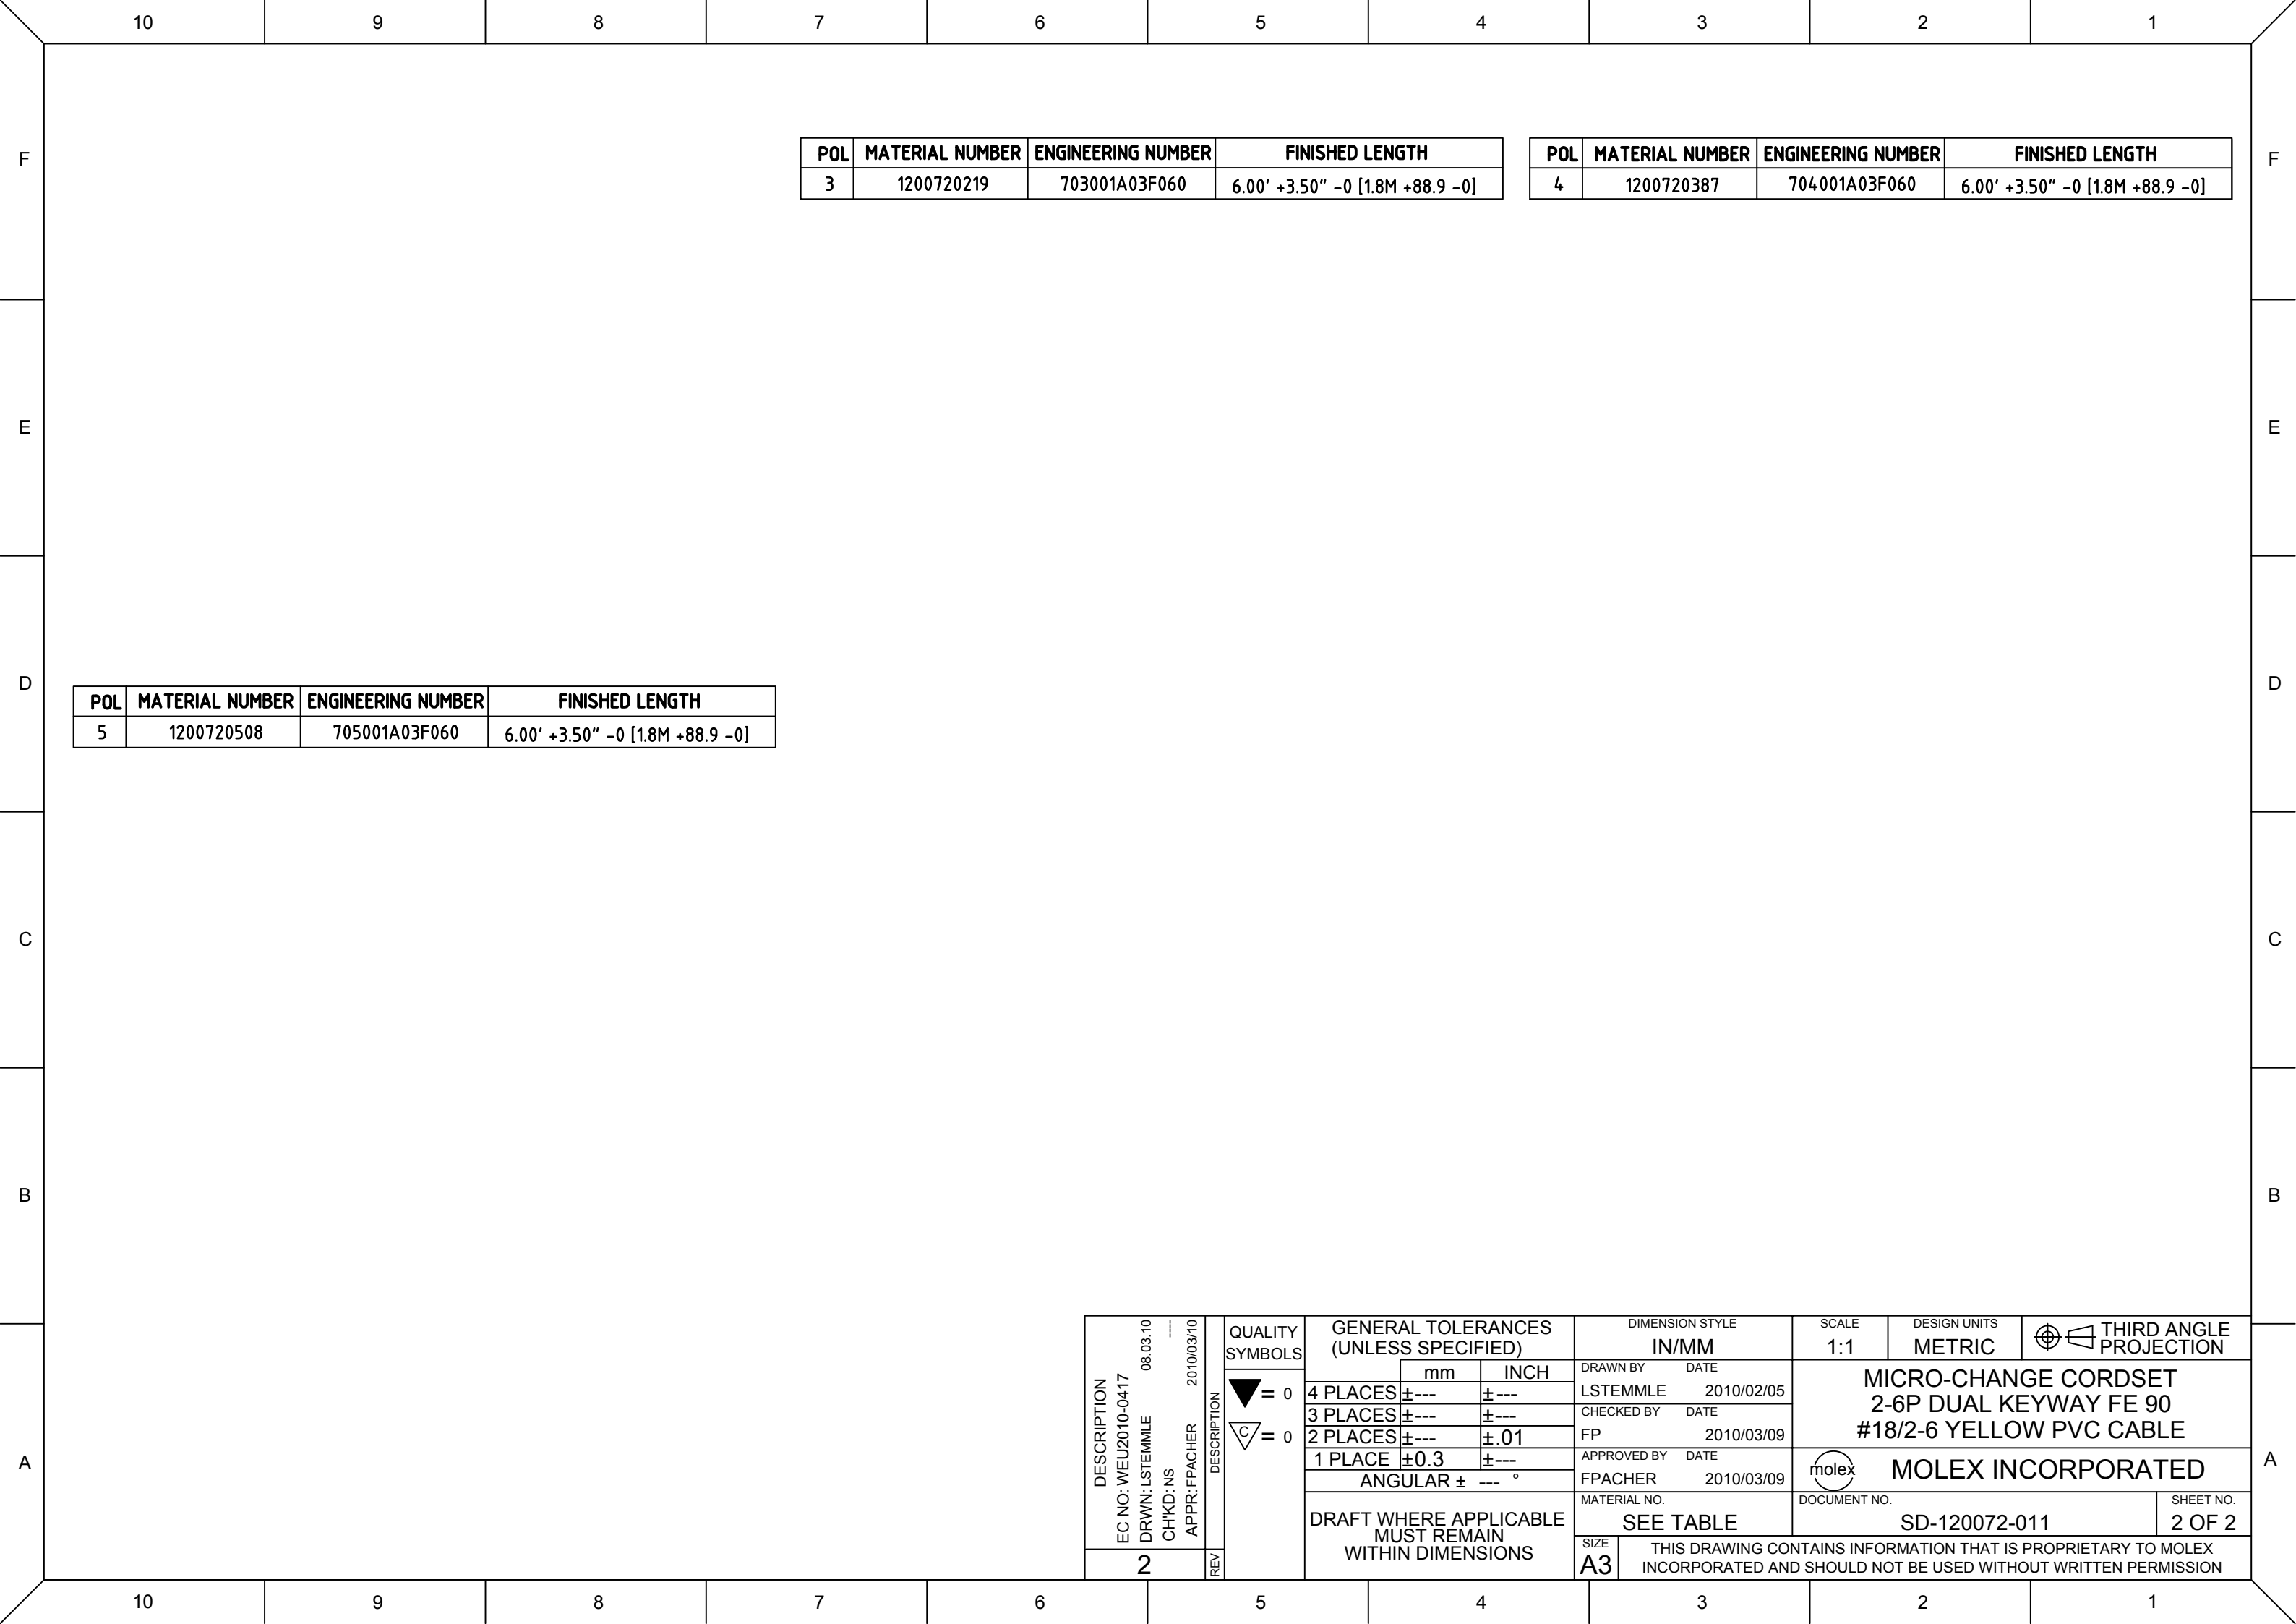

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200720219	703001A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200720387	704001A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200720508	705001A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

DESCRIPTION EC NO: WEU2010-0417 08.03.10 DRWN: LSTEMMLE CH'KD: NS APPR: FPACHER 2010/03/10	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/05	MICRO-CHANGE CORDSET 2-6P DUAL KEYWAY FE 90 #18/2-6 YELLOW PVC CABLE			
		4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/03/09				
		3 PLACES	±---	±---	APPROVED BY FPACHER		MOLEX INCORPORATED			
		2 PLACES	±---	±.01						
		1 PLACE	±0.3	±---	MATERIAL NO. SEE TABLE		SD-120072-011			
		ANGULAR ± --- °								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SHEET NO. 2 OF 2					
2	REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				