
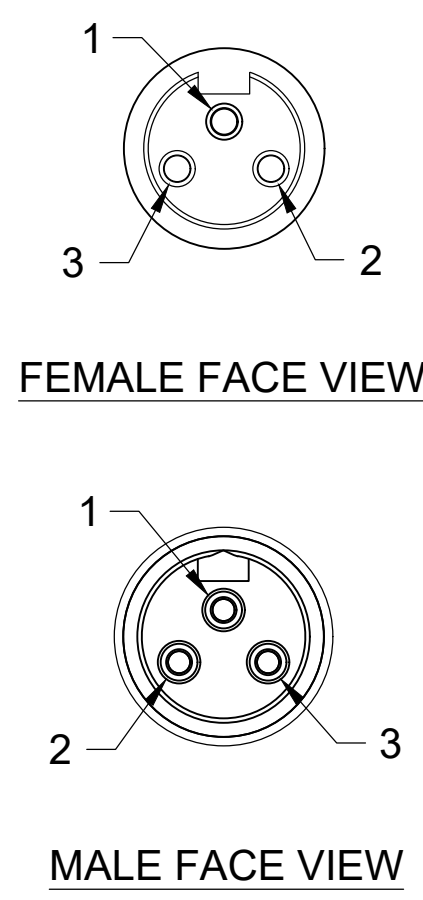
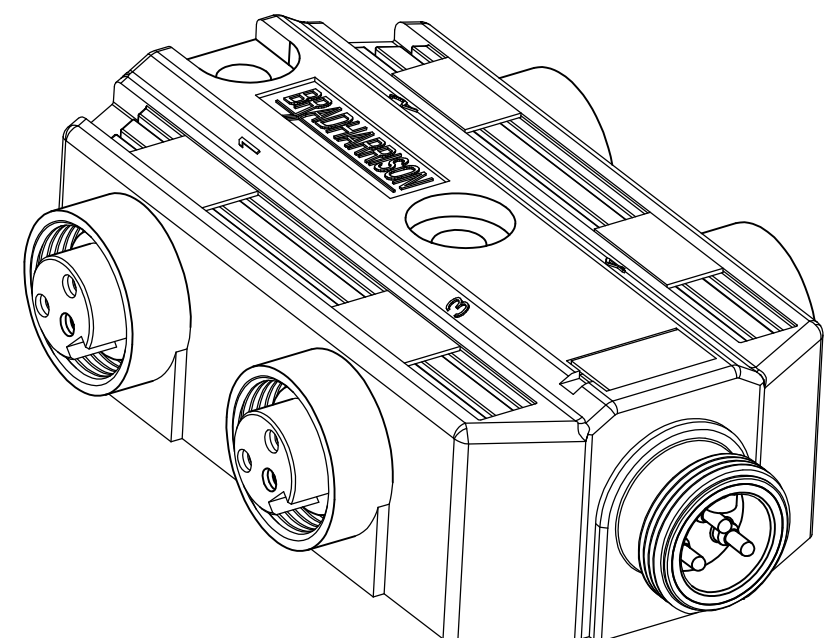
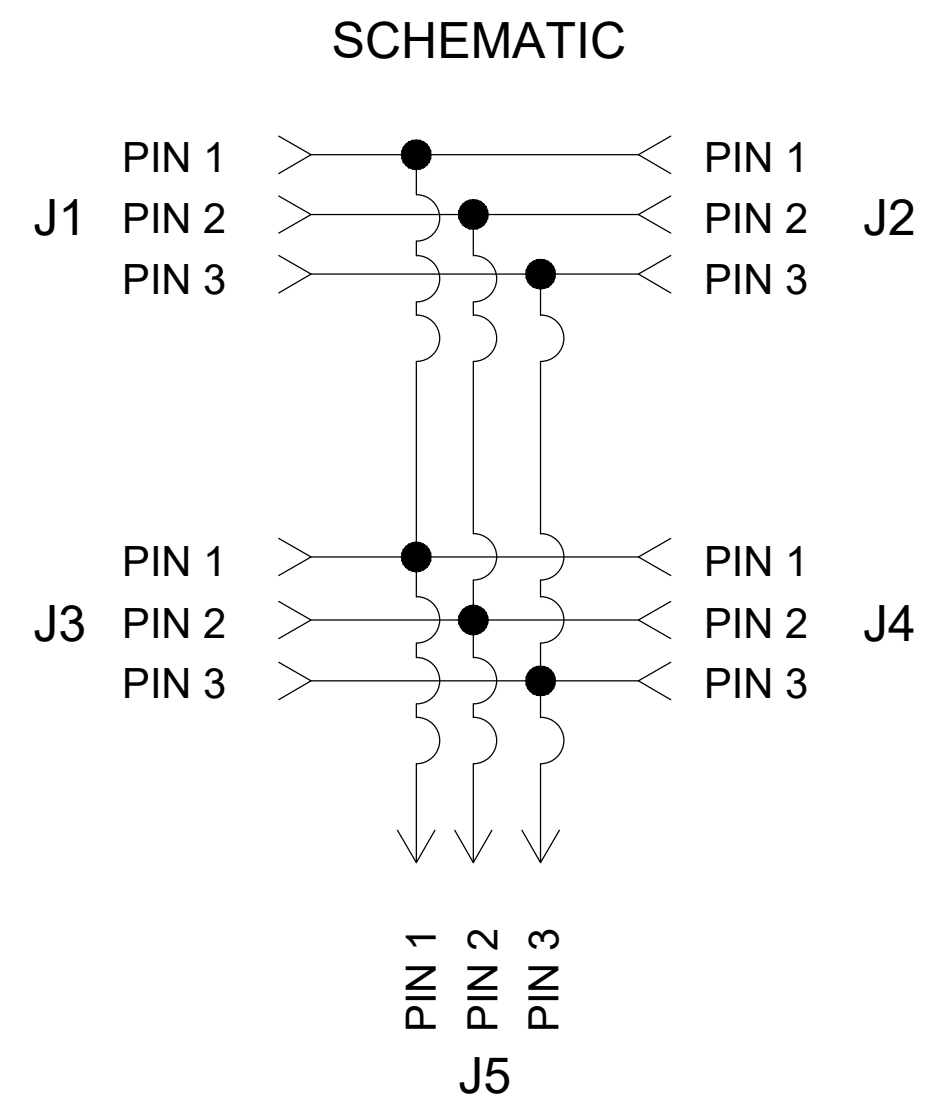


MATERIAL NUMBER	ENGINEERING NUMBER
1300600067	ACAUX4000

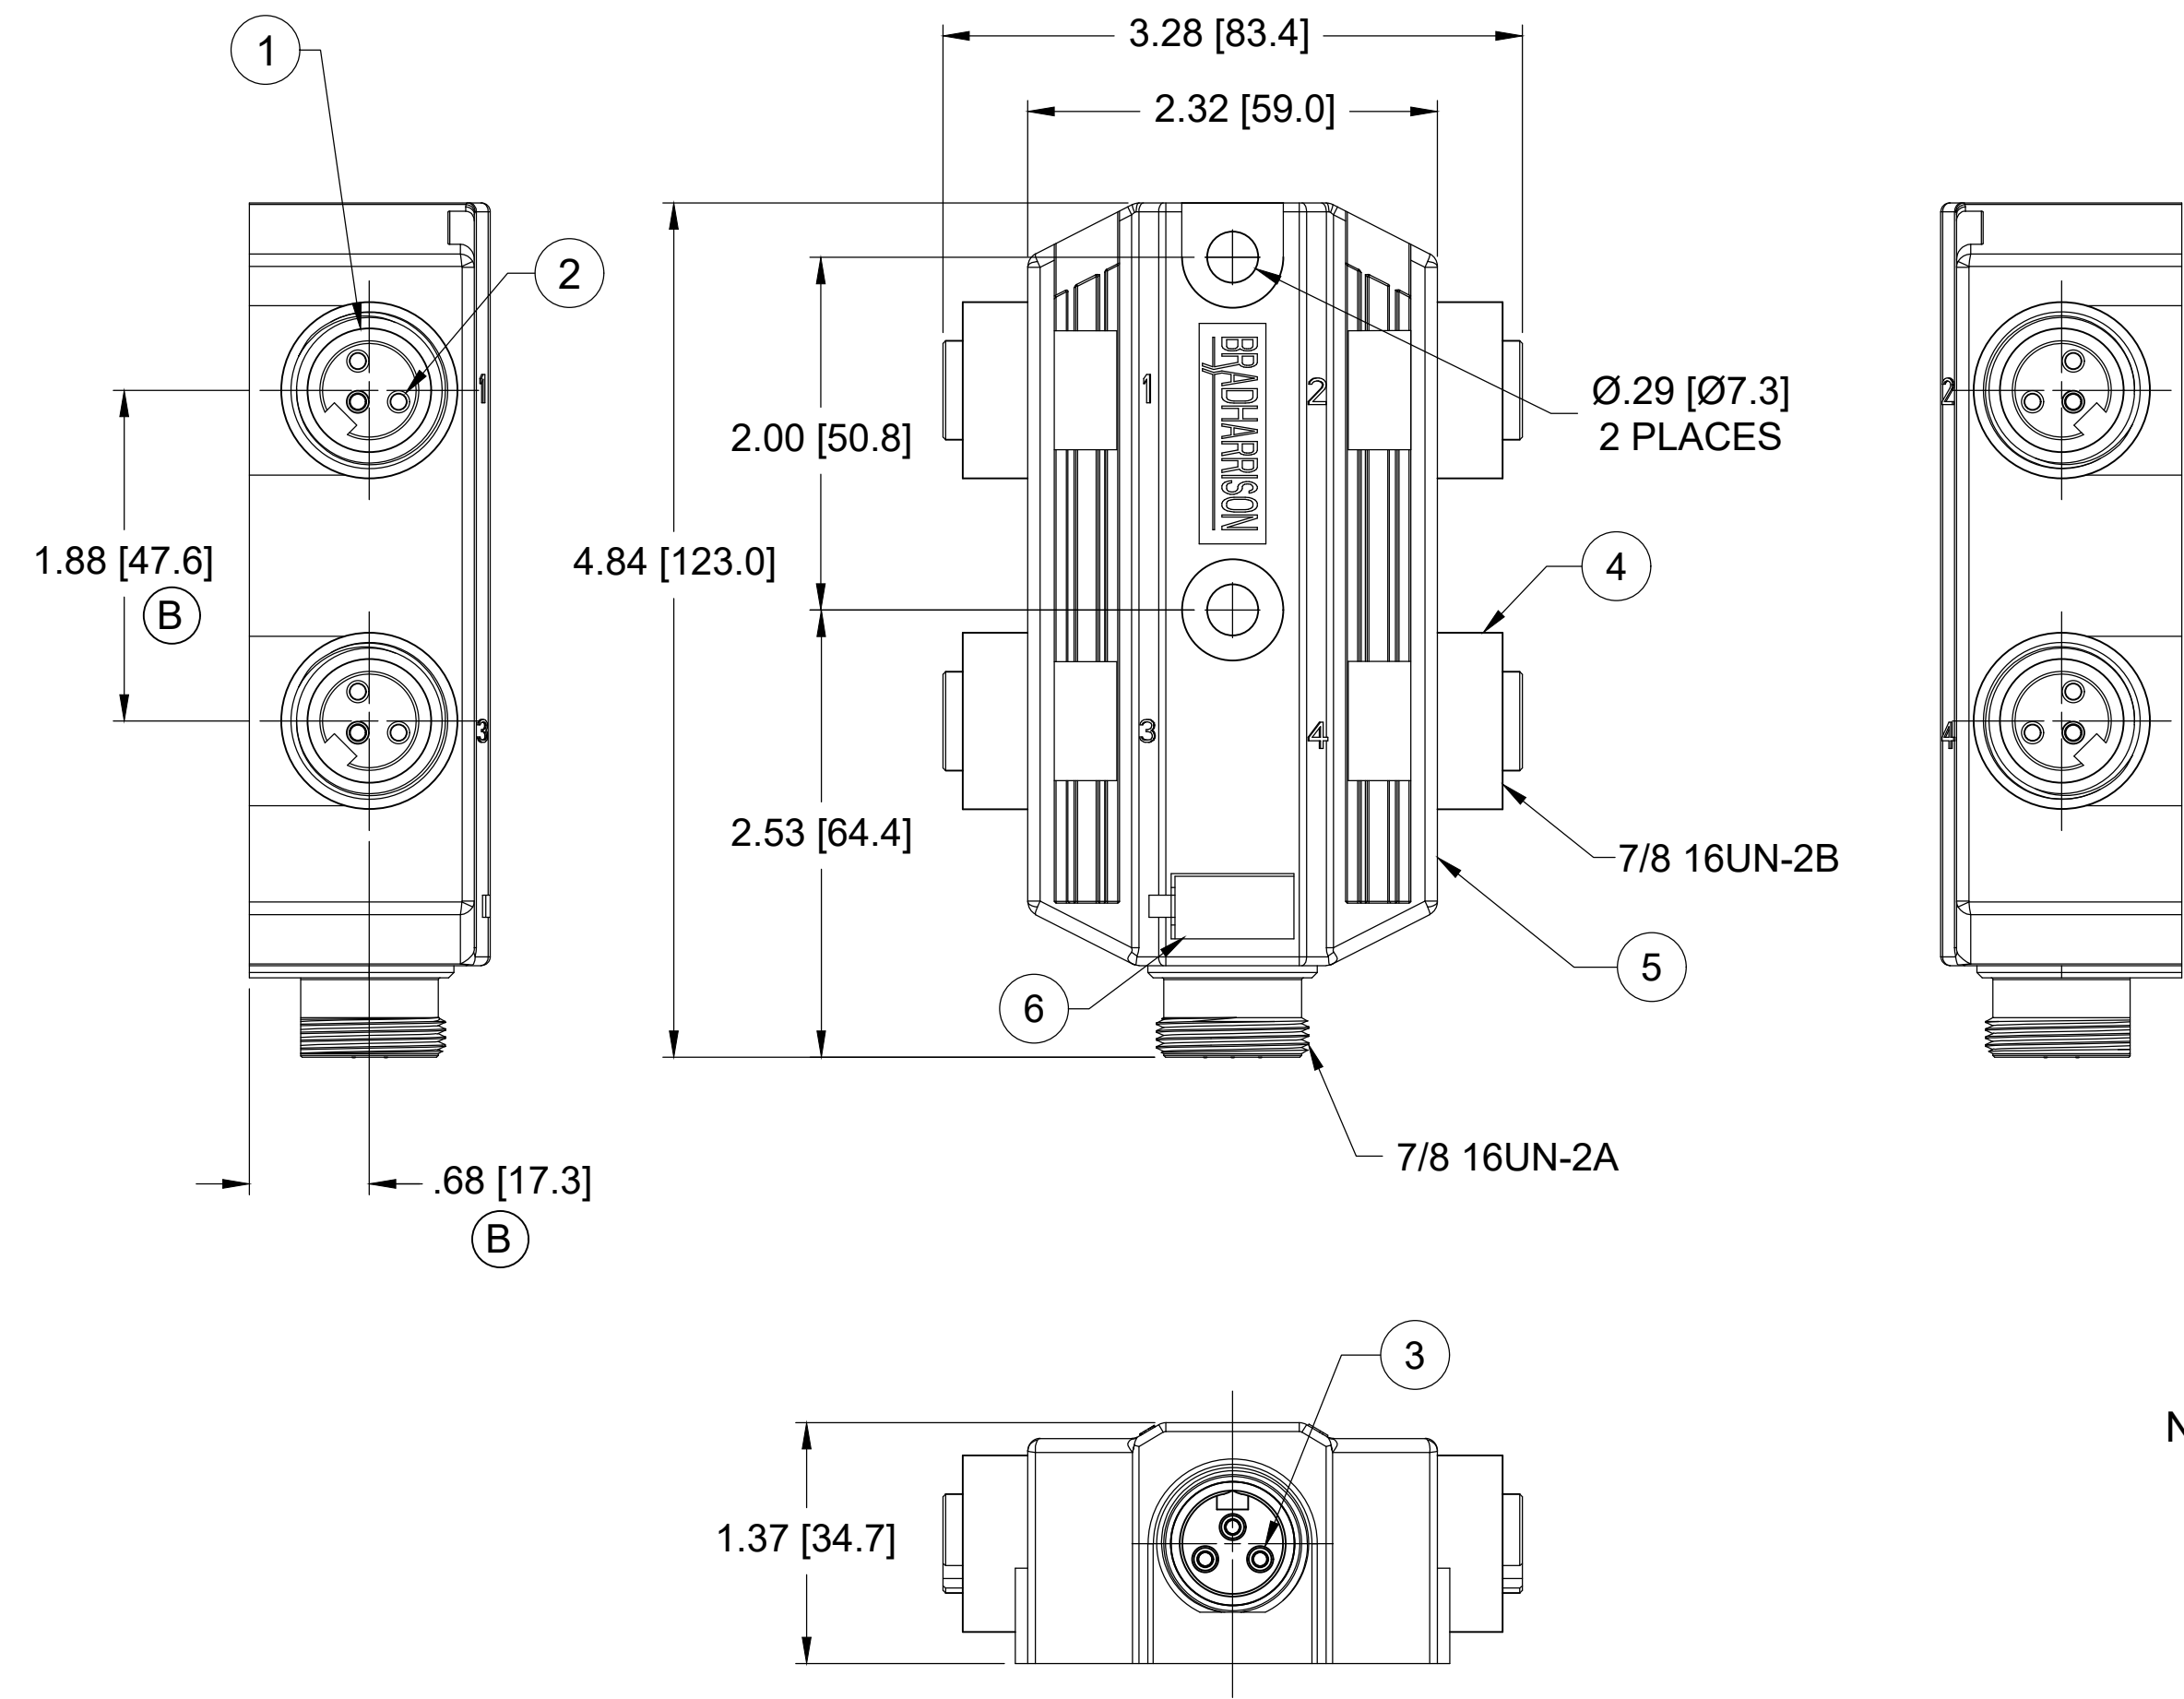

- NOTES:
- MATERIAL: AS NOTED
 - FINISH: AS NOTED
 - ELECTRICAL:
VOLTAGE RATING: 600 VAC/VDC
CURRENT: 13A
 - TEMP RATING: 0° TO +60°C
 - PROTECTION: IP67 (WHEN MATED)
 - COUPLING THREAD- AS NOTED
 - UL LISTED FILE: E152210
 - ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERANCED OR NOTED OTHERWISE

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	TPE	YELLOW
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	RECEPTACLE SHELL	ZINC DIE CAST	BLACK E-COATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
	POTTING MATERIAL	EPOXY	TRANSLUCENT

FUNCTIONAL SYMBOLS FA=0 FC=0 FP=0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
	DIMENSION UNITS INCH/MM		SCALE NTS		CURRENT REV DESC: ITEM# 1 WAS PVC. UPDATED LATEST MOLEX TEMPLATE. ADDED DIMS. EC NO: 645633 DRWN: ABENJAMINLW 2020/09/07 CHK'D: RSTONE 2020/09/30 APPR: BWOODMAN 2020/10/23 INITIAL REVISION: DRWN: KJOZWIK 2010/01/25 APPR: JFMURPHY 2010/01/29 ANGULAR TOL ± 0.5 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						DRAWING C-SIZE		SERIES 130060		DOCUMENT NUMBER SD-130060-012		DOC TYPE/DOC PART/REVISION PSD 001 B	
	GENERAL TOLERANCES (UNLESS SPECIFIED)				MATERIAL NUMBER SEE CHART		CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1									
	mm		INCH															
4 PLACES ±----		±----																
3 PLACES ±----		±0.005																
2 PLACES ±0.13		±0.01																
1 PLACE ±0.25		±0.02																
0 PLACES ±----		±----																