



1		2		3		4		5		6	
THIS DRAWING IS PROPERTY OF ORIENT DISPLAY. ALL RIGHTS RESERVED.		ITEM	PARAMETERS	ITEM	PARAMETERS	ITEM	PARAMETERS	ITEM	PARAMETERS		
		DISPLAY TYPE	TN, POSITIVE	VIEWING DIRECTION	6.0 'CLOCK	LCD OPERATING VOLTAGE	5.0V	IC	--		
		DRIVING METHOD	STATIC	OPERATION TEMPERATURE	-20°C TO 70°C	LOGIC VOLTAGE(VDD)	--	BACKLIGHT	/		
		POLARIZER TYPE	TRANSFLECTIVE	STORAGE TEMPERATURE	-30°C TO 80°C	SURFACE LUMINANCE	--	CONNECTOR	PIN		


PIN	1	2	3	4	5	6	7	8	9	10	11	12
COM	COM	E1	D1	C1	DP1	E2	D2	C2	DP2	E3	D3	C3

PIN	13	14	15	16	17	18	19	20	21	22	23	24
COM	B3	A3	F3	G3	B2	A2	F2	G2	B1	A1	F1	G1

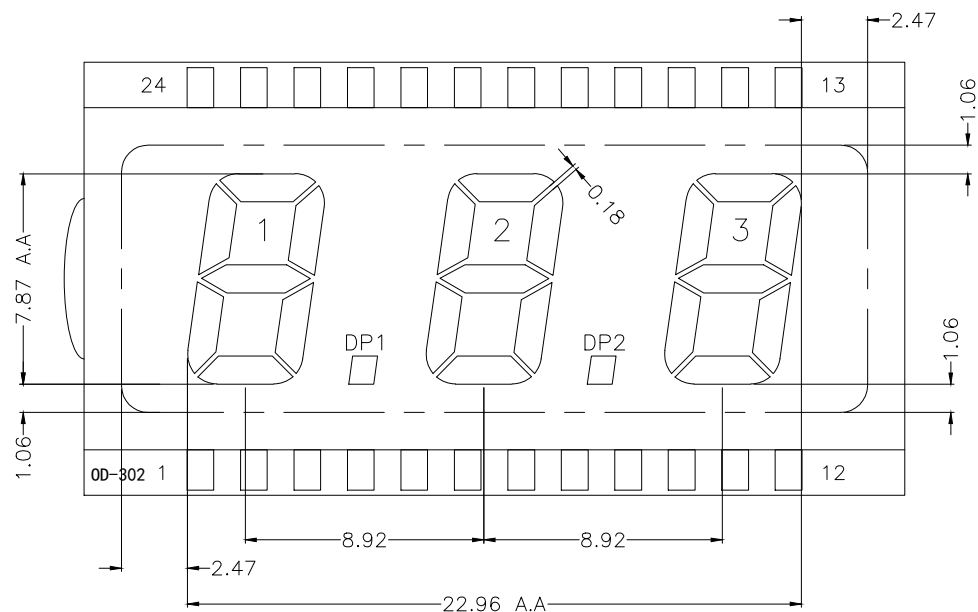


TITLE	LCD	PART NO.	OD-302
REV.	1	CUSTOMER NO.	OD-302
SCALE	FIT	UNIT	mm
ROHS/REACH COMPLIANT	YES	3rd ANGLE	3rd ANGLE
UNMARKED TOLERANCE	±0.2	CUSTOMER'S APPROVAL	

SHEET 2 of 3

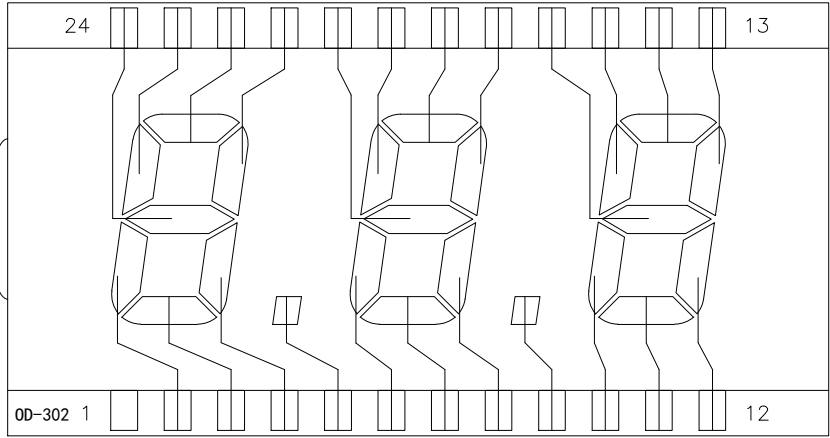

SEG

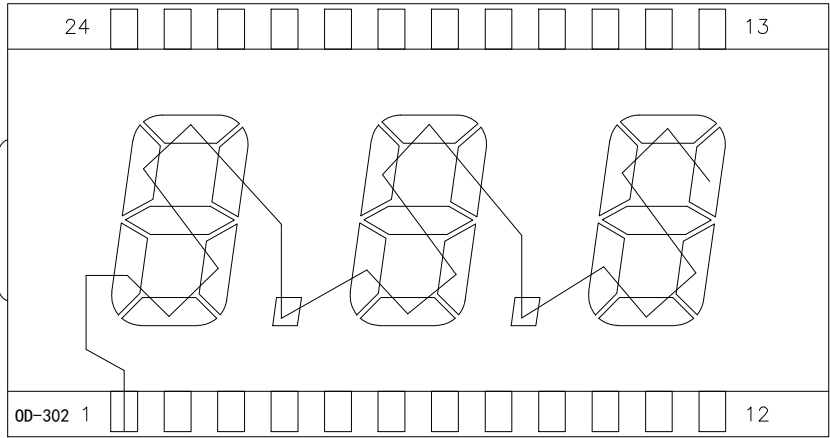

COM



TITLE	LCD	PART NO.	OD-302		
REV.	1	CUSTOMER NO.	OD-302		
SCALE	FIT	UNIT	mm	3rd ANGLE	 SHEET 3 of 3
ROHS/REACH COMPLIANT		YES	CUSTOMER'S APPROVAL		
UNMARKED TOLERANCE		±0.2			