MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 81929

SWITCH – BASIC

CATALOG LISTING
V3-1113
CK-M1350

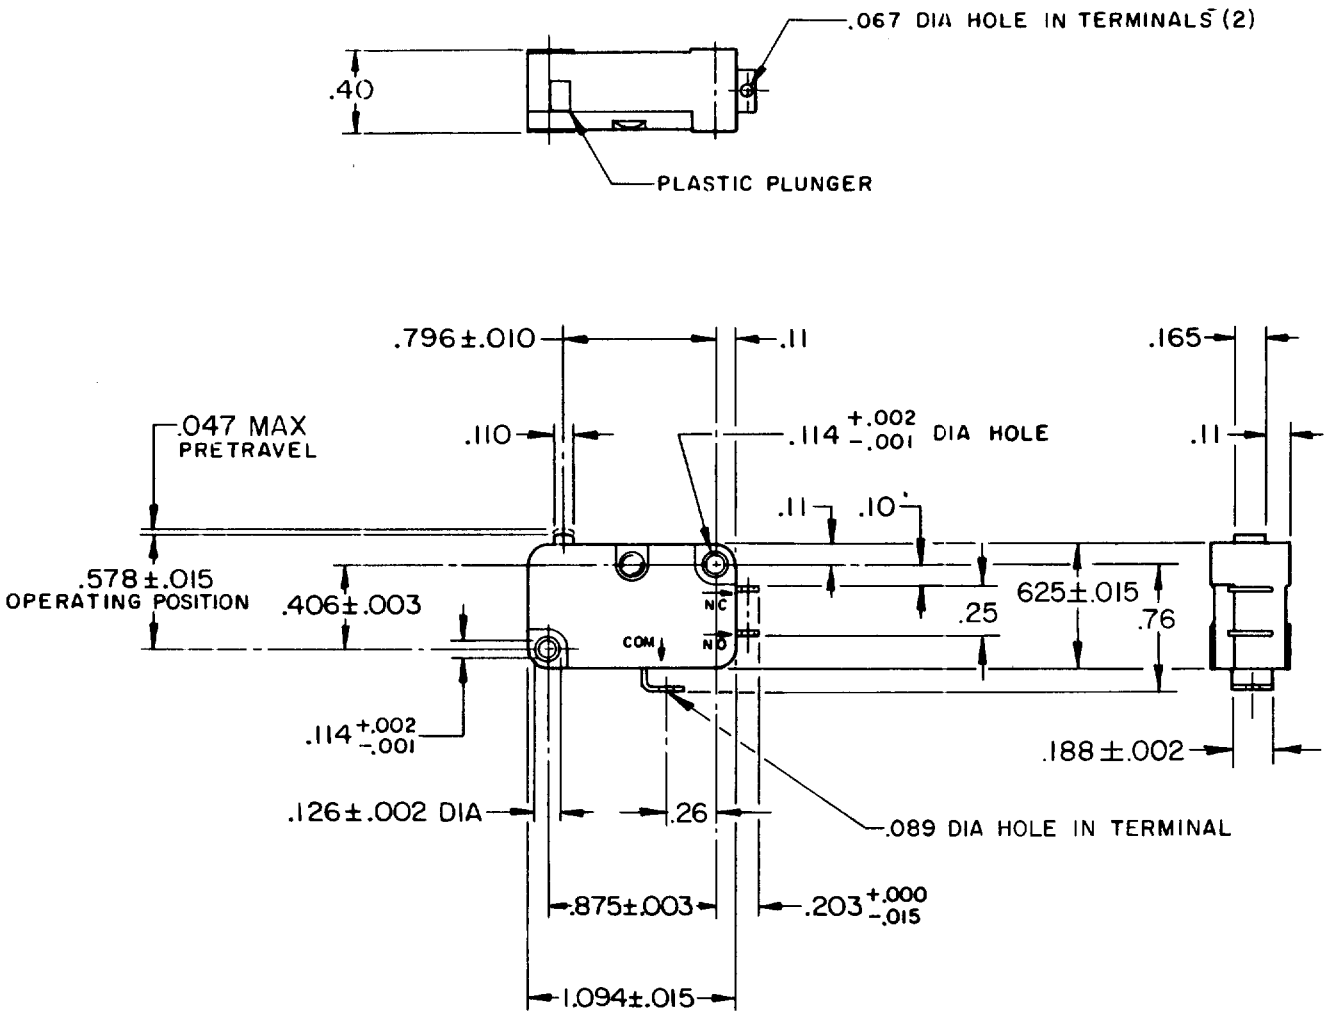

NOTE–
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — — 75 GRAMS MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE TRAVEL — — — — — — — .010 MIN		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
RELEASE FORCE — — — — 10 GRAMS MIN	L112 10A 1/3HP 125 OR 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"	**TOLERANCES ARE**
DIFFERENTIAL TRAVEL — — — .002–.010		ONE PLACE (.0) ±.030
OVERTRAVEL — — — — — — .050 MIN		TWO PLACE (.00) ±.015
FREE POSITION — — — — — — .625 MAX		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT

V3-1113 | M | DRAWING NUMBER | ISSUE X 4 | RELEASE NO. PR-4024 | REPLACES X61345-V3

REVISIONS
A C039182 CEB 10 FEB 78
B C074635 KDR 10 MAY 93
C CO 77796 DCS 24 MAR 94

CHECK | CHECK | 21 MAR '74 | CHECK LSD | 74 | MAR | 20 | W | B | D | DRAWN

FO-52848