

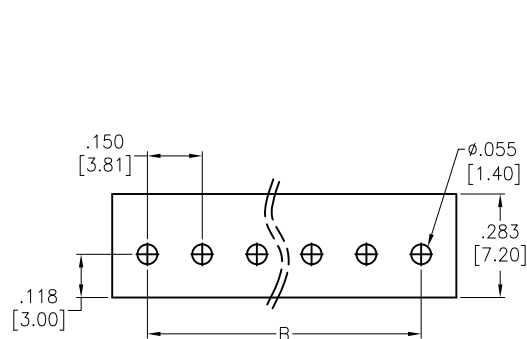



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/14	
A		REVISED SPEC.	6/4/14	HR/VY
B		UPDATE DRAWING	1/9/18	AY/KC
C		UPDATE DRAWING	10/20/20	LH/EY

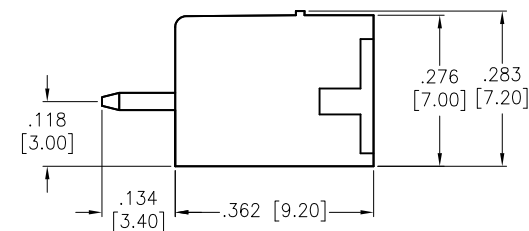

RECOMMENDED PCB LAYOUT

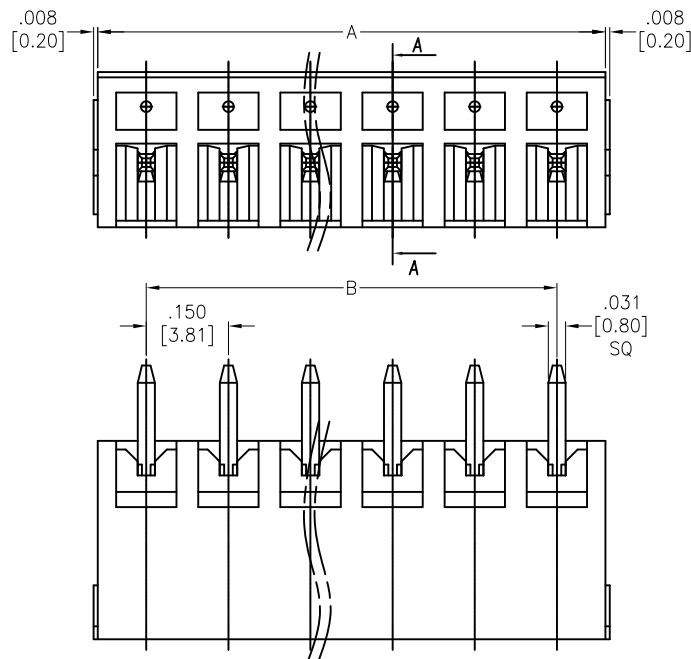

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300 VAC

Current rating: 8 Amp

Dielectric withstanding voltage: 1,600 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .150 [3.81] x No. of Spaces + .181 [4.60]

B= .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS					TITLE	
DRAWN		HR	5/5/14		TERMINAL BLOCK, STRAIGHT, .150" [3.81] PITCH	
CHECKED		SY	5/5/14			
APPROVED						
SIZE X		PART NO. EBRA-XX-B		REV. C		
REF: S00067C		SCALE: NTS		SHEET 1 OF 1		