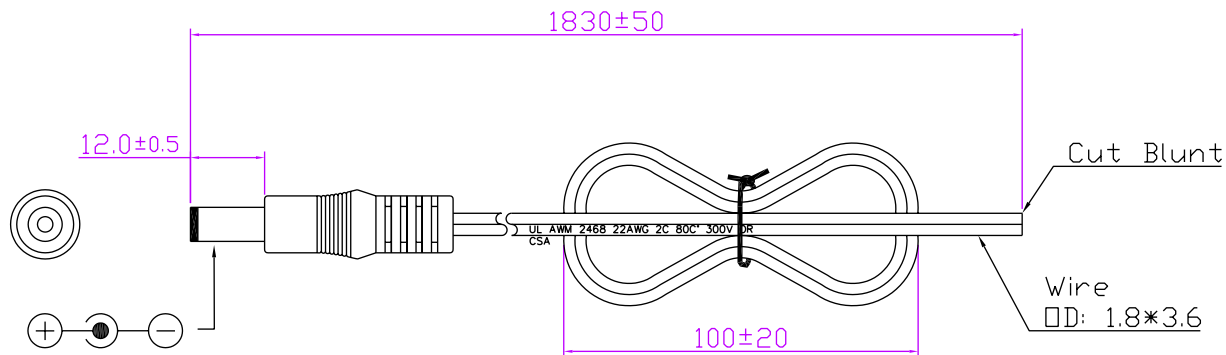


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/16/93	BS
B	REDRAW, 105°C TO 80°C, SPT-1 TO #2468, RFS.2857, DMR	01/21/04	BS


GENERAL SPECIFICATIONS:

VOLTAGE: 300 V
 TEMPERATURE: 80°C
 CABLE TYPE / SIZE: UL 2468, 22 AWG X 2 C
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 1830 ± 50 mm (6 Ft)


END 'A' TERMINATION: STANDARD FEMALE BARREL 5.5 x 2.5 x 12 mm
 END 'B' TERMINATION: CUT BLUNT
 APPROVALS CABLE: UL AND/OR CSA
 APPROVALS CONNECTOR: N/A

PACKING:

HANKED PER DRAWING

NOTES:

1. CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
REV.	A			
SHEET	1			
INIT.BY: DMR		DATE: 01/21/04	GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 www.globtek.com	
DRAWN: NF		DATE: 01/21/04		
APRVD: DMR		DATE: 01/21/04	PART NO: L001766F6000	
			SHEET 1/1	

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

TOLERANCES:
 DECIMALS ANGULAR
 .xx +/- 0.1 +/- 1°
 .xxx +/- .005
 MILLIMETERS ANGULAR
 .xx +/- 0.3 +/- 1°
 .xxx +/- .013

DWG TITLE: OUTPUT CABLE ASSEMBLY W/O STRAIN RELIEF

REV.
B