

6

5

4

3





2

1



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/2/21	

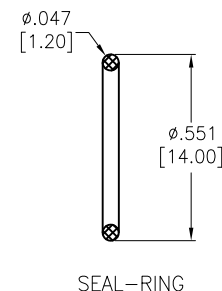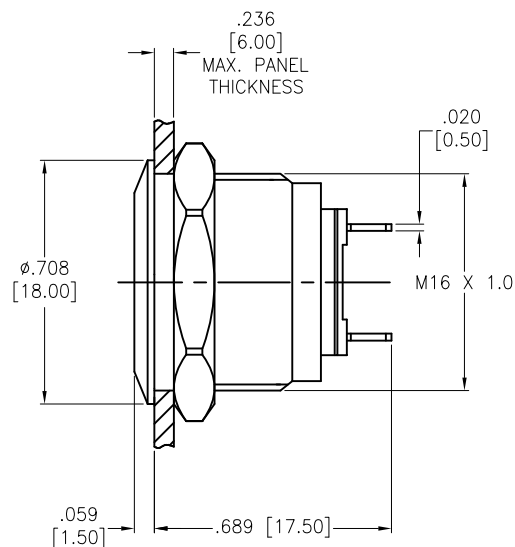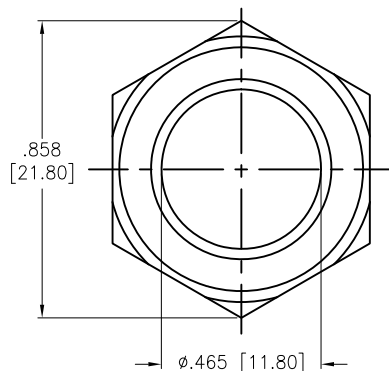

SEAL-RING

RECOMMENDED
PANEL CUT-OUTCIRCUIT DIAGRAM
(SPST) OFF-MOM

SPECIFICATIONS:

Material:

Bushing&Button: Stainless steel, Varnish polished

Base: PA

Contact Material: Silver Alloy, (2.0x0.5mm)

Electrical:

Switch Rating: 0.5A @ 220V AC

Contact resistance: 50 mΩ max initial.

Insulation resistance: 1000M ohms min.

Dielectric withstanding voltage: 1,500V, RMS 50Hz, 1min

Electrical Life: 50,000 cycles min.

Mechanical:

Operating Force: 4N

Nut Torque: 0.6Nm max.

Temperature Rating:

Operating temperature: -25°C to +55°C

Environmental:

IP65 Front Panel Protection

Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	WX	11/2/21
CHECKED	RC	11/2/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH
ADAM
TECH

 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

 TITLE SWITCH, ANTI-VANDAL, PUSH BUTTON, SPST,
 OFF-MOM, 16mm, FLAT BUTTON, MOMENTARY

SIZE X	PART NO. SW-PB7-01B32BFM	REV. -
REF: S00198T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1