

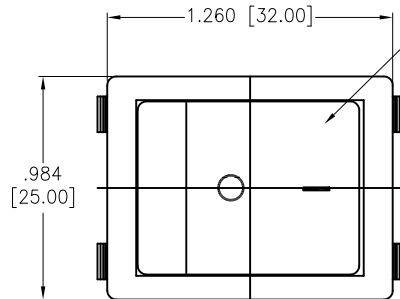
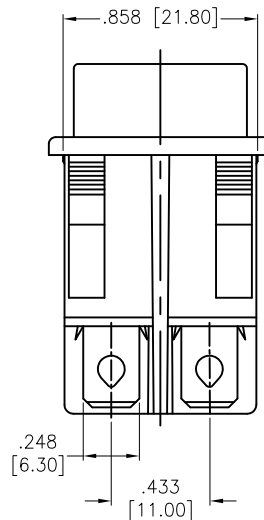
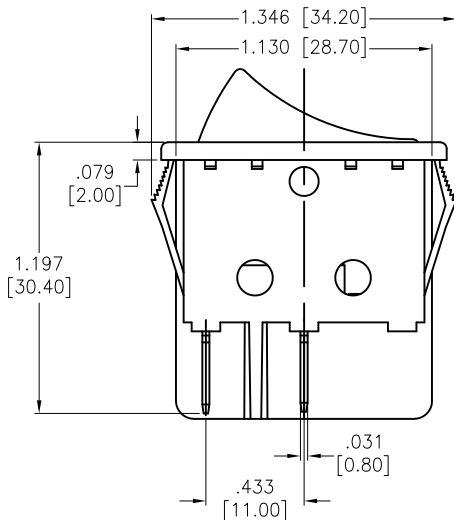



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/2/21	



SOLID COLOR WITH
WHITE MARKINGS
(See Chart)



A=ON-OFF
C=OFF-(ON)
SW-R1-3X-E-XX-2

	Actuator Color
BLANK	Standard Black
W	White
R	Red
G	Green
Y	Yellow (Amber)
B	Blue
O	Orange

	Actuator Markings
1	
2	
3	
4	
5	

SPECIFICATIONS:

Body: Nylon 66, Color Black, Rated UL 94V-0

Terminal: Brass, Silver plated

Button: Nylon 66, Solid color, White color markings. (See Chart)

Electrical:

The rated load: 250V AC, 16 A

125V AC, 20 A

Contact resistance: 50 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 1500 VAC/5S min

Mechanical:

Electrical life: 10000 Cycles min

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Replace "x" in P/N with the corresponding switch color and marking

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
				TITLE SWITCH, MEDIUM ROCKER, DPST, ON-OFF, (OFF)-ON, QC .250 [6.35MM]	
APPROVALS		DATE		SIZE	PART NO.
DRAWN	WX	9/2/21		X	SW-R1-3X-E-XX-2
CHECKED	RC	9/2/21		REV.	-
APPROVED				REF:	S00206C
				SCALE:	NTS
				SHEET 1 OF 1	