

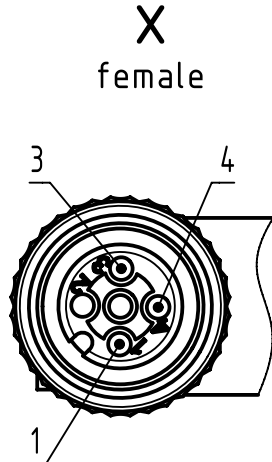


Connector Location A

Connector Location B

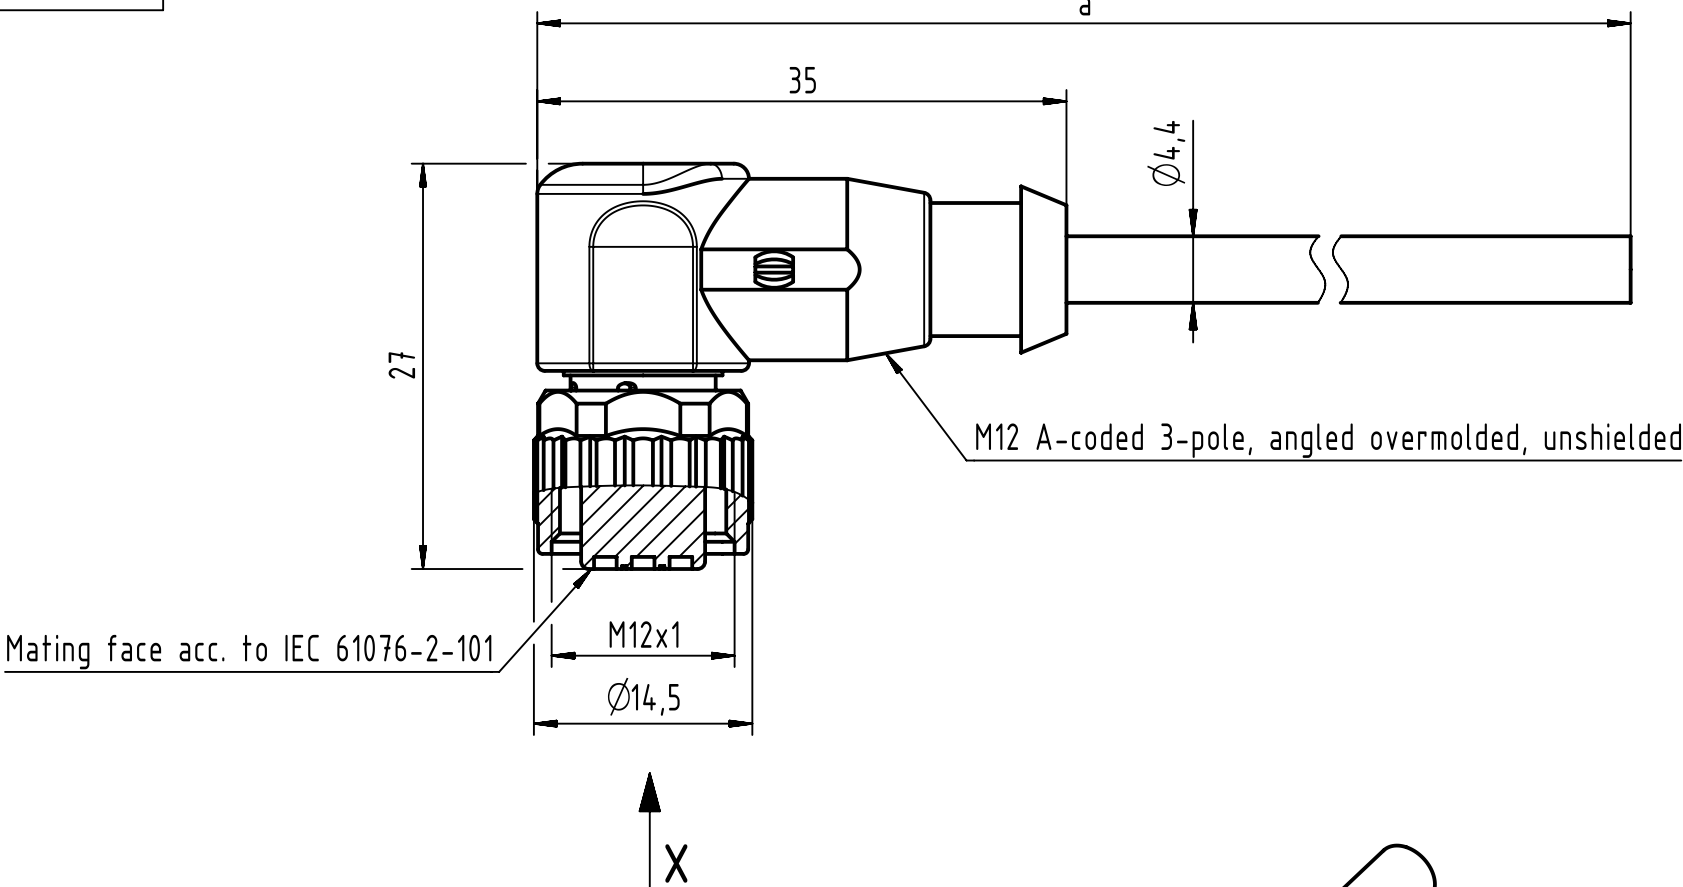

- Loading-Plan:
- 1 brown
 - 3 blue
 - 4 black

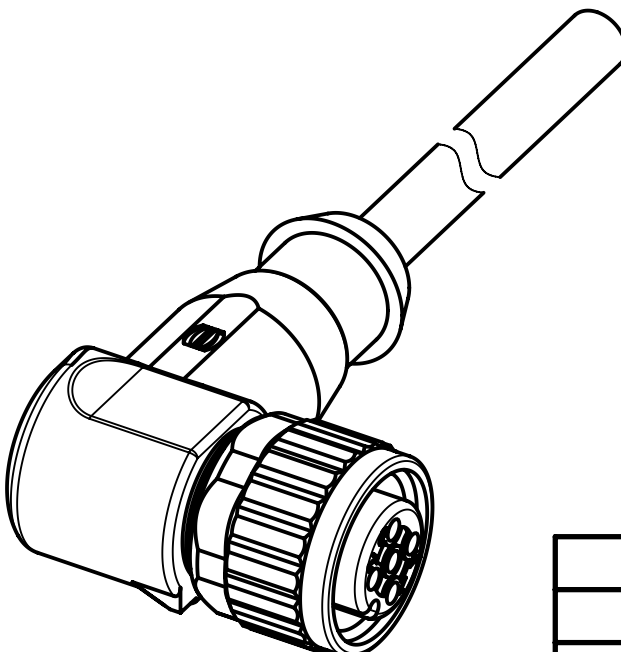

- Protection level: IP67
- Temperature range: -25°C ... +80°C

4.0 to 40	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	40	XXX=40
	39	XXX=39
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

PVC grey, 3x0.34mm ²	21348700383XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by COSTEA Costea	Inspected by MUNTEANV Muntean	Standardisation MUNTEANV Muntean	Date 2019-01-11	State Final Release	
	Department HCS - RO	Title M12 Cable Assembly A-cod an/- f/-				Doc-Key / ECM-Nr. 100578809/UGD/009/C 500000145017	
	HARTING Customised Solutions D-32339 Espelkamp	Type TB	Number 21348700383XXX			Rev. C	Page 1/1