


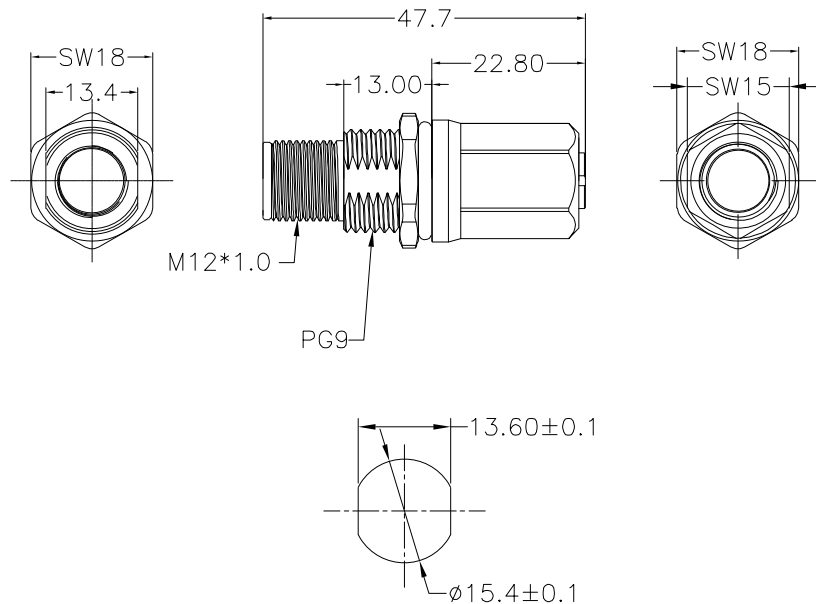

RECOMMENDED PANEL CUT-OUT

MALE

A04	A05	A08	D04	B05

FEMALE

A04	A05	A08	D04	B05

NOTE:

MATERIAL

M12 INSULATOR	PA66, UL94V-0, BLACK
SHELL	NICKEL PLATED BRASS
CONTACT	GOLD FLASH PLATED BRASS
NUT	NICKEL PLATED BRASS
O-RING	FKM, GREEN

ELECTRICAL

RATED CURRENT	2A(8P) / 4A(4/5P)
VOLTAGE	30V(8P) / 60V(5P) / 250V(4P)
INSULATOR RESISTANCE	100 MOhms MIN.
CONTACT RESISTANCE	10 mOhms MAX.
MATING CYCLES	100 CYCLES MIN

ENVIRONMENT

OPERATION TEMPERATURE	-40°C TO +85°C
IP RATING	IP67 (UNCOUPLED & COUPLED)

RECOMMENDED TORQUE

0.4Nm TO 0.8Nm

SERIES S58-YYY-MFR001

S58 = M12 STRAIGHT ADAPTER

CONTACT ARRANGEMENT YYY

A04 = (2X) 4P A-CODE

A05 = (2X) 5P A-CODE

A08 = (2X) 8P A-CODE

D04 = (2X) 4P D-CODE

B05 = (2X) 5P B-CODE

GENDER MFR001

MF = MALE / FEMALE

CONTACT PLATING 1

1 = GOLD FLASH

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/20/2021

TOLERANCES

.x ±0.5

.xx ±0.2

ANGULAR ±1°

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

1

DWG NO.

S58-YYY-MFR001