
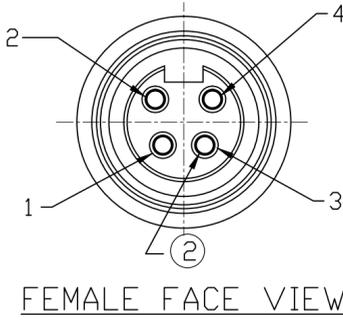
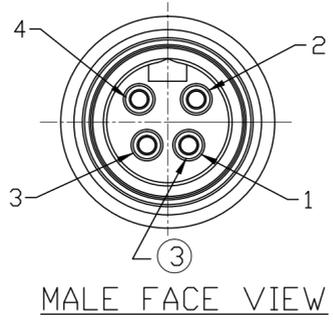
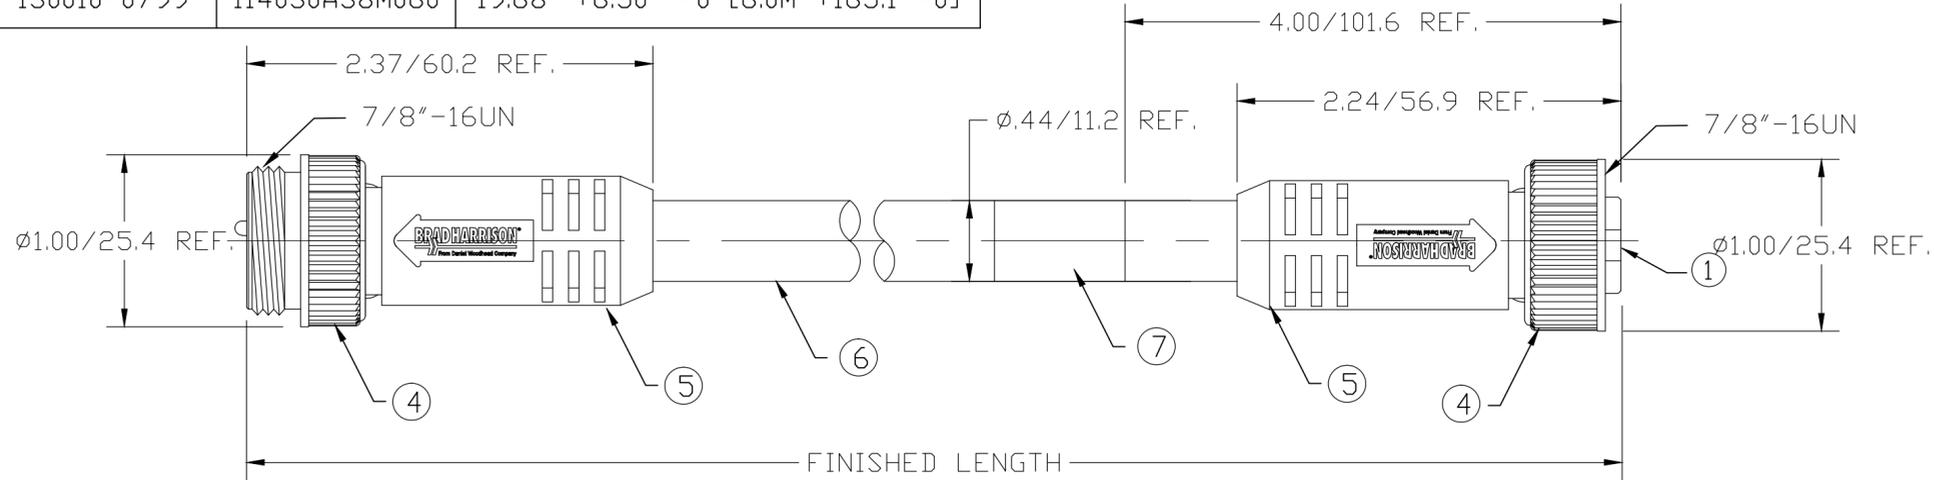


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
130010-0793	114030A38M005	1.64' +1.75" -0 [1.5M +44.5 -0]
130010-0794	114030A38M010	3.28' +2.19" -0 [1.0M +55.6 -0]
130010-0795	114030A38M020	6.56' +3.50" -0 [2.0M +88.9 -0]
130010-0796	114030A38M030	9.84' +3.50" -0 [3.0M +88.9 -0]
130010-0797	114030A38M040	13.12' +6.50" -0 [4.0M +165.1 -0]
130010-0798	114030A38M050	16.40' +6.50" -0 [5.0M +165.1 -0]
130010-0799	114030A38M060	19.68' +6.50" -0 [6.0M +165.1 -0]

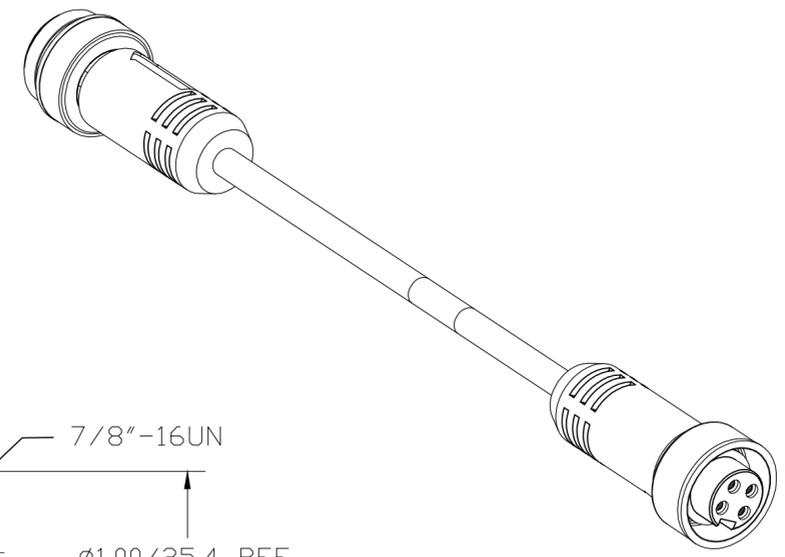

4	BLACK	4
3	BLUE	3
1	BROWN	1
2	WHITE	2

(B) WIRING DIAGRAM

(B) REF. CENELEC PINOUT PER EN 50-044

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PVC	YELLOW
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	COUPLING NUT	ZINC DIE CAST	BLACK E-COATED
5	OVERMOLD	PVC	YELLOW
6	CABLE- 16AWG, (65 X #34 COPPER STRANDING), 4 CONDUCTOR, 600V, ST00W/ST	PVC	YELLOW
7	LABEL	VINYL	BLACK/YELLOW

VOLTAGE RATING	600 VAC/VDC
AMPERAGE RATING	10 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

EC NO: IFC2016-0359 DRWN: RSTONE 9/2/15 CHKD: B ARDEN 2015/09/04 APPR: KJOZWIK 2010/01/14	QUALITY SYMBOL ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±.020	DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
	DRAWN BY DATE TW 2010/01/08	CHECKED BY DATE JFMURPHY 2010/01/14	MATERIAL NO. 123450001	DOCUMENT NO. SD-130010-013	SHEET NO. 1 OF 1	MINI-CHANGE CORDSET 4 POLE MALE/FEMALE PVC CABLE CENELEC PINOUT MOLEX INCORPORATED	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
	SIZE C						