

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	TAB SIZE	WIRE RANGE AWG (mm ²)	COLOR	MAX. INSUL.	MIN. INSUL.	DIMENSIONS in.[mm]			TOOL CHART RECOMMENDED PRESSES: CP-861, CP-862, CP-871 CA-800EZ/CA9 APPLICATOR DIE INSERTS
						L ± .03 [0,76]	H ± .02 [0,51]	W ± .02 [0,51]	
DPF18-250FIMB	.250 x .032 [6,3 x 0,8]	22-18 [0,5-1,0]	RED	.13 [3,3]	.06 [1,5]	.92 [23,4]	.34 [8,6]	.46 [11,7]	CD-800-10 CD9-10B
DPF14-250FIMB	.250 x .032 [6,3 x 0,8]	16-14 [1,5-2,5]	BLUE	.16 [4,1]	.09 [2,3]	.92 [23,4]	.34 [8,6]	.46 [11,7]	CD-800-11 CD9-11B

NOTES:

1. USED FOR:

- A. 600V MAX VOLTAGE RATING
B. TEMPERATURE RATING OF INSULATION:
221°F [105°C]
C. STRANDED COPPER WIRE ONLY


2. WIRE STRIP LENGTH: $9/32^{+1/32}_{-0}$ (7,1 $^{+8}_{-0}$)

3. MATERIAL:

- A. STAMPING: NICKLE PLATED BRASS
B. HOUSING: PREMIUM GRADE NYLON FOR
SUPERIOR STRAIN RELIEF INSULATION
CRIMPING

4. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX


5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

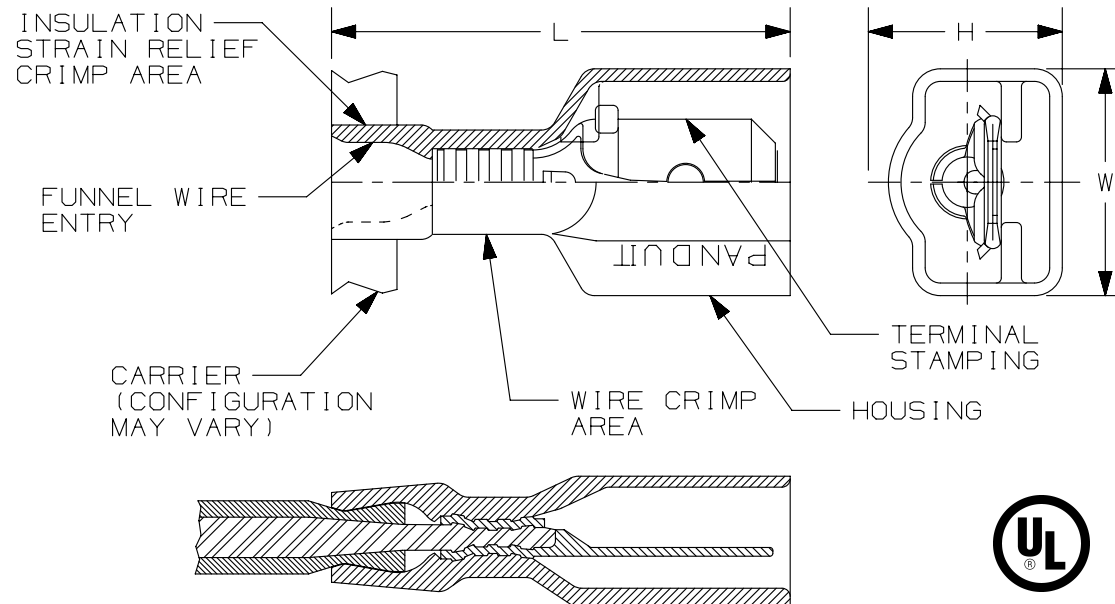

SECTION VIEW OF CRIMPED DISCONNECT



LISTED
20H3
E78522

										TITLE DISCOGRIP™ MALE DISCONNECTS, FULLY INSULATED NYLON #22-14 CUSTOMER DRAWING			
										ITEM REVISION NAME N41513BA/05		PANDUIT	
										DATASET FILE NAME N41513BA_DC/05A			
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [25.4] .xxx ± .005 [.13] .xx ± .01 [25.4] ANGLES ± 5° THIRD ANGLE PROJECTION			
05	09.06.12	JBN	LCA	VMB	WIRE RANGE FOR PARTS DNF18-250FIMB WAS 0.5-1.5 REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARD.	A41513					MATERIAL: SEE NOTES		
											DRAWING NUMBER: A41513		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY KC	DATE -	CHK -	SCALE N.T.S.	SHEET 1 OF 1	SIZE A	