



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

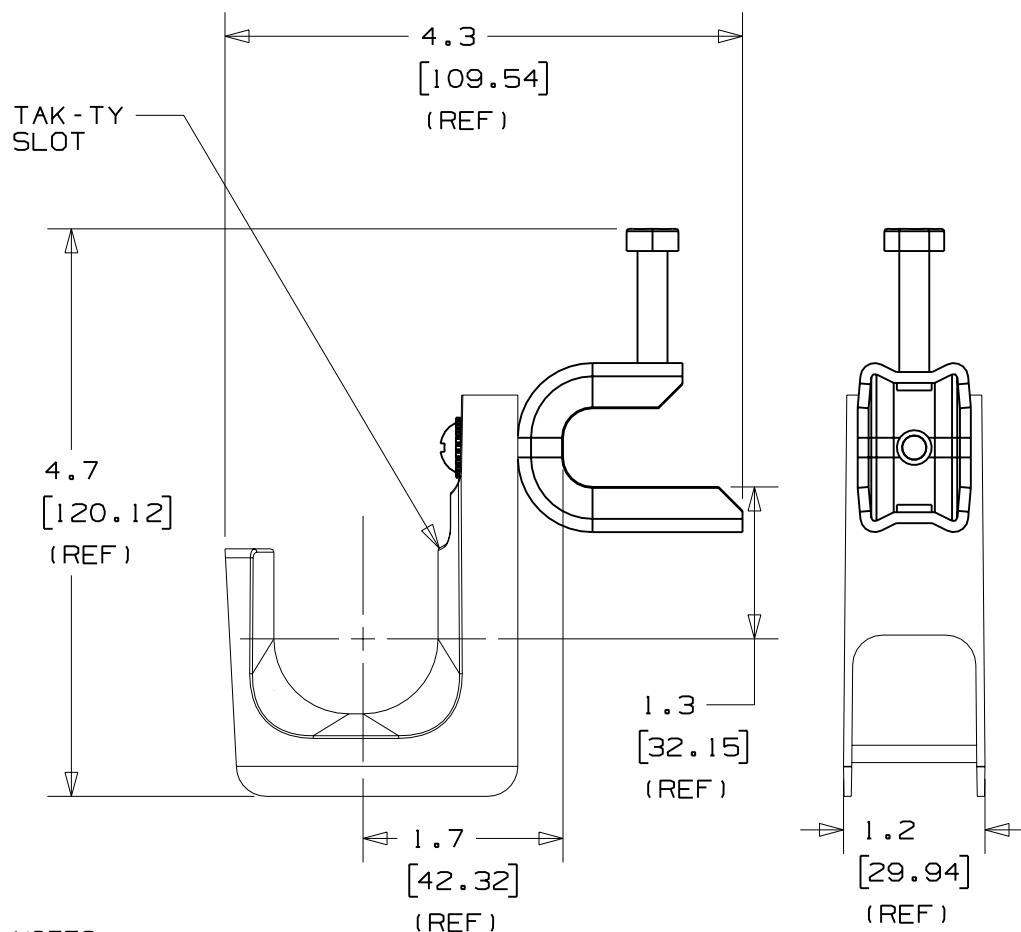

| PANDUIT<br>PART NO. | FLANGE<br>THICKNESS  | WEIGHT<br>lbs 10<br>(g) pcs |
|---------------------|----------------------|-----------------------------|
| JP131SBC50-__       | UP TO<br>0.50 (12.7) | 1.80<br>(816.5)             |

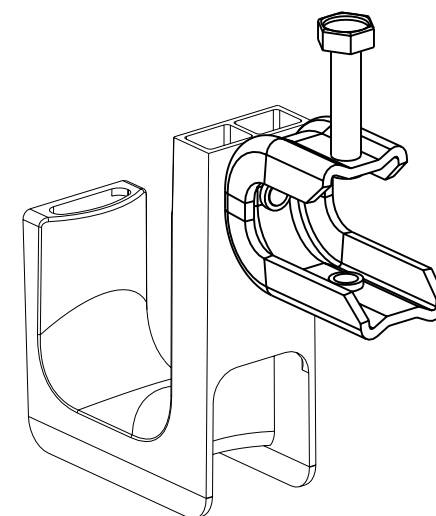

#### NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
- HOOK MATERIAL: NYLON 6/6  
BOLT MATERIAL: ZINC PLATED STEEL  
WASHER MATERIAL: ZINC PLATED STEEL  
CLAMP MATERIAL: PLATED STEEL
- PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 1 5/16" (33.34) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 25 lbs.
- PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
- PRODUCT MARKINGS:  
CULUS logo and statement:  
"SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."  
ULC logo and statement:  
"IN ACCORDANCE WITH CAN/ULC S-102.2 IN SINGLE UNITS OR PAIRS, 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=20."

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

CAD FILENAME/LAYERS G03043CF\_PB\_JP131SBC50\_00

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

J-PRO J-HOOK WITH  
SCREW-ON BEAM CLAMP  
(JP131SBC50-\_\_)

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)  
(.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JAD

MAT'L:

SCALE NONE

DATE 1/19/06

SEE NOTE 2

DRAWING NO.

GB3043CF

DWG  
A  
SIZE

|     |         |     |     |                 |          |     |      |     |  |
|-----|---------|-----|-----|-----------------|----------|-----|------|-----|--|
| R   | 1/19/06 | JAD |     | INITIAL RELEASE | GB3043CF | R   |      |     |  |
| REV | DATE    | BY  | CHK | DESCRIPTION     | ECN      | - R | CUST | SUP |  |