


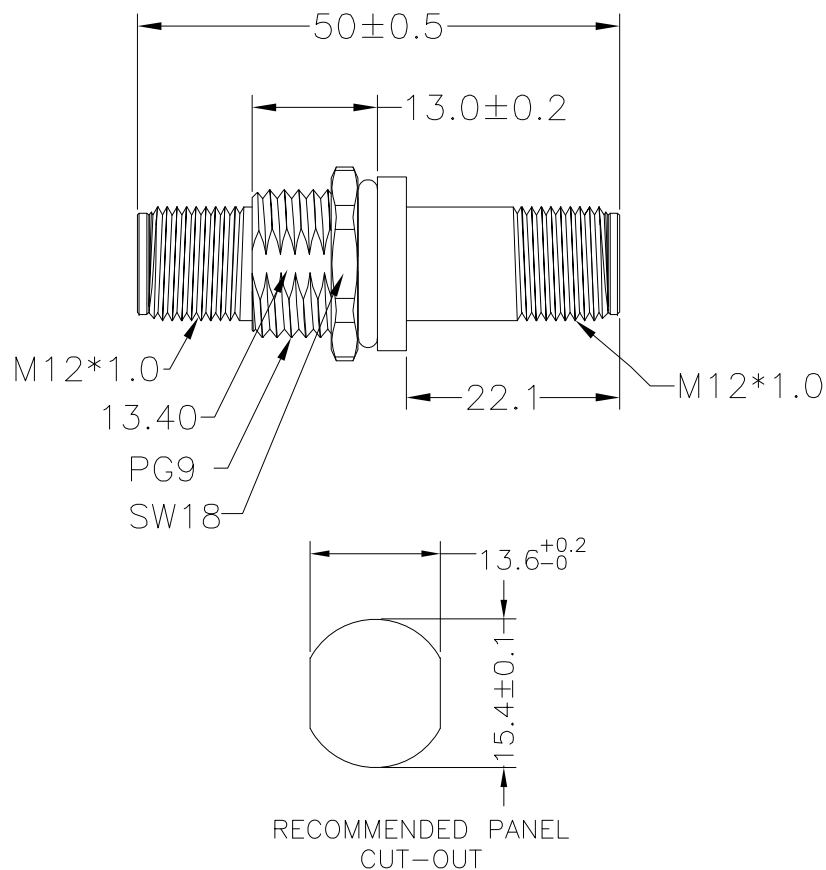

MALE

A04	A05	A08	D04	B05

NOTE:

MATERIAL

M12 INSULATOR
SHELL
CONTACT
NUT
O-RING

PA66, UL94V-0, BLACK
NICKEL PLATED BRASS
GOLD FLASH PLATED BRASS
NICKEL PLATED BRASS
FKM, GREEN

ELECTRICAL

RATED CURRENT 2A(8P) / 4A(4/5P)
VOLTAGE 30V(8P) / 60V(5P) / 250V(4P)
INSULATOR RESISTANCE 100 MOhms MIN.
CONTACT RESISTANCE 10 mOhms MAX.
MATING CYCLES 100 CYCLES MIN

ENVIRONMENT

OPERATION TEMPERATURE -40°C TO +85°C
IP RATING IP67 (UNCOUPLED & COUPLED)

RECOMMENDED TORQUE

0.4Nm TO 0.8Nm

S58-YYY-MMR001

SERIES S58 = M12 STRAIGHT ADAPTER

CONTACT ARRANGEMENT A04 = (2X) 4P A-CODE
A05 = (2X) 5P A-CODE
A08 = (2X) 8P A-CODE
D04 = (2X) 4P D-CODE
B05 = (2X) 5P B-CODE

GENDER MM = MALE / MALE

CONTACT PLATING 1 = GOLD FLASH

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/20/2021

TOLERANCES
.x ±0.5
.xx ±0.2
ANGULAR ±1°

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

1

DWG NO.

S58-YYY-MMR001