

# Through Hole Current Sense Transformers

VDE Approved



- Meet IEC950 insulation requirements
- 4250V<sub>RMS</sub> primary to secondary breakdown voltage
- Frequency range 10kHz to 200kHz

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part Number	I <sub>PK</sub> (Amps)	R <sub>T</sub> (Ω)	Drop (%)	K <sub>V</sub> (Volt/Amp)	L <sub>S</sub> (mH MIN)	DCR R <sub>S</sub> (ΩMAX)	Turns (N <sub>S</sub> ± 1%)	K <sub>B</sub>	K <sub>CL</sub>	R <sub>EO</sub> (mΩ)
PE-67050NL	35	15	2.4	0.30	5.0	0.70	50	.269 x 10 <sup>6</sup>	51.2 x 10 <sup>-6</sup>	.95
PE-67100NL	37	56	2.2	0.56	20	1.40	100	.0671 x 10 <sup>6</sup>	1.56 x 10 <sup>-6</sup>	.85
PE-67200NL	38	200	2.0	1.00	80	4.50	200	.0168 x 10 <sup>6</sup>	47.3 x 10 <sup>-9</sup>	.82
PE-67300NL	37	510	2.2	1.70	180	11.0	300	.00746 x 10 <sup>6</sup>	6.13 x 10 <sup>-9</sup>	.84



### Notes:

- These current sense transformers have a 1 turn primary winding, secondary turns (N<sub>S</sub>) as indicated in the table, and a 130°C insulation system.
- The reference values are for unipolar operation, 50kHz, 40% duty factor, and an estimated 55°C temperature rise.
- The maximum useable peak sense current (I<sub>PK</sub>) depends on the temperature rise or core saturation, which should be evaluated for the operating conditions.
- These Current Sense Transformers are recommended for switch mode power supply applications, unipolar or bipolar, operating at frequencies from 10kHz to 200kHz.
- The maximum recommended operating flux density (B<sub>OP</sub>) is 2000 gauss to prevent saturation at an operating temperature of 105°C.
- The core loss factor (K<sub>CL</sub>) is valid from 10kHz to 200kHz at 105°C.
- The terminating resistor (R<sub>T</sub>) may be varied to adjust operating flux (B<sub>OP</sub>), droop, or scale factor (K<sub>V</sub>).
- The scale factor (K<sub>V</sub>) is proportional to the terminating resistor (R<sub>T</sub>) and is equal to 1 volt/amp when R<sub>T</sub>=N<sub>S</sub>.
- The secondary inductance (L<sub>S</sub>) is measured at 15kHz and .5V for PE-67050, 1V for PE-67100, 2V for PE-67200 and 3V for PE-67300.

### Mechanical

### Schematic

#### PE-XXXXNL

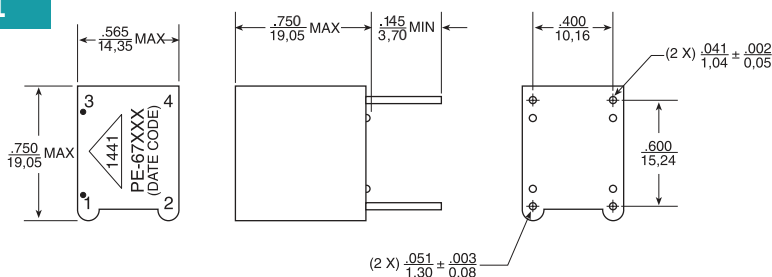

Parts per package .....80

Dimension:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$

## For More Information

**Pulse Worldwide Headquarters**  
12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.

**Pulse Europe**  
Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

**Pulse China Headquarters**  
B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Road  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057  
Tel: 86 755 33966678  
Fax: 86 755 33966700

**Pulse North China**  
Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

**Pulse South Asia**  
135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

**Pulse North Asia**  
3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.  
Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015. Pulse Electronics, Inc. All rights reserved.