
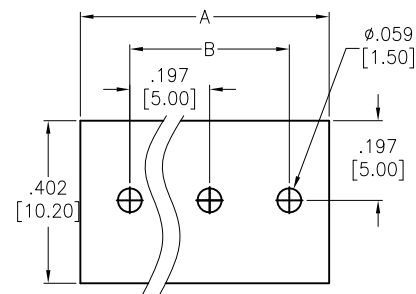




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/21/13	

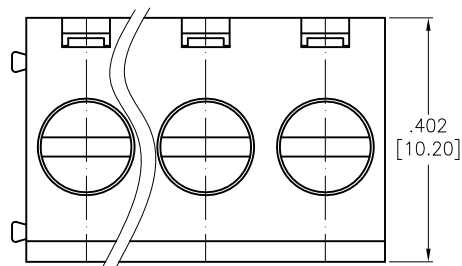

RECOMMENDED PCB LAYOUT

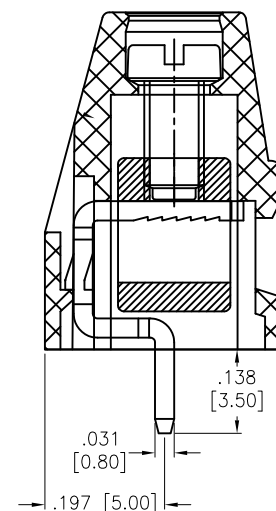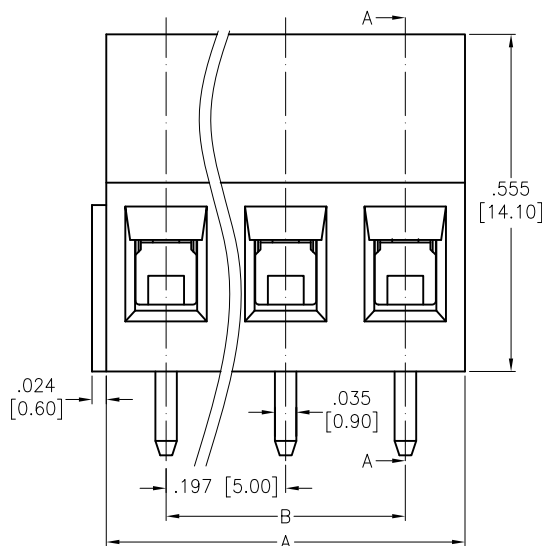

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator Color: Green

Contact: Brass, Tin plated.

Screw: Steel, M2.5, Zinc plated.

Cage: Brass, Nickel plated

Electrical:

Voltage rating: 300 V

Current rating: 16 A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 12~22 AWG, 2.5mm²

Wire strip length: 6~7mm

Torque: 0.4Nm, 3.6Lb-in

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A = .197" [5.00] x No. of positions

B = .197" [5.00] x No. of spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ± .10 .XX ± .020 .XXX ± .015				HOLESDIA X ± .10 DIA XX ± .015 DIA XXX ± .010			
APPROVALS				DATE			
DRAWN		HR		11/21/13			
CHECKED		SC		11/21/13			
APPROVED							

ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710					
TITLE MODULAR EURO BLOCK, VERTICAL, .197" [5.00] PITCH, COLOR GREEN					
SIZE X		PART NO. EBAG-XX-C		REV. -	
REF: S00067C		SCALE: NTS		SHEET 1 OF 1	