


163241221
(+OD6025-24HB01A)




DC Fan, 24V
60x60x25mm (2.36"x0.98")

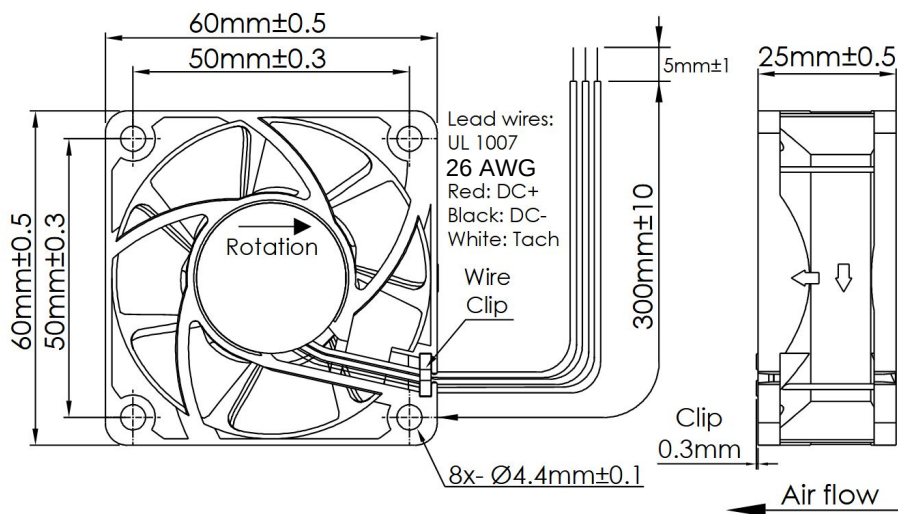

Frame	PBT UL94 V-0 Plastic	<u>Operating Temperature</u> -10°C ~ +70°C	Static Pressure ("H₂O) Airflow (CFM)
Impeller	PBT UL94 V-0 Plastic	<u>Storage Temperature</u> -40°C ~ +70°C	
Connection	2x Wire Leads, 26 AWG	<u>Life Expectancy</u> 70,000 hours (L10 at 40°C)	
Motor	Brushless DC, Auto Cutoff, Auto Restart, Electronically Protected, Polarity Protected	<u>Installed Options</u> No Ribs Frame Option Open Collector Tach Output	
Bearing System	Dual Ball Bearings	Weight: 0.14 lbs.	
Dielectric Strength	500VAC/min, <1mA		
Insulation Resistance	≥10M Ohm @ 500 VDC		

Part Number	163241221 (+OD6025-24HB01A)
Rated Voltage	24 VDC
Voltage Range	17 ~ 26.4
Rated Power	1.92 W
Rated Current	0.08 A
Rated Speed (RPM)	4490
Airflow (CFM)	23
Noise Level (dB)	33.3
Max. Static Pressure	0.248" H ₂ O

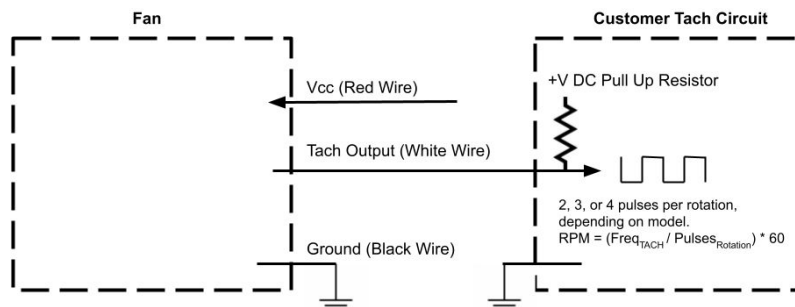

Tach Max Pullup Voltage: 24V
Tach Max Sink Current: 5mA
Tach Low Voltage: ≤0.5V
Tach Pulses per rotation: 2