



M-6018-16

16-channel Analog Input Module

Features

- 16-channel Differential Analog Input
- Current, Voltage or Thermocouple Input
- Adjustable CJC offset
- Open Thermocouple Detection
- Dual Watchdog



Introduction

The M-6018-16 is an analog input module that includes 16 differential analog input channels. The voltage input range can be from ± 15 mV to ± 2.5 V, the current input range can be either +4 to +20 mA, 0 to +20 mA, or ± 20 mA, and types J, K, T, E, R, S, B, N, C, L, M, LDIN43710 thermocouple can be used for the thermocouple input. Overvoltage protection of up to 120 VDC is provided. The module also features per-channel open wire detection for the thermocouple input types, and provides 4 kV ESD protection as well as 3000 Vdc intra-module isolation.

System Specifications

Communication	
Interface	RS-485
Bias Resistor	Switch Selectable (1 k Ω resistor)
Format	(N, 8, 1) (N, 8, 2) (E, 8, 1) (O, 8, 1)
Baud Rate	1200 to 115200 bps
Protocol	Modbus RTU, DCON
Dual Watchdog	Yes, Module (1.6 Seconds), Communication (Programmable)
LED Indicators/Display	
System LED Indicator	Yes, 1 as Power/Communication Indicator
I/O LED Indicators	-
7-segment LED Display	-
Isolation	
Intra-module Isolation, Field-to-Logic	3000 Vdc
EMS Protection	
ESD (IEC 61000-4-2)	± 4 kV Contact for each Terminal
	± 8 kV Air for Random Point
EFT (IEC 61000-4-4)	± 4 kV for Power Line
Surge (IEC 61000-4-5)	± 1 kV for Power Line
Power	
Reverse Polarity Protection	Yes
Input Range	+10 ~ +48 VDC
Consumption	0.5 W
Mechanical	
Dimensions (W x L x H)	116 mm x 120 mm x 64 mm
Installation	DIN-Rail or Wall Mounting
Environment	
Operating Temperature	-25 to +75°C
Storage Temperature	-40 to +85°C
Humidity	10 to 95% RH, Non-condensing

Applications

- Building Automation
- Factory Automation
- Machine Automation
- Remote Maintenance
- Remote Diagnosis
- Testing Equipment


I/O Specifications

Analog Input		
Channels		16
Wiring		Differential
Sensor Types	Thermocouple	J, K, T, E, R, S, B, N, C
	Voltage	± 15 mV, ± 50 mV, ± 100 mV, ± 500 mV, ± 1 V, ± 2.5 V
	Current	± 20 mA, 0 ~ +20 mA, +4 ~ +20 mA (requires an optional external 125 Ω resistor)
Resolution		16-bit
Accuracy		0.1% of FSR
Sampling Rate		10 Hz (Total)
Input Impedance		> 400 k Ω
Common Voltage Protection		25 VDC
Individual Channel Configuration		-
Overvoltage Protection		120 Vdc
Open Wire Detection (for thermocouple only)		Yes
Temperature Outputs Consistency		-
Stable Temperature Output in the Field		-


Thermocouple Type

Type Code	Thermocouple Type	Temperature Range
0E	J	-210 to +760°C
0F	K	-270 to +1372°C
10	T	-270 to +400°C
11	E	-270 to +1000°C
12	R	0 to +1768°C
13	S	0 to +1768°C
14	B	0 to +1820°C
15	N	-270 to +1300°C
16	C	0 to +2320°C


Wire Connections

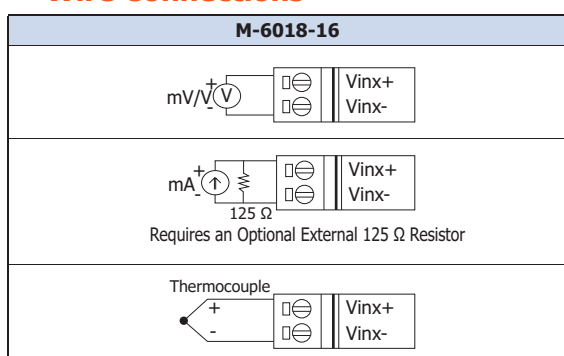


Pin Assignments

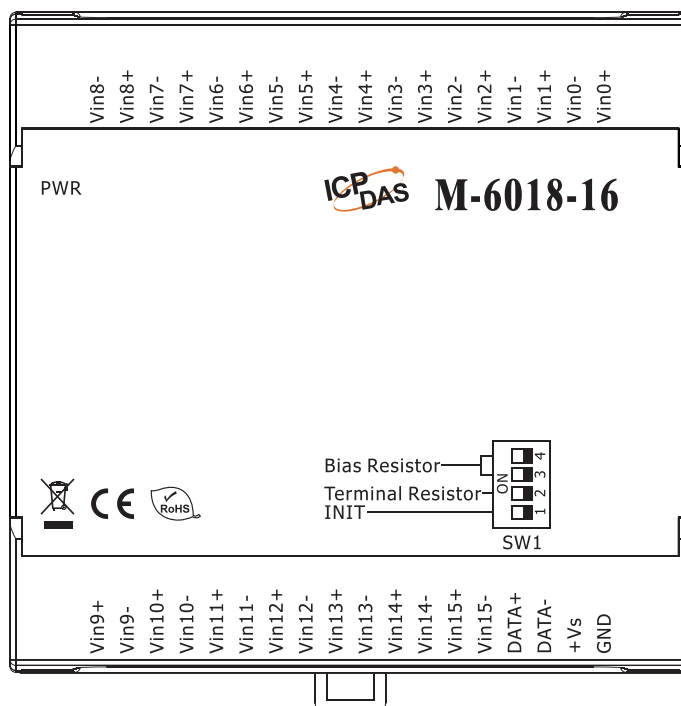

Dimensions (Units: mm)

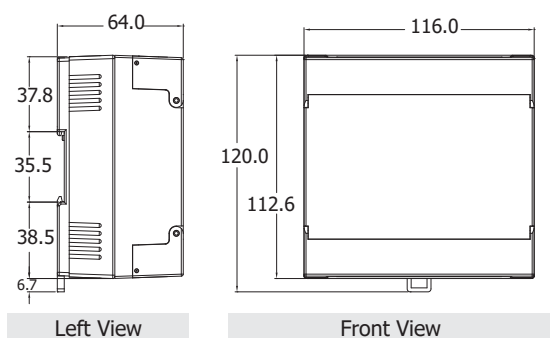

Internal I/O Structure

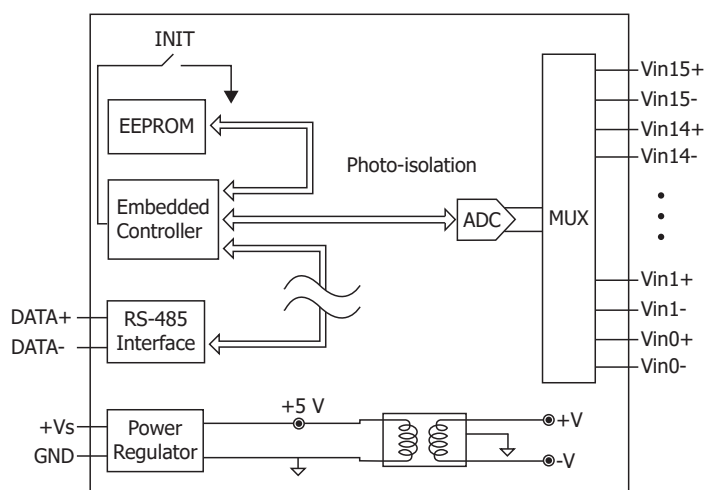

Ordering Information

M-6018-16 CR	16-channel Analog Input Module using the DCON and Modbus Protocols (RoHS)
---------------------	---

Accessories

2AB125R	125 Ω, 0.1% DIP Resistor used for Current Type Input Modules.
----------------	---