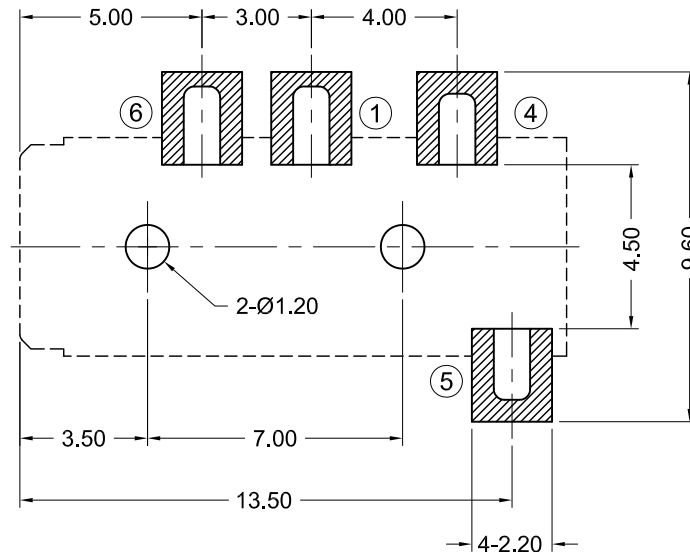
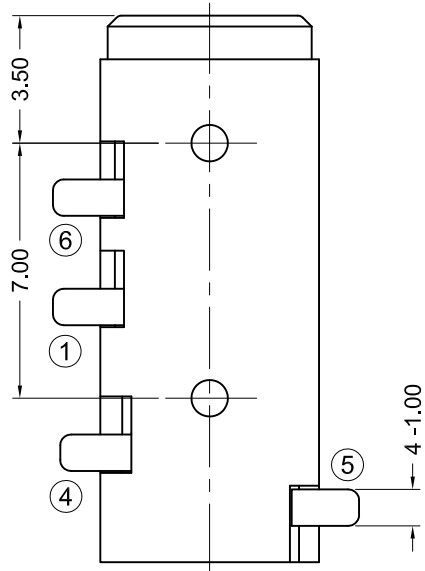
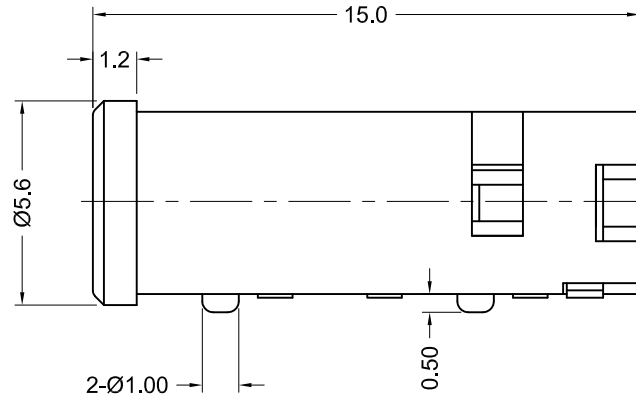
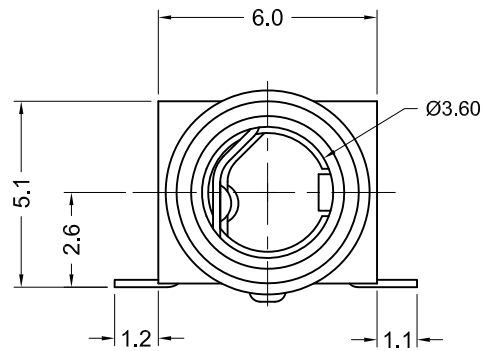


Material and Finish

Housing: High Temp, 94V-0

Terminals: Copper Alloy

Silver Plated

Electrical Characteristics

Contact Resistance:
Before Test: 50 milliohms max.
After Durability Test:
100 milliohms max.

Rated Voltage: 16V DC

Rated Current: 0.3A

Insulation Resistance:
100 Megohms min.
at 500V DC

Dielectric Strength:
500V AC RMS for 1 minute

Operating Temp:
-25°C to +70°C

RoHS COMPLIANT



Tolerances	
X.X ± 0.25	
X.XX ± 0.15	
Unless Stated Otherwise	

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	1/22/08	New Drawing	WILL H.	H. MA	WILL H.	1/22/08
A1	8/13/08	Release Drawing	H. MA	N/A		
A2	09/08/08	ECO# 08-076	S. Vien	H. MA	UNITS	mm
A3	09/14/09	ECO# 09-070	S. Vien	H. MA		
A4	11/23/16	ECO# 16-027	H. MA	W. Cook		

STX-35331-4N-TR

Ø3.5mm Audio Jack, RoHS Compliant

SMT, 4 Positions

