
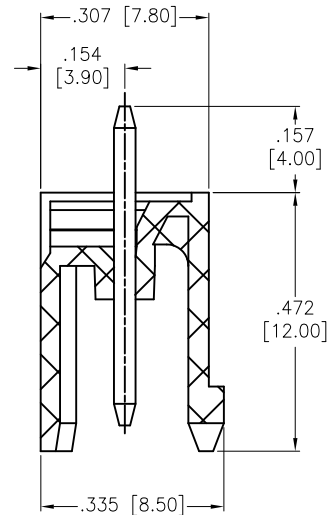




APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description     | Date    | Appr  |
|-----|-------|-----------------|---------|-------|
| -   |       | RELEASED        | 11/7/13 |       |
| A   |       | UPDATED DRAWING | 9/25/18 | HR/DH |

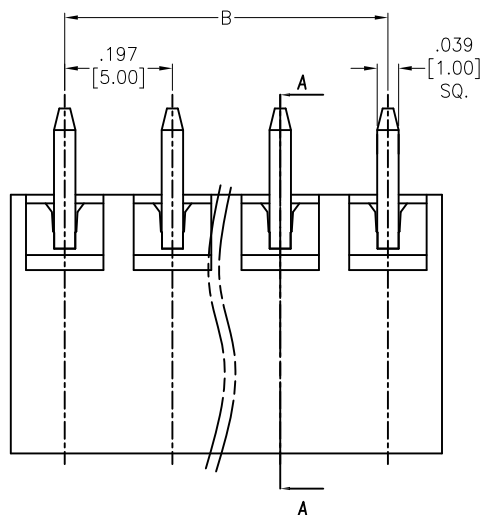

SECTION A-A

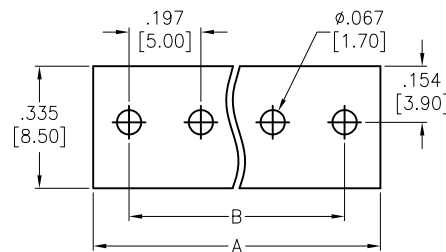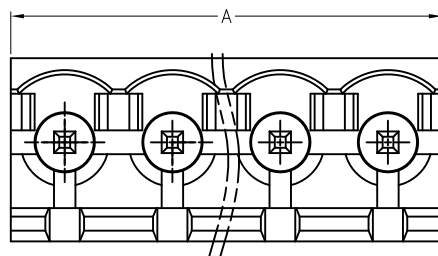

RECOMMENDED PCB LAYOUT

Positions: 02 thru 24

A = .197 [5.00] x No. of Positions

B = .197 [5.00] x No. of Spaces

#### SPECIFICATIONS:

##### Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Brass, Tin plated.

##### Electrical:

Operation voltage: 300 VAC max

Current rating: 15 Amps

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES  
.X ± .10 ØX ± .10  
.XX ± .020 ØXX ± .015  
.XXX ± .015 ØXXX ± .010

#### APPROVALS

| DRAWN    | AY | DATE    |
|----------|----|---------|
| CHECKED  | NP | 11/7/13 |
| APPROVED |    |         |

**ADAM**  
**TECH**  
INTERCONNECTS

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

#### TITLE

EURO BLOCK, .197 [5.00] PITCH, VERTICAL

| SIZE         | PART NO.  | REV.       |
|--------------|-----------|------------|
| X            | EBPA-XX-C | A          |
| REF:         | S00067C   | SCALE: NTS |
| SHEET 1 OF 1 |           |            |