

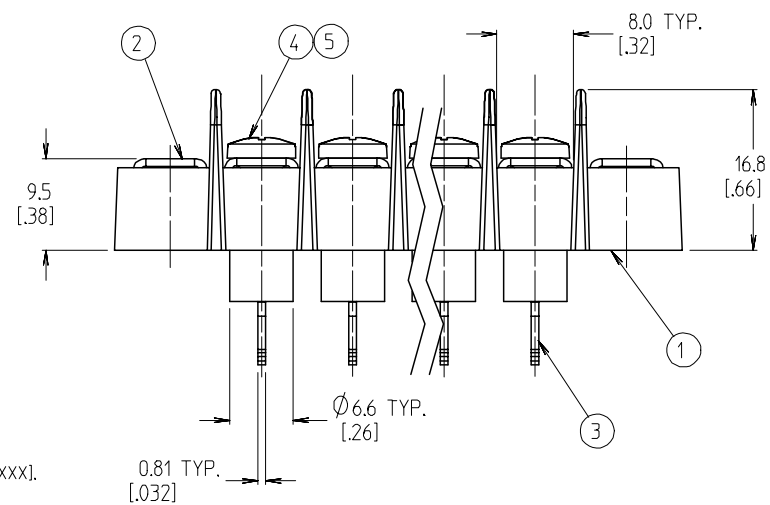


REF -50 OPTION SCREW
(WHERE APPLICABLE)

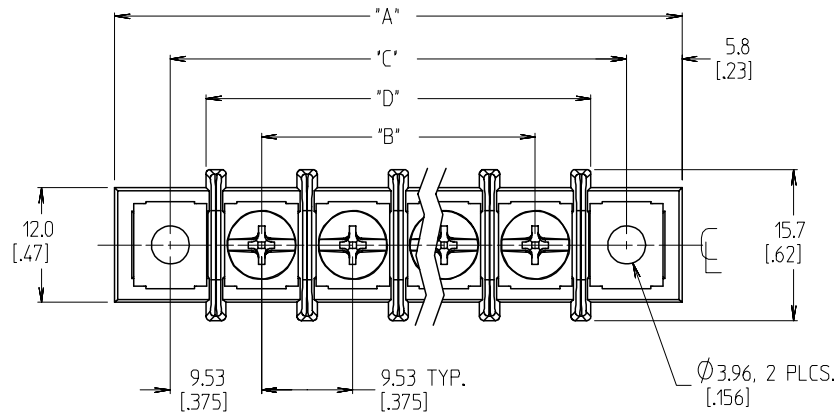


NOTES:

1. MATERIAL: SEE TABLE
2. INCH DIMENSIONS ARE SHOWN IN BRACKETS [XXX].
3. "XX" REFERS TO THE QUANTITY OF CIRCUITS.
4. ALL COMPONENTS ARE ROHS COMPLIANT.

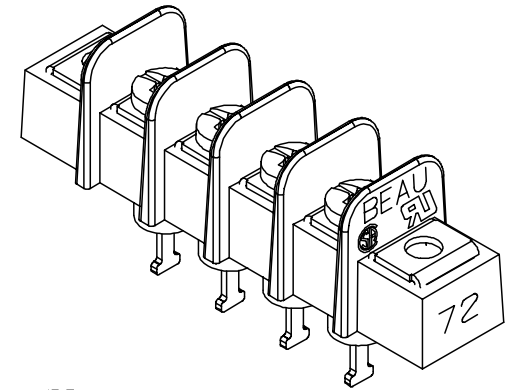

4 CIRCUIT SHOWN

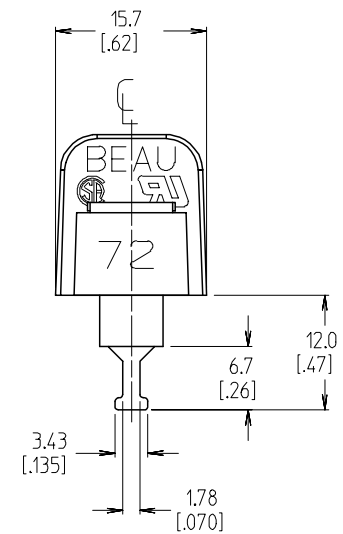

XX	SCREW&WASHER, 6-32X.250, PAN, PH/SL (-50 OPTION)	STEEL	ZN, CLEAR CHROMATE
XX	SCREW, 6-32X.250, BHD, PHIL-SLOT (-49 OPTION)	BRASS	NICKEL
XX	SCREW, 6-32X.250, BHD, PHIL-SLOT (STANDARD)	STEEL	ZN, CLEAR CHROMATE
XX	TERMINAL, SOLDER TURRET	BRASS	TIN
XX	MOUNTING PLATE	BRASS	NICKEL
1	INSULATOR, SR, W/MTG	THERMOPLASTIC	BLACK

QTY	DESCRIPTION	MATERIAL	FINISH	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
							mm	INCH	MM/IN	DATE	TITLE	INCH		
					INITIAL RELEASE	▽=0	4 PLACES	± ---	± ---	DRAWN BY	2:1	9.53MM [.375] SR BTS ASSY, INSULATED TURRET TERMINAL W/MTG	MOLEX INCORPORATED	
					EC NO: ETC2007-0073	▽=0	3 PLACES	± ---	± .005	DATE				
					DRWN:EHLE		2 PLACES	± 0.13	± .01	CHECKED BY				
					CHKD: JMACNEIL		1 PLACE	± 0.25	± ---	JMACNEIL				
					APPR: JMACNEIL		ANGULAR ± 2 °		APPROVED BY	DATE				
							DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.	DOCUMENT NO.			SHEET NO.	
					A				SEE CHART	SD-38720-010			1 OF 2	
									THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

