

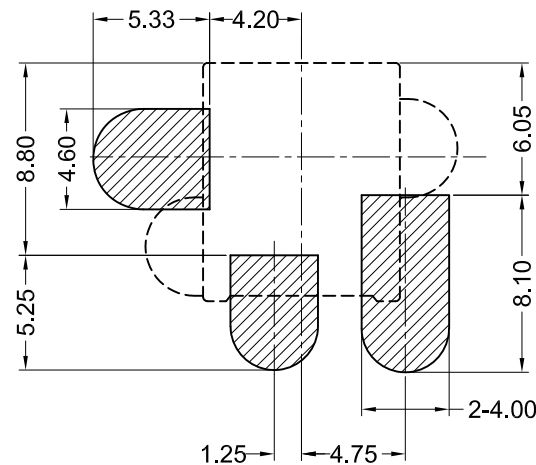
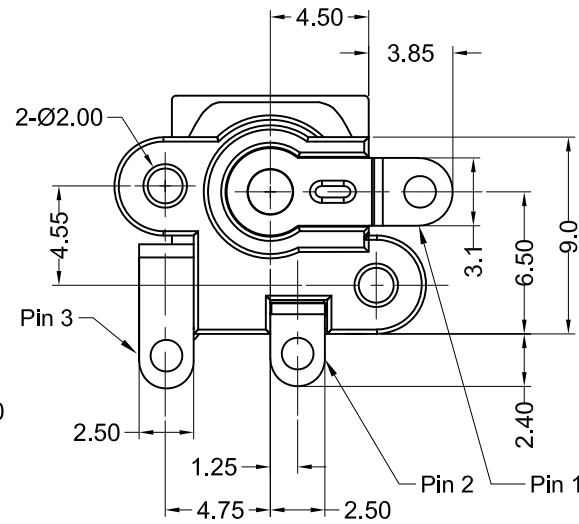
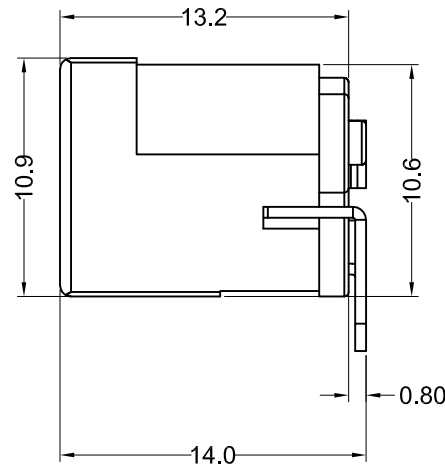


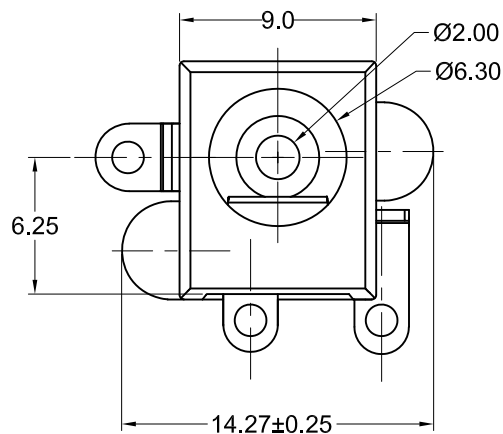

Recommended PCB Layout
(Top View)



Schematic

Material and Finish

Main Housing: LCP
Bottom Cover: PA9T
UL94V-0, Color: Black
Center Pin: Copper, Nickel Plated
Contact #1: Brass, Silver Plated
Contact #2: Phosphor Bronze, Silver Plated
Contact #3: Brass, Silver Plated

Electrical Characteristics

Rated Voltage: 16V DC
Rated Current: 3.5 Amps

Contact Resistance

Before Test:
Between Terminals:
30 milliohms Max.
Plug to Contacts:
50 milliohms Max.

After Test:
Between Terminals:
60 milliohms Max.
Plug to Contacts:
100 milliohms Max.

Insulation Resistance:
100 Megohms Min.at 500V DC
Dielectric Withstanding Voltage:
500V AC for 1 minute

Mechanical Characteristics

Durability Test: 5000 cycles
Insertion Force: 0.3kg-3.0kg
Extraction Force: 0.3kg-3.0kg
Operating Temp: -25°C to +85°C
Reflow Temperature:
230°C for 30 sec.
260°C max

Part Number	Center Post Diameter	Packaging
KLDVX-SMT-02-ATR	Ø2.00	Tape & Reel (TR option)



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A2	11/15/05	ECO#05-064	R. Aguirre	H. MA	R. Aguirre	10/04/05
A3	11/24/08	ECO# 08-088	S. Vien	H. MA		
A4	08/19/10	ECO# 10-058	S. Vien	H. MA		
A5	05/06/13	ECO #13-015	W. Cook	P. DalCanto		
A6	06/20/13	ECO #13-041	W. Cook	P. DalCanto		
A7	08/03/18	Address Update	G. Serrato	D. Shehan		

KLDVX-SMT-02-A

Power Jack, Vertical SMT, RoHS Compliant

Ø2.0mm Center Pin

