

H MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3-19

CK-A1900

V3-19

M

DRAWING
NUMBER

ISSUE

M12

REPLACES

RELEASE NO.

DATE

CHECK

DATE

CHECK

DATE

CHECK

DATE

CHECK

DATE

CHECK

DATE



CHECK

DATE

CHECK

DATE

CHECK

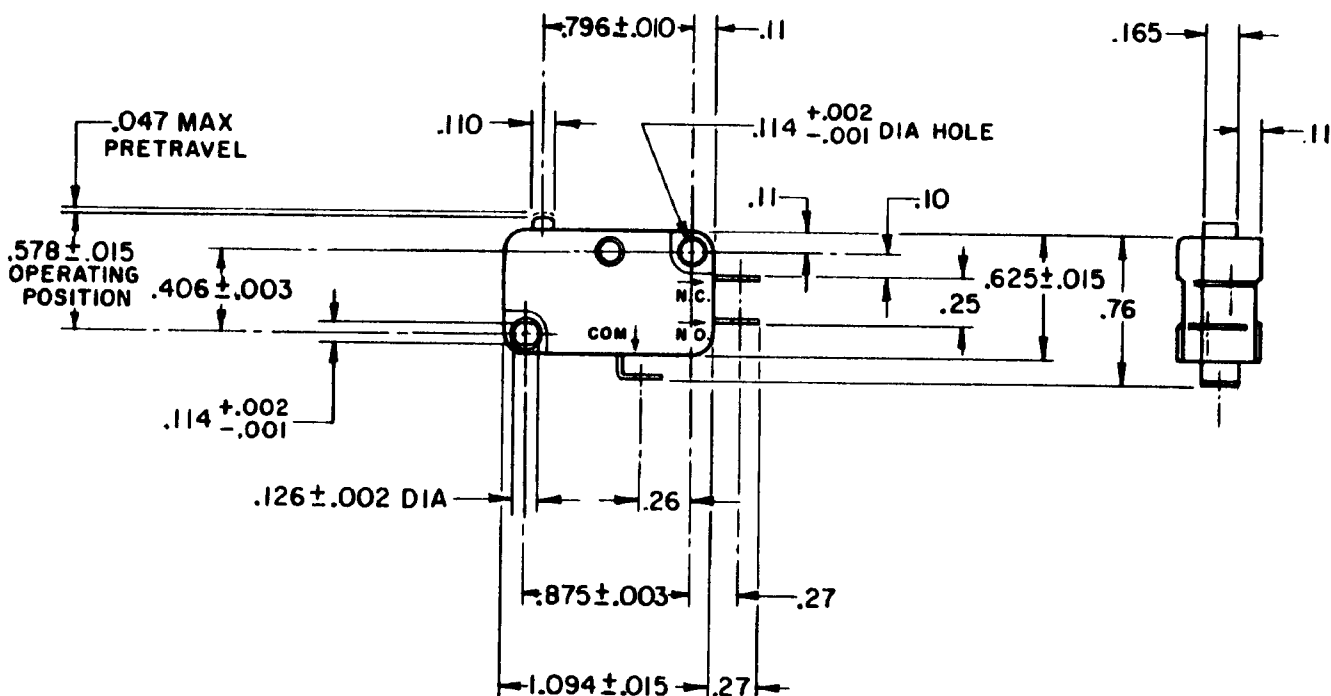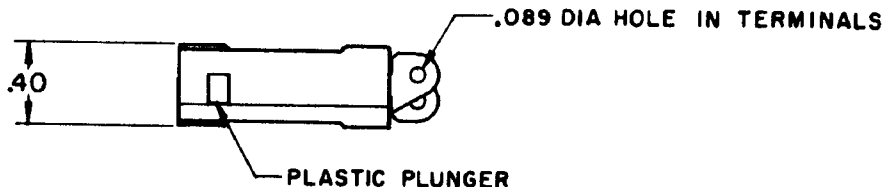

NOTE -
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 6 — 14 OZ
RELEASE TRAVEL — — — — .007 MIN
RELEASE FORCE — — — — 4 OZ MIN
DIFFERENTIAL TRAVEL — — .006 — .016
OVERTRAVEL — — — — .040 MIN
FREE POSITION — — — — .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

RAI

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .016 LB

FO-50378

DRAWN

DATE

CHECK

DATE