

Micro-Fit Cable Assemblies


molex

Standard Micro-Fit TPA and non TPA Cable Assemblies deliver an off-the-shelf solution with a variety of cable lengths and a 3.00mm-pitch connector with a 6.5 to 8.5A maximum current rating to facilitate both prototyping and global production

Features and Advantages

Multi-color cable configurations with Micro-Fit TPA and non TPA Receptacles available off the shelf

Designed to support development and production programs. Multi-color cables ensure correct connection

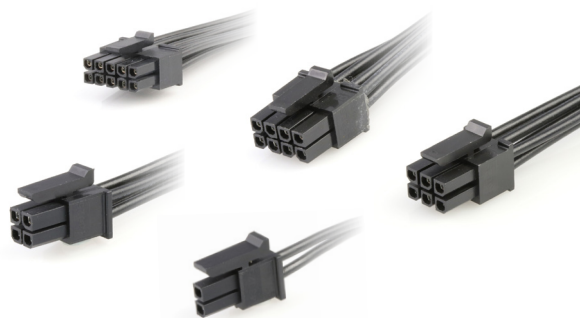

Available in single- and dual-row configurations
Provides design flexibility

Micro-Fit TPA and non TPA Receptacles' 6.5 to 8.5A current rating and 3.00mm pitch

Delivers a high-density, lower power connection. Reduces terminal back-out

Micro-Fit TPA Cable Assemblies

Meets 2011/65/EU RoHS Compliance
Decreases engineering time and resources

Assembled in ISO/TS16949-certified facilities
Ensures high quality. Meets current automotive industry standards

Applications

Consumer / Home Appliance

- Harness manufacturers
- Appliances

Data / Computing


- Harness manufacturers
- Desktops
- Workstations
- Power supplies
- Uninterruptible Power Supply (UPS)

Telecommunications / Networking

- Harness manufacturers
- Servers
- Routers
- Switches

Automotive / Commercial Vehicle

- Harness manufacturers
- Non-sealed applications
- Inside devices

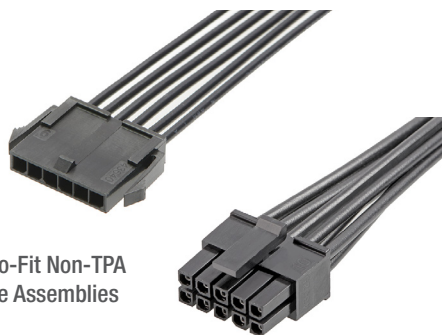

Micro-Fit Non-TPA Cable Assemblies

UL 1007 discrete wires (TPA versions); UL1061 discrete wires (single-row; TPA versions); UL 1061 discrete wires (dual-row; non TPA versions)
Ready to use in electronic appliance applications. Provide ease of design, prototyping and production



Workstation



Refrigerator



Servers

Specifications

REFERENCE INFORMATION

Packaging:
UL File No.: E29179
CSA File No.: LR19980
Mates With:
Micro-Fit 3.0 Connectors
Use With: Micro-Fit Headers
Designed In: Millimeters
RoHS: Yes
Halogen Free: No, Low Halogen
Glow Wire Compliant: No

ELECTRICAL

Voltage (max.): 300V AC/DC
Current (max.): 6.5 to 8.5A

MECHANICAL

Contact Insertion Force (max.): 14.7N per contact
Contact Retention to Housing (min.): 24.5N
Mating Force (max.): 8N per circuit
Durability (max.): typically 30 cycles, refer to product specifications

PHYSICAL

Housing:
Panel Mount Ears
Receptacle: Black; without TPA
Plug: Black; without TPA
Flammability:
UL 94V-0
Operating Temperature:
Up to 105°C for TPA variant
Up to 80°C for non TPA variant
Up to 105°C for single row TPA variant
Plating:
Contact Area--Tin (1.02µm) and Gold (0.76µm)

Ordering Information

Series No.	Product	Circuits	Lengths (mm)
45132	Off-the-Shelf Micro-Fit Dual-Row TPA Discrete Wire Cable Assemblies	4, 6, 8	150.00, 300.00 and 600.00
145132	Off-the-Shelf Micro-Fit Single-Row TPA Discrete Wire Cable Assemblies	2 to 7	150.00, 300.00 and 600.00

Custom Product	Description
Contact Molex	Micro-Fit Discrete Wire Cable Assembly, Custom Lengths and Other Options

Series	Description	Circuit	Lengths (mm)
45132	Off-the-Shelf Micro-Fit Dual-Row TPA Discrete Wire Cable Assemblies	4, 6, 8	150.00, 300.00, 600.00
145132	Off-the-Shelf Micro-Fit Single-Row TPA Discrete Wire Cable Assemblies	2 to 7	
214755	Off-the-Shelf Micro-Fit Dual-Row non TPA Discrete Wire Cable Assemblies	2, 4, 6, 8, 10	
214756			
214757			
214758			

Series	Description	Circuits	Lengths (mm)
214750	OTS Micro-Fit 3.0 DR Discrete Wire Cable Assemblies Gold and Tin	2, 3, 4, 5, 6, 8, 10	150.00, 300.00, 600.00
214751			
214752			
214753			

www.molex.com/link/otscableassemblies.html

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.