


250 Watt

- 4.5 x 2.5 X 1.5
- Mounting as per 4 X 2 footprint / 3 X 5 footprint
- 250 Watt Convection Cooled & 350 Watt Forced Cooled
- Efficiency up to 94%
- -40 to 70 °C operating temperature
- High power density: 20.74 W/inch³
- EMC IEC 60601-1-2:2014 (Ed 4.0)
- 12 V Fan O/P / Thermal Shut-Down feature / Dual fusing
- Current Sharing (optional with ADD-ON card)
- 5 V STBY/ PGPF Signal / Remote ON-OFF Feature (optional)
- 800K Hours, Telcordia -SR332-issue 3 MTBF
- No Load Power < 1W
- Suitable for BF applications
- Available with metal enclosures / accessories

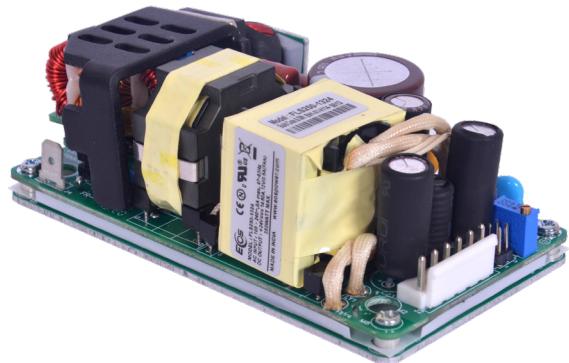

Dimension

FLS : 4.5 x 2.5 x 1.5 Inches
Form factor

The New MFLS250 series is true fanless power up to 250W. this is a highly efficient power supply that can deliver up to 350W with air. The power supply is packed in 4.5" x 2.5" size having the option of industry-standard 2" x 4" or 3" x 5" like a mounting option. Also available in various type of casing option.

250 Watts

Model Number	Description	Voltage	Max. Load (Convection)	Max. Load (375 LFM)	Min. Load	Ripple ¹
MFLS250-1X12	with Screw Terminal	12V	16.60A	25.00A	0.0A	2%
MFLS250-1X12	with JST Connector	12V	16.60A	18.00A	0.0A	2%
MFLS250-1X15	with Screw Terminal	15V	13.30A	20.00A	0.0A	2%
MFLS250-1X15	with JST Connector	15V	13.30A	18.00A	0.0A	2%
MFLS250-1X24	with Screw Terminal	24V	10.41A	14.50A	0.0A	1%
MFLS250-1X24	with JST Connector	24V	10.41A	14.50A	0.0A	1%
MFLS250-1X30	with Screw Terminal	30V	8.30A	11.60A	0.0A	1%
MFLS250-1X30	with JST Connector	30V	8.30A	11.60A	0.0A	1%
MFLS250-1X48	with Screw Terminal	48V	5.20A	7.20A	0.0A	1%
MFLS250-1X48	with JST Connector	48V	5.20A	7.20A	0.0A	1%
MFLS250-1X58	with Screw Terminal	58V	4.30A	6.0A	0.0A	1%
MFLS250-1X58	with JST Connector	58V	4.30A	6.0A	0.0A	1%

Notes:

- For Screw Terminal version replace "X" above with "0", example MFLS250-1024.
- For Header version replace "X" above with "3", example MFLS250-1324
- Add Suffix "B" for 3 X 5 Mounting option, example MFLS250-1024-B
- For Power supply unit with L bracket (metal accessory option) add "-L" suffix at the end of model number
- For Power supply unit with U channel (metal accessory option) add "-U" suffix at the end of model number
- For Power supply unit with CK Cover kit (metal accessory option) add "-CK" suffix at the end of model number

- For Current Sharing (ADD-ON CARD) Option, (pls contact EOS RSM for further details and ordering)
- For 5V STBY / Remote ON-OFF / PGPF use model number MFLS250-2XXX, (pls contact EOS RSM for further details and ordering).
- MFLS250 -L Bracket, -U channel, - CK Metal Cover Kit Accessory Available. (pls contact EOS RSM for further details and ordering)

Pin Connection		
J1 (Input)	PIN 1	AC LINE
	PIN 2	NOT FITTED
	PIN 3	AC NEUTRAL
J2 Option 1 & 2 (Output)	PIN 1,2,3	V1 +VE
	PIN 4,5,6	V1 -VE
J4 (Earth)		Quick Disconnect
(J9) Signal Connector	PIN 1	+VS
	PIN 2	-VS
	PIN 3	FAN -
	PIN 4	FAN +
J(310) (Multifunction Connector)***	PIN 1	+5V
	PIN 2	GND
	PIN 3	GND
	PIN 4	REMOTE ON/OFF
	PIN5	PGPF

Notes: _____

- **** mark content available only in MFLS250-2XXX series
- Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Electrolytic capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges.
- Specifications are for nominal input voltage, 25°C unless otherwise stated.
- 250W with natural convection cooling at 100 to 264VAC.
- 350W with Forced cooling at 100 to 264VAC.
- Combine Output Power of Main Output, Fan supply and Standby shall not exceed max power rating.
- Output ripple can be more than 1 % of the output voltage.
- When used in Cover Kit, de-rate output power to 70% under all operating conditions.
- **** Standby output voltage 5 V/ 0.5A(convection) with tolerance including set point accuracy, line and load regulation is +/-10 %.Ripple and noise is less than 5 %.

Input					
Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	85		264	VAC	De-rate linearly from 100% at 100VAC to 80% at 85VAC
	120		370	VDC	
Input Frequency	47		63	Hz	
Input Current			6.3	A	
Inrush Current	115 VAC - 25A	230VAC - 45A	264 VAC -75A	A	
No Load Input Power			1	W	
Power Factor	exceeds 0.95 at Full Load				

Output


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Power		250	350	W	
Hold-up Time		8mS			At 230 VAC
Line Regulation			+/-0.5%		
Load Regulation			+/-0.5%		
Output Voltage Adjustability			+/-3%		
Rise Time		55		ms	
Set Point Tolerance		+/-1%			
Over Current Protection		> 110%			
Over Voltage Protection		110 to 140%			
Transient Response		25% step load change, at 0.1A/uS slew rate, 50% duty cycle, 50Hz=4% , recovery time < 5 ms			

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency	92%		94%		At 230 VAC
Mean Time Between Failure	800K Hours				Telcordia -SR332-issue 3
Isolation: Input to Output		4380		VAC	Input to Output: 4380VAC (2x MOPP),
Input to Ground		1690			Input to Ground: 1690VAC (1x MOPP),
Output to Ground		1500			Output to Ground: 1500VAC (1x MOPP)
Leakage Current		300 uA Typical; Touch current <100uA			

Efficiency Vs Load

Load V/S Efficiency

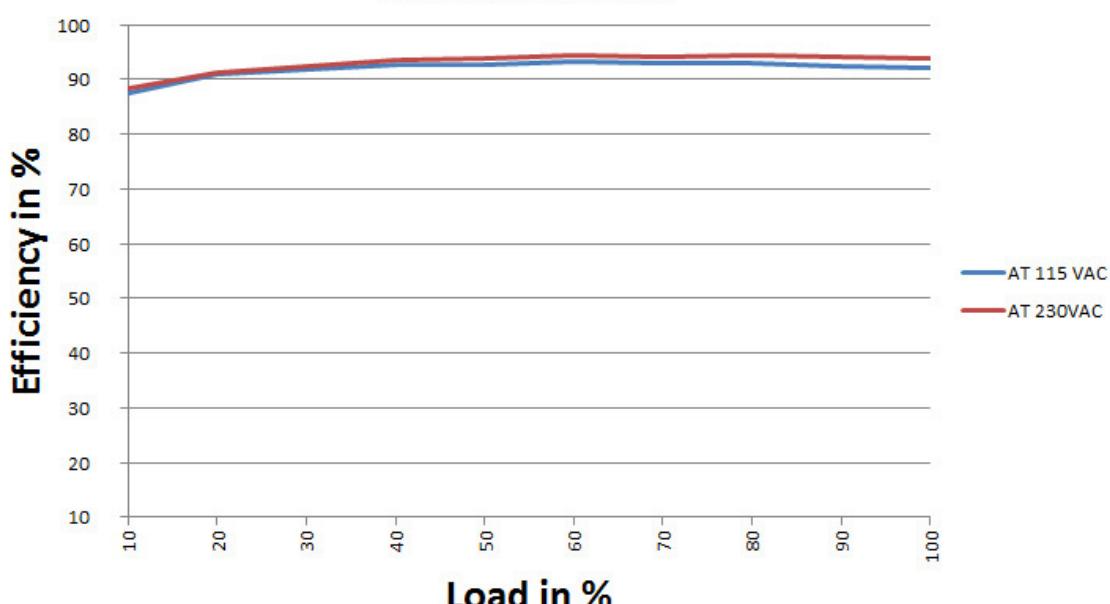

Environmental


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-40		70	°C	-40 to 0 startup is guaranteed with spec deviation. 70°C (Derated)
Storage Temperature	-40		85	°C	
Relative Humidity	5		95	%	
Operating Altitude			16,000	ft	RH, non-condensing
Short Circuit Protection		Hiccup mode			
Switching Frequency		PFC – 70 to 130 KHz , PWM – 50-80 KHz			
Cooling					350W with 375 LFM forced air cooling at 100 to 264VAC 250W with natural convection cooling at 100 to 264VAC

Signals & Controls

Characteristic	Notes & Conditions
***Power Good	Is a TTL signal which goes high after main output reaches 90% of its set value. The delay is 0.1 s to 0.5 s
***Power Fail	The same signal goes low at least 1ms before main output falls to 90% of set value at AC Power off
***Remote on/off	Shorting Pin 3 to Pin 4 enables main output while keeping the Pins open disables main output.


Signals & Controls Drawing

***Power Good / Power Fail Signal

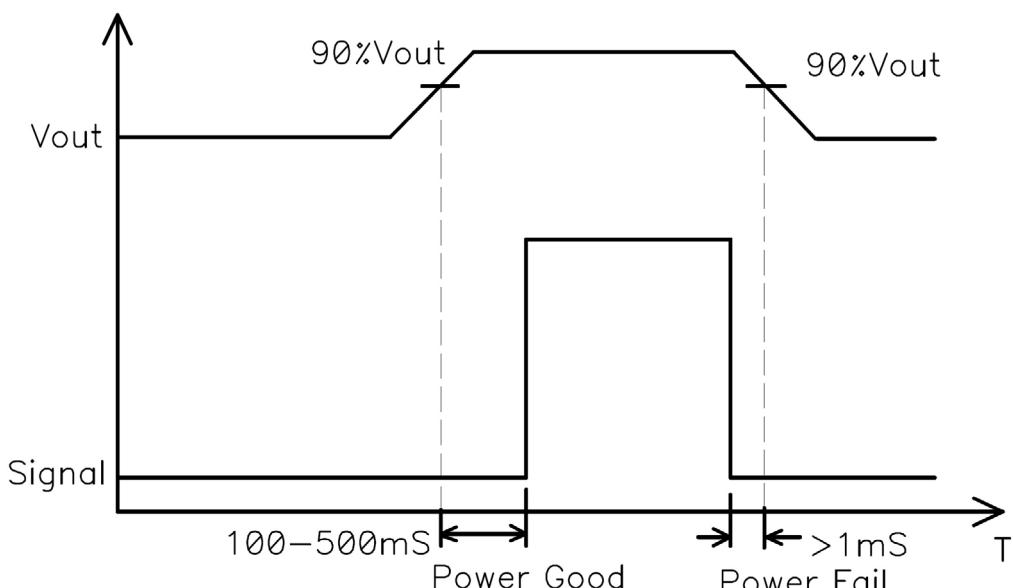


Signals & Controls Drawing

*** Remote ON OFF

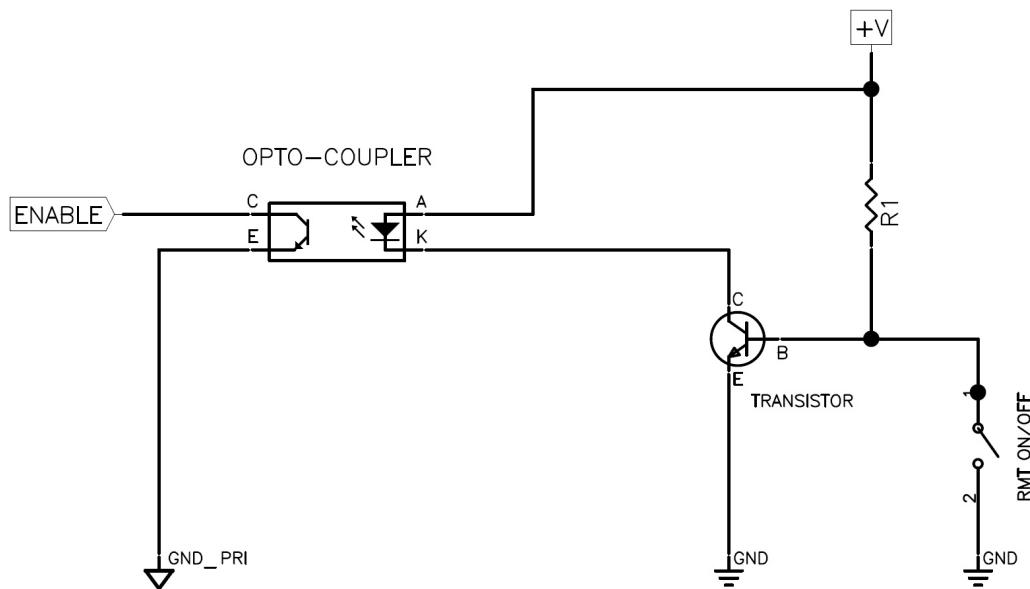

Signals & Controls Drawing

Voltage Sense

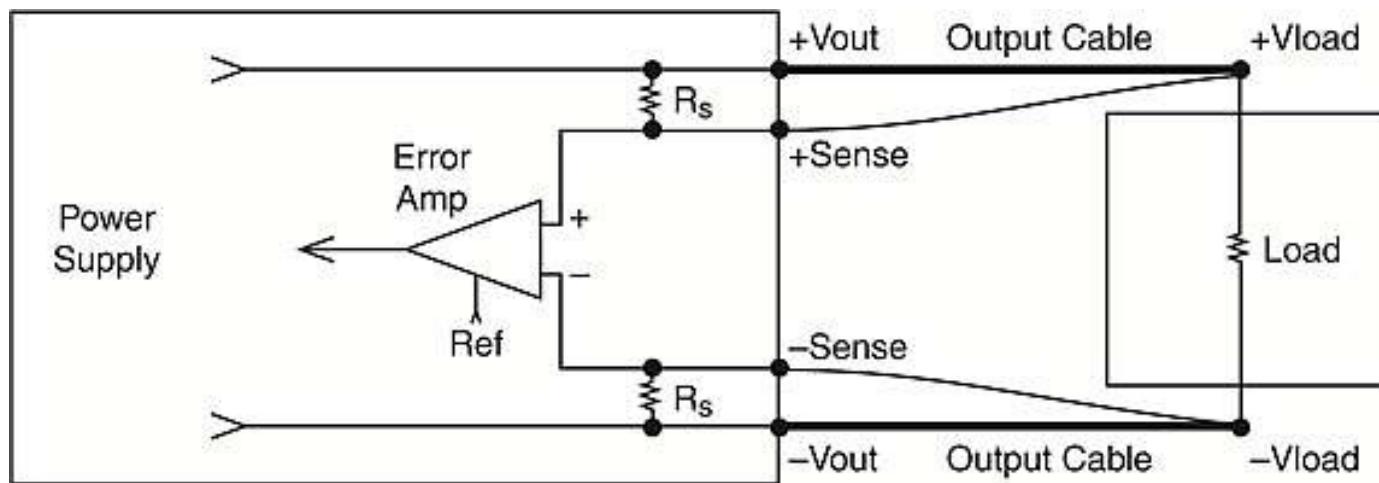

Mechanical Specifications

AC Input Connector (J1)	Molex: 26-60-4030 Mating: 09-50-3031; Pins: 08-50-0106
DC Output Connector (J2) Option 1 (Screw Terminal)	Molex: 39357 Series or equivalent
DC Output Connector (J2) Option 2 (JST Connector)	JST p/n: B6P-VH(LF)(SN) Mating: JST p/n: VHR-6M; Pins: SVH-41T-P1.1
Signal Connector (J9)	Molex Part No: 10-89-7041 or equivalent Mating part no: 1053082204 ; Pins: 1053001100
J(310) (Multifunction Connector)***	HEADER 5POS 2.54MM) P/N : P9102-40-12-1 Mating part no : CONN RCPT HSNG 5POS CST-100 II P/N :1375820-5 Pins : CONN SOCKET 22-26AWG CRIMP TIN P/N : 1375819-1
Dimensions	4.5 x 2.5 x 1.58 inches (114.30 x 63.5 x 40 mm)
Weight	400 gm approx

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN 55011	Level B	CISPR22-B, FCC PART15-B
Radiated	EN 55011	Level A	Level B with external core (King core K5B RC 25x12x15-M or Equivalent in input cable)

EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Input Current Harmonics	EN 61000-3-2		Class A	
Voltage Fluctuation and Flicker	EN 61000-3-3			compliance
ESD Immunity	EN 61000-4-2	Level 4	A	
Radiated Field Immunity	EN 61000-4-3	Level 3	A	
Electrical Fast Transient Immunity	EN61000-4-4	Level 3	A	
Surge Immunity	EN 61000-4-5	Level 3	A	
Conducted Immunity	EN61000-4-6	Level 3	A	
Magnetic Field Immunity	EN61000-4-8	Level 4	A	
Voltage dips, interruptions	EN61000-4-11		A & B	

Standard IEC60601-1-2:2014 (4th Edition)


Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
CB	IEC 60601-1:2005, IEC 60601-1:2005/AMD1:2012	
Nemko	EN60601-1	
UL	ANSI /AAMI 60601-1	
CSA	CSA C22.2 No.60601-1	
CE Mark	Complies with LVD Directive	

www.eospower.com

Derating Curve


Output Derating v/s Input Voltage

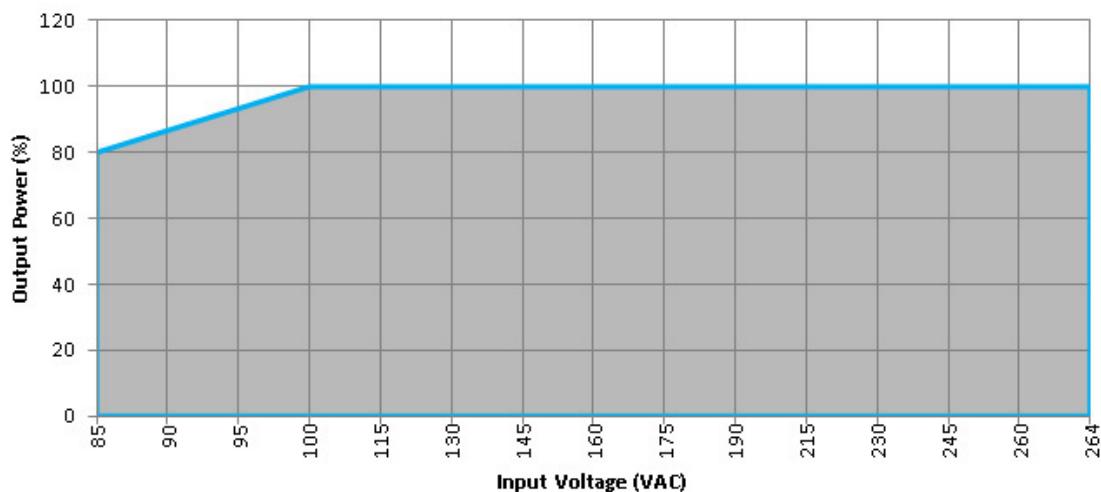

De-rate linearly from 100% at 100VAC to 80% at 85VAC

Derating Curve

Power de-rating : 24V,30V,48V,58V

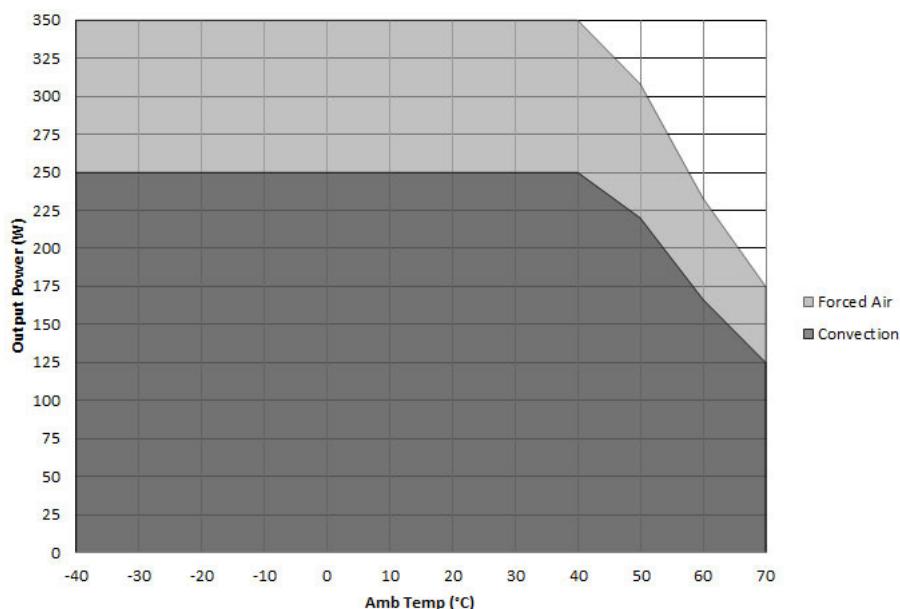


Convection load: 250W up to 40 °C. De-rate Between 40°C -50°C @ 1.2 % per °C above 50 °C @ 1.67 % per °C

Forced air cooled load: 350W up to 40 °C. De-rate Between 40°C -50°C @ 1.2 % per °C above 50 °C @ 1.67 % per °C

Derating Curve

Power de-rating : 12V,15V

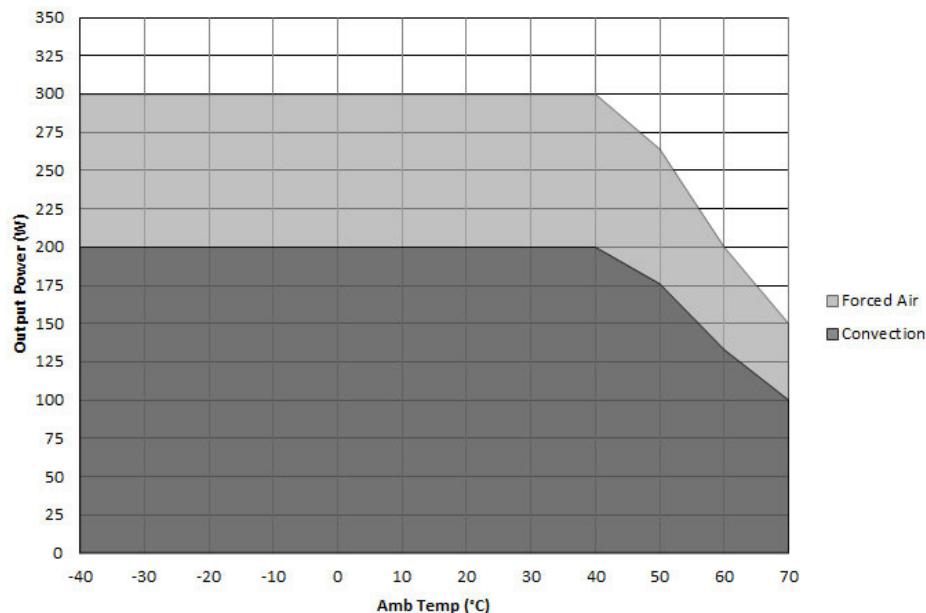


Convection load: 200W up to 40 °C. De-rate Between 40°C -50°C @ 1.2 % per °C above 50 °C @ 1.67 % per °C

Forced air cooled load: 300W up to 40 °C. De-rate Between 40°C -50°C @ 1.2 % per °C above 50 °C @ 1.67 % per °C

Derating Curve


De-rating for CK Bracket

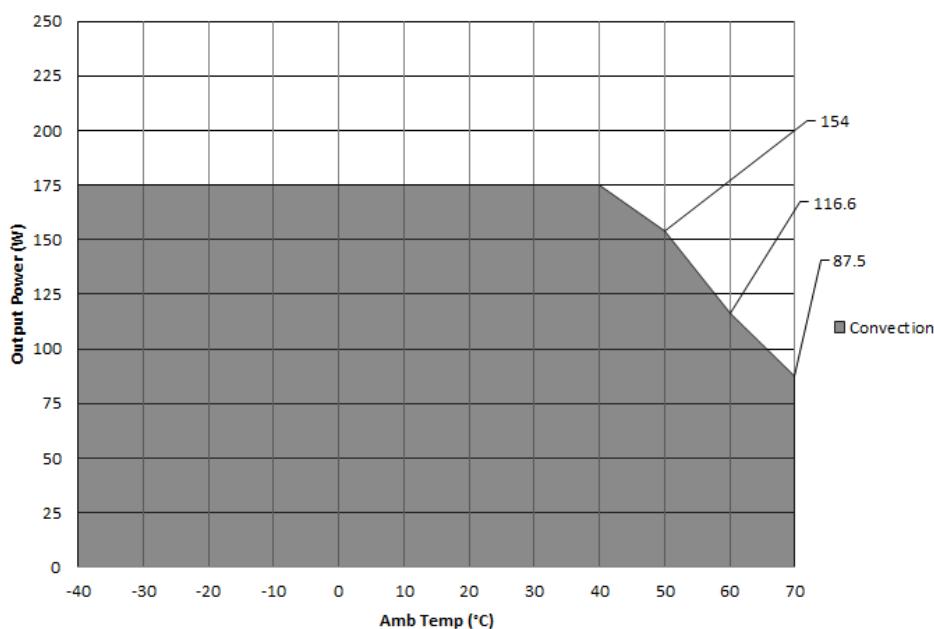

Convection load: 175W up to 40 °C. De-rate Between 40°C -50°C @ 1.2 % per °C above 50 °C @ 1.67 % per °C

Mechanical Drawing

Screw terminal (1XXX/ 2XXX)

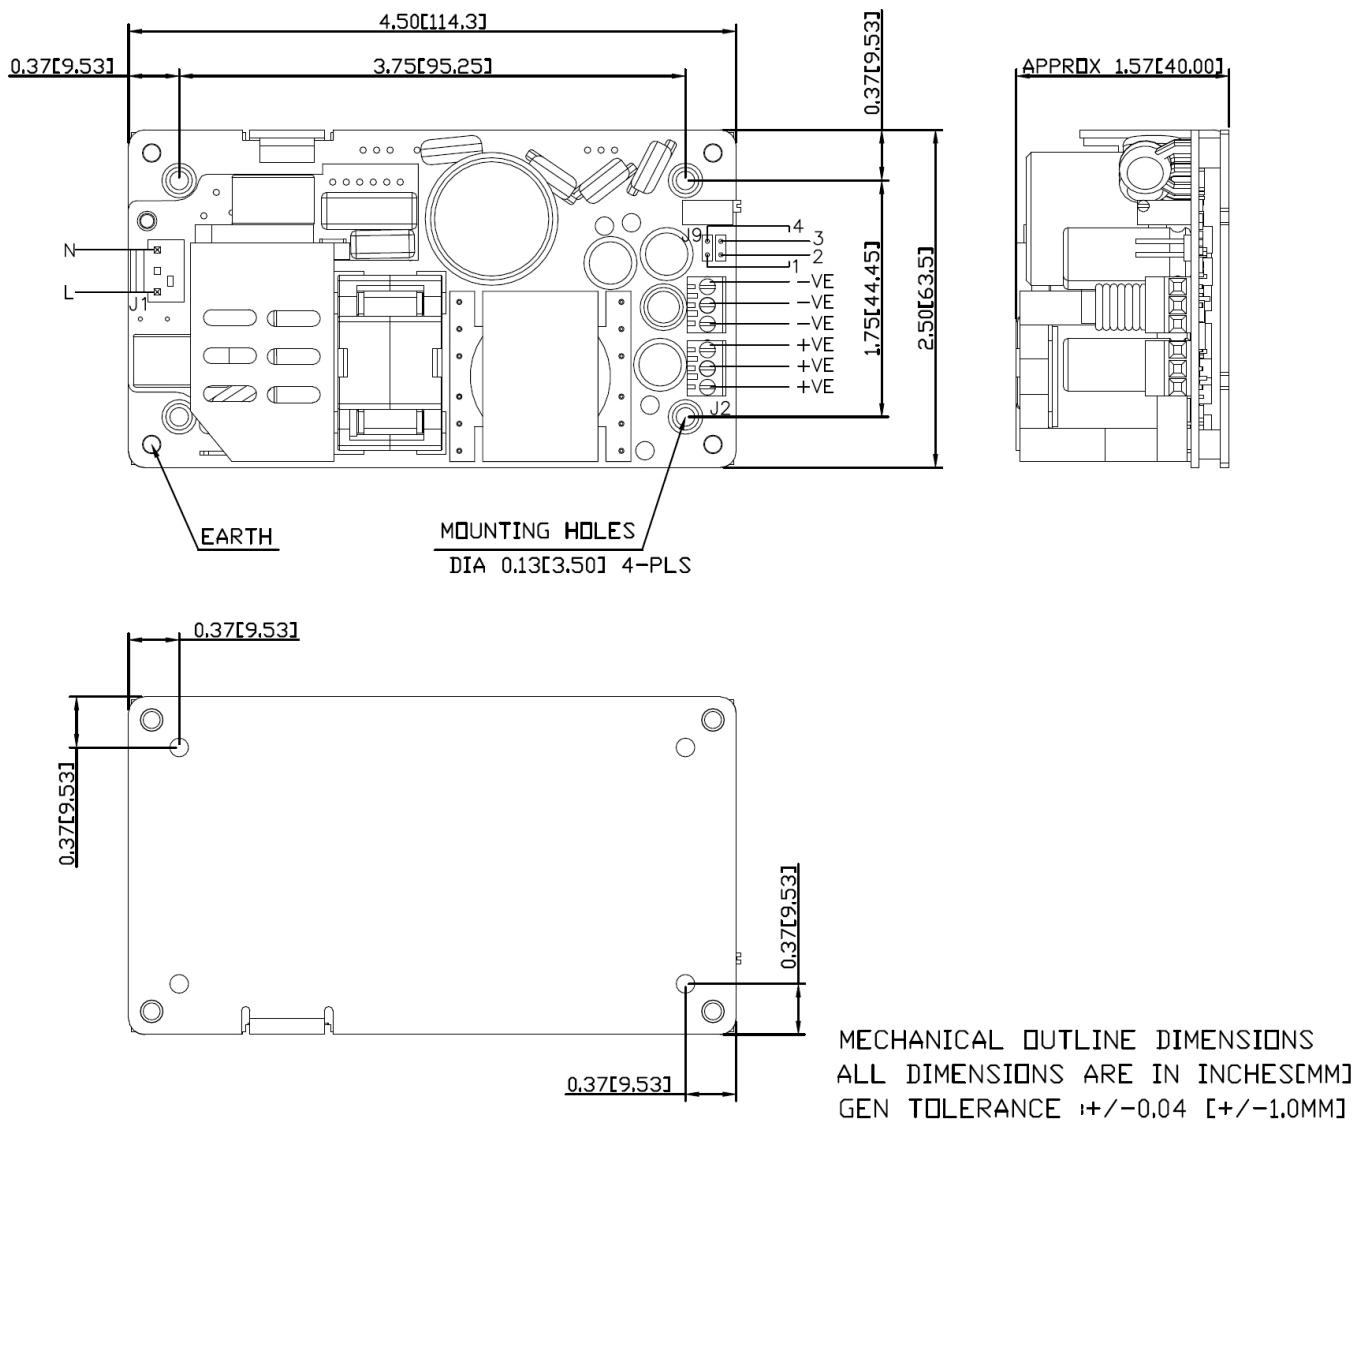


Mechanical Drawing

Header terminal (1XXX/ 2XXX)


NOTE:-

PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.

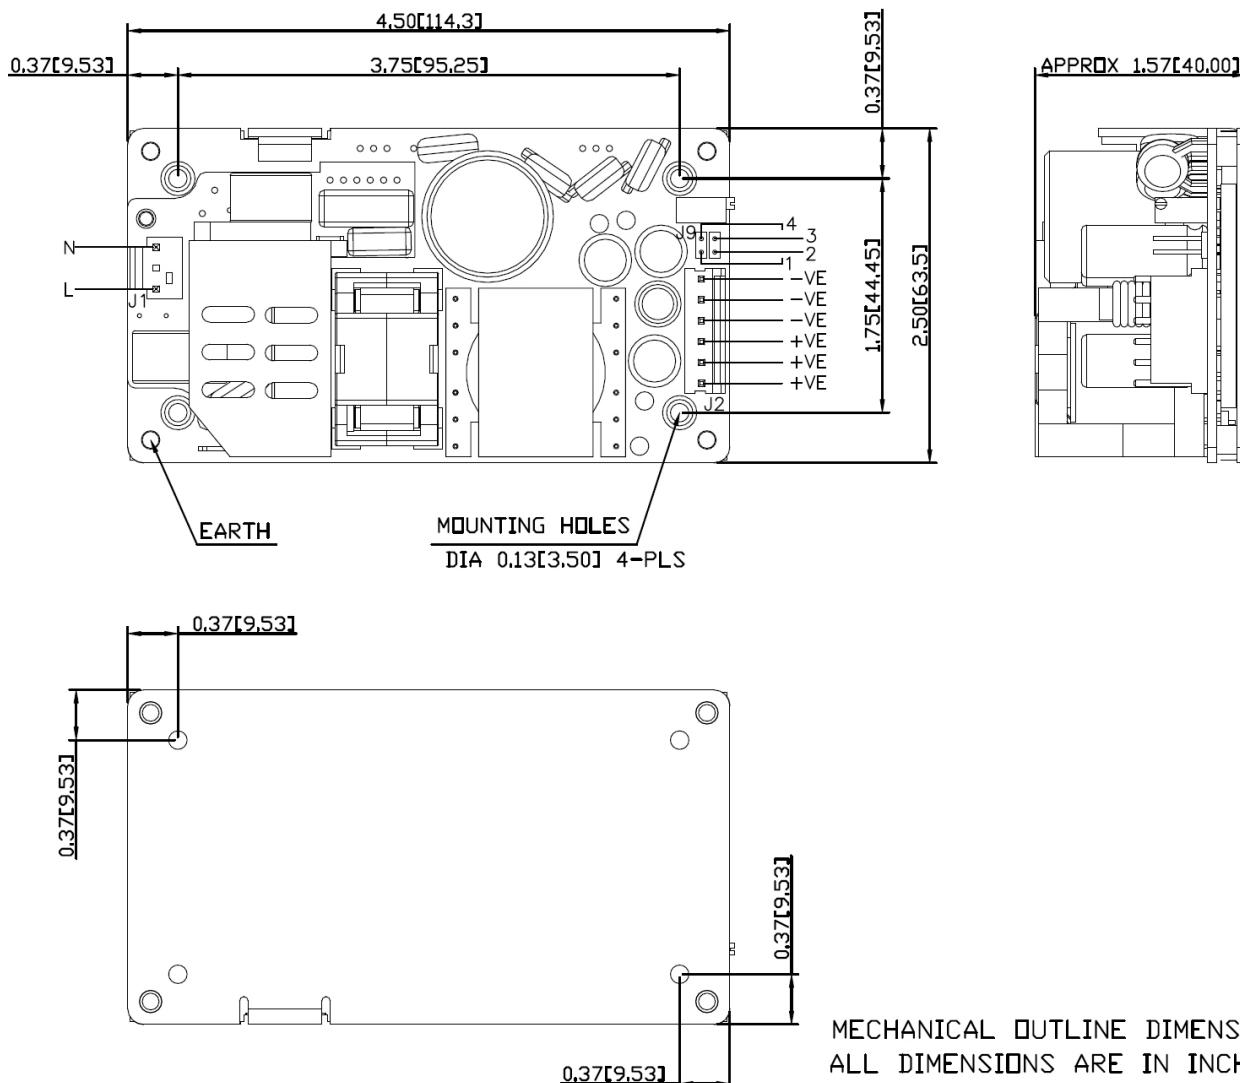

Mechanical Drawing

Screw terminal (1XXX-B/ 2XXX-B)

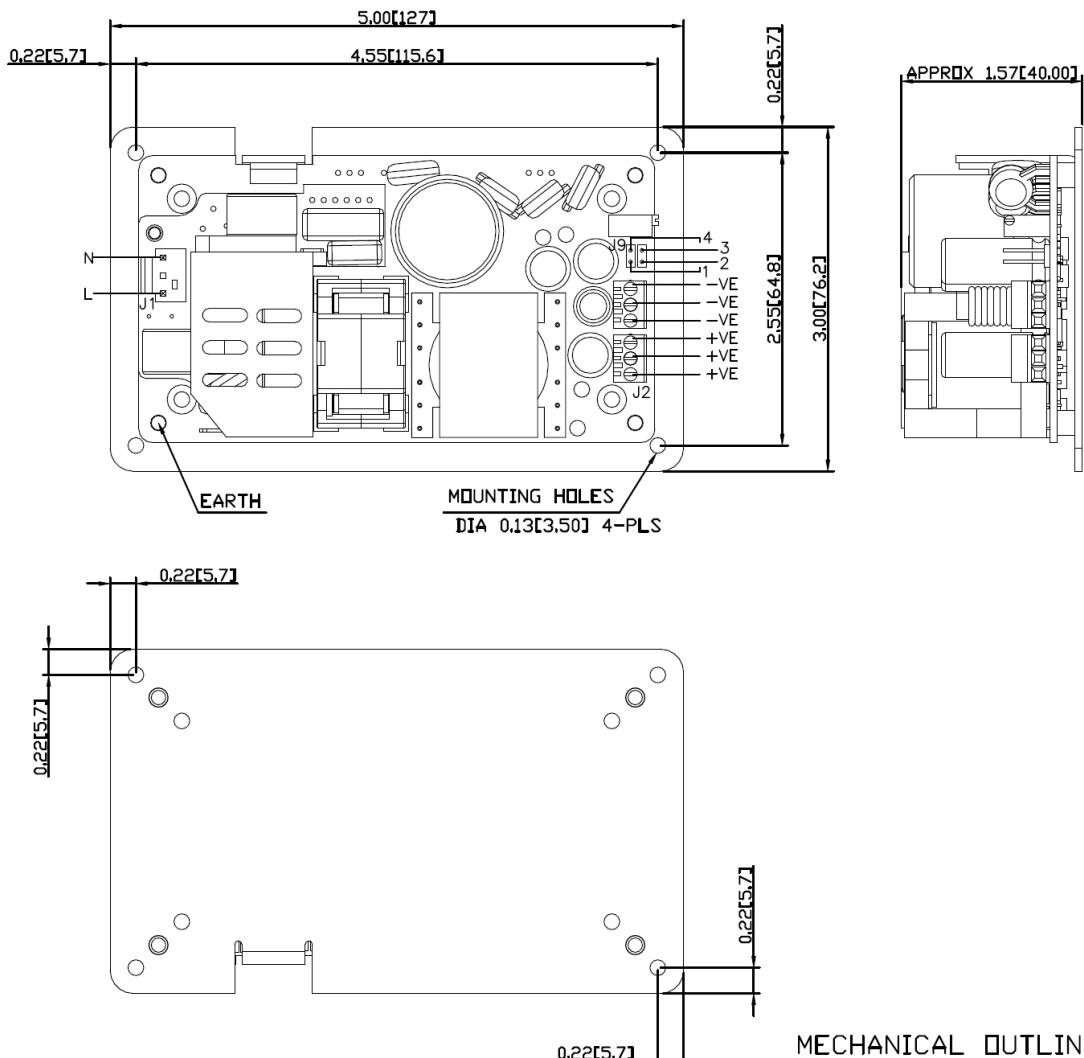


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES[MM]
GEN TOLERANCE $+\!-\!0.04$ [$+\!-\!1.0\text{MM}$]

Mechanical Drawing

Header terminal (1XXX-B/ 2XXX-B)

NOTE:-


PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC FOR CONNECTOR DETAILS ON PAGE NO.13.

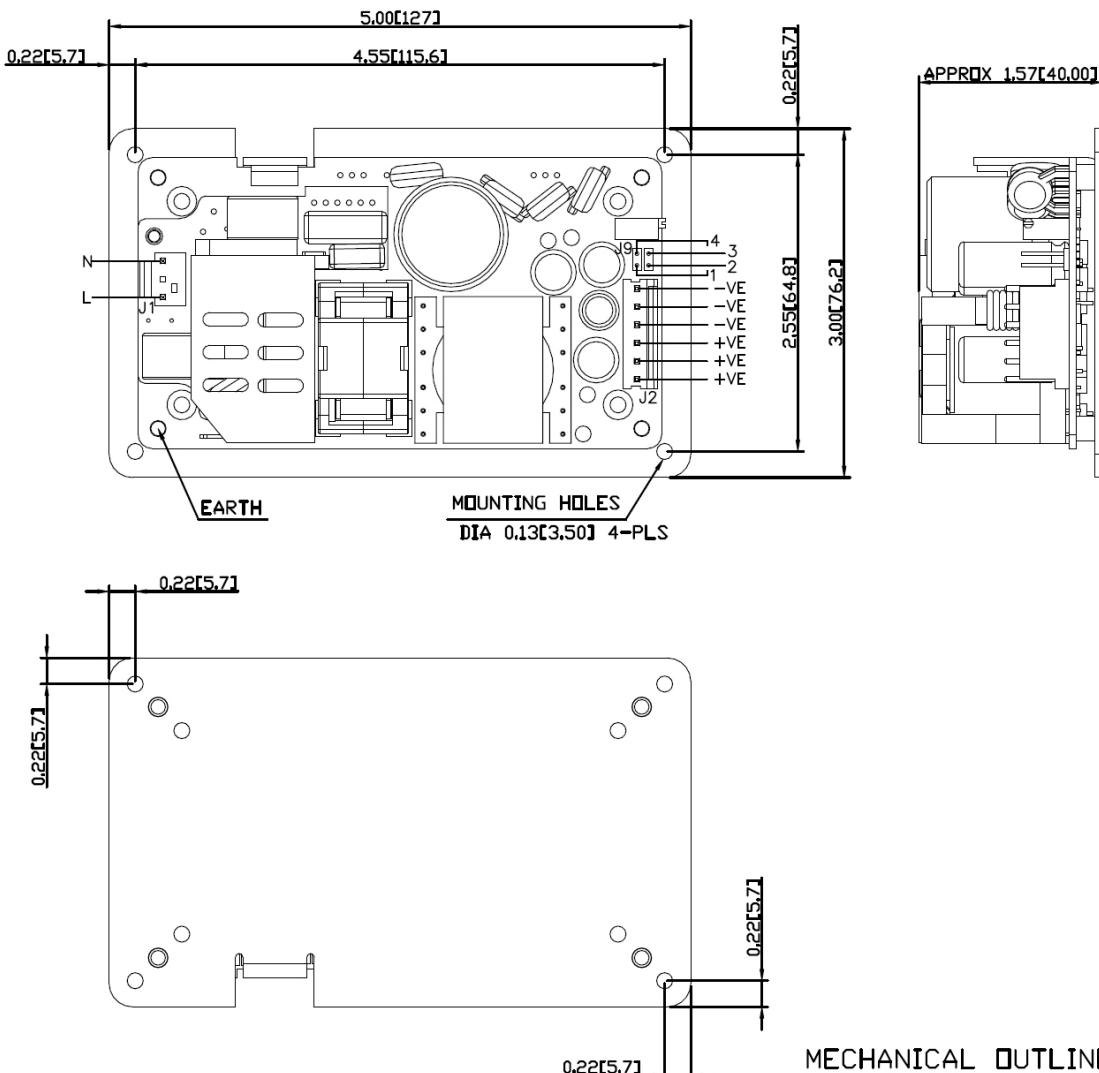

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES [MM]
GEN TOLERANCE ± 0.04 [± 1.0 MM]

Mechanical Drawing

MFLS250 2.5 X 4.5 with L-Bracket

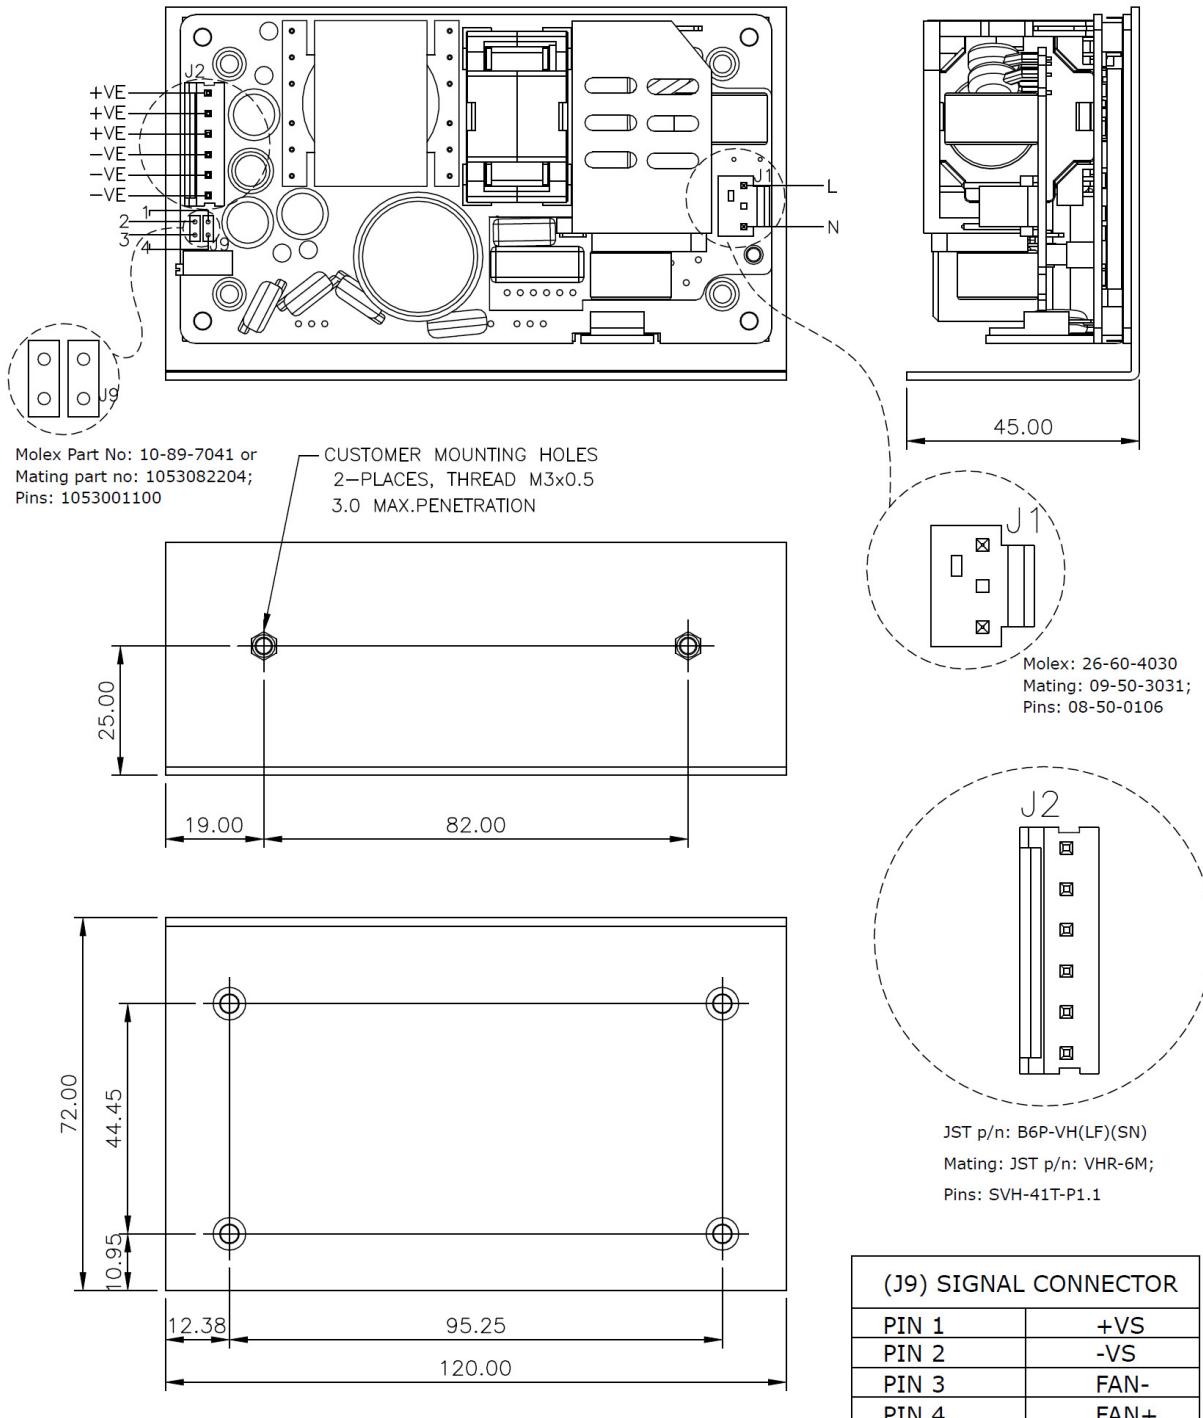


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE: +/-0.5 MM

Mechanical Drawing

MFLS250 3 X 5 with L -Bracket

NOTE:-





PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.

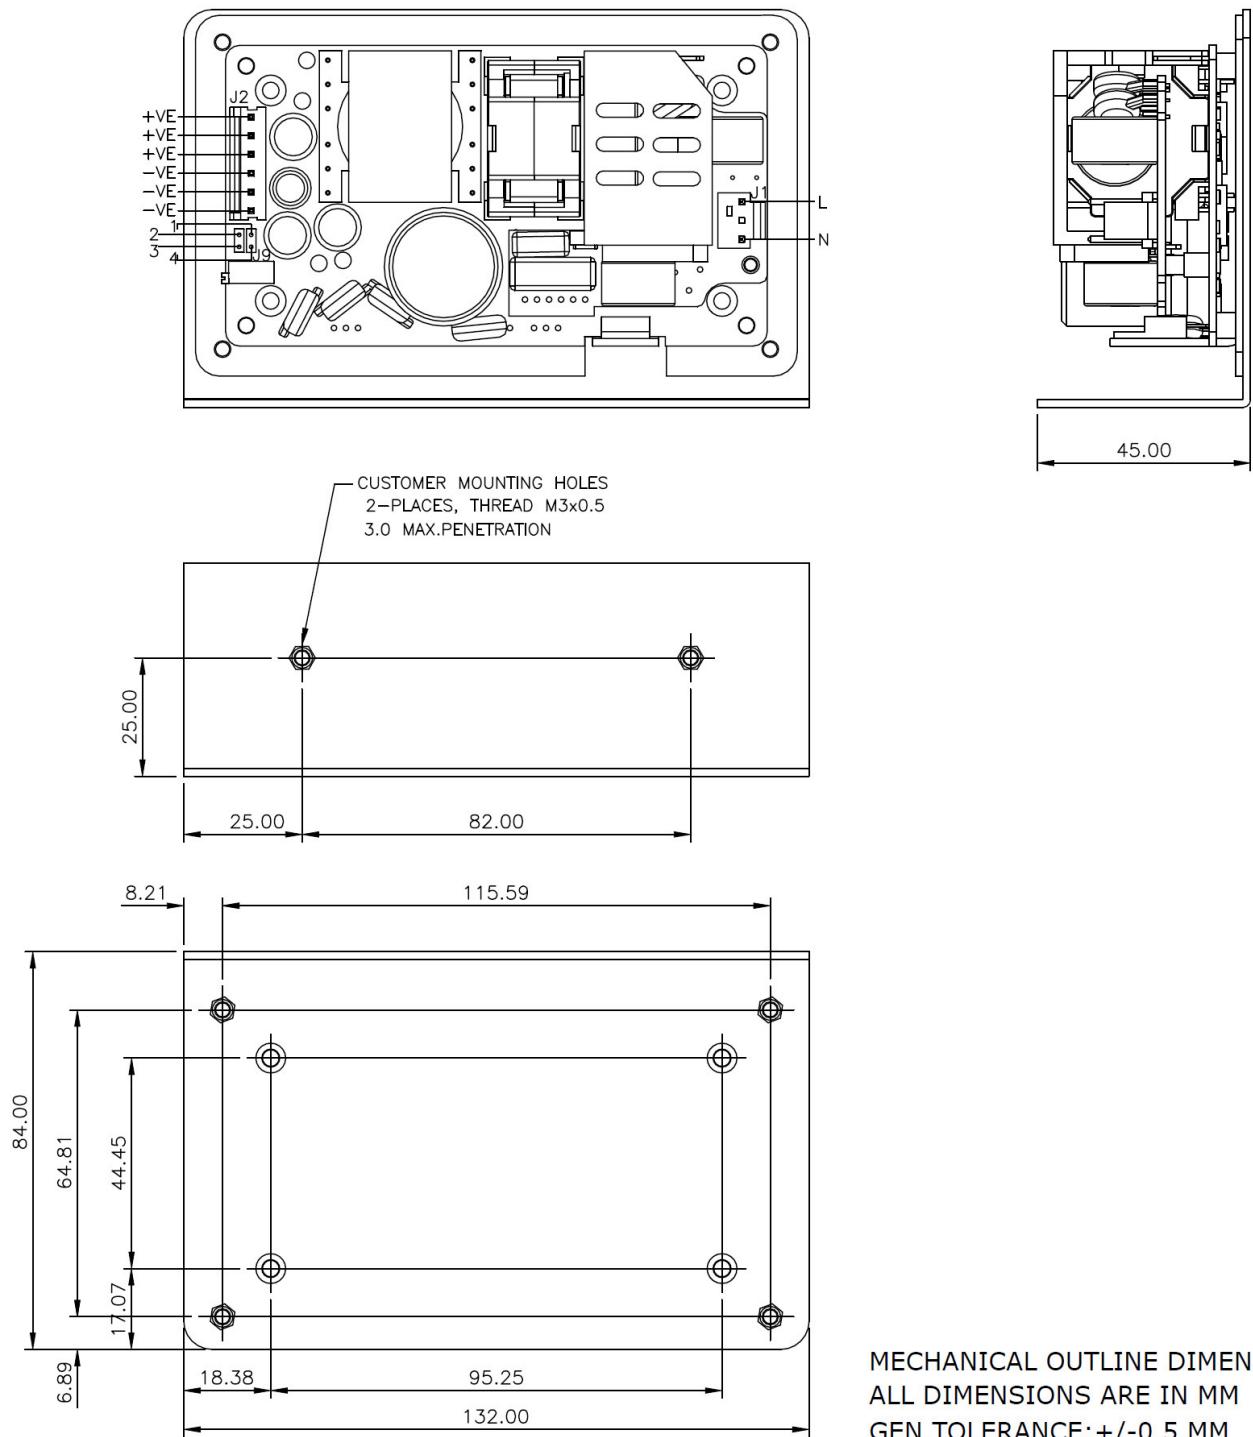

Mechanical Drawing

MFLS250 2.5 X 4.5 with U Channel

NOTE:-
PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.

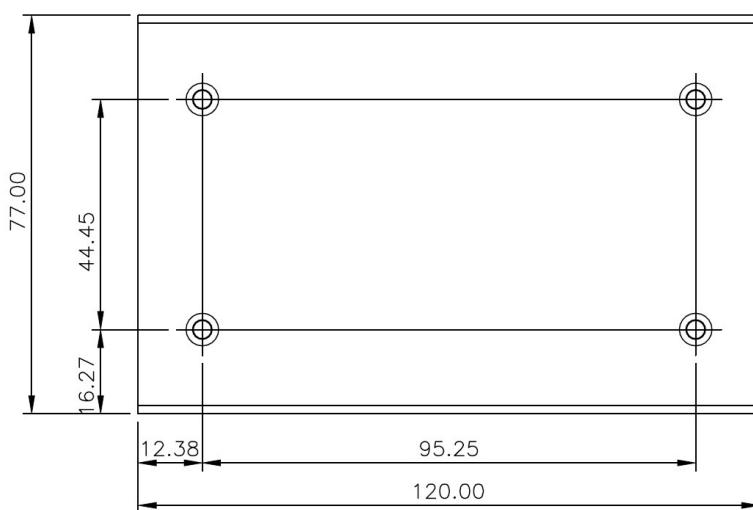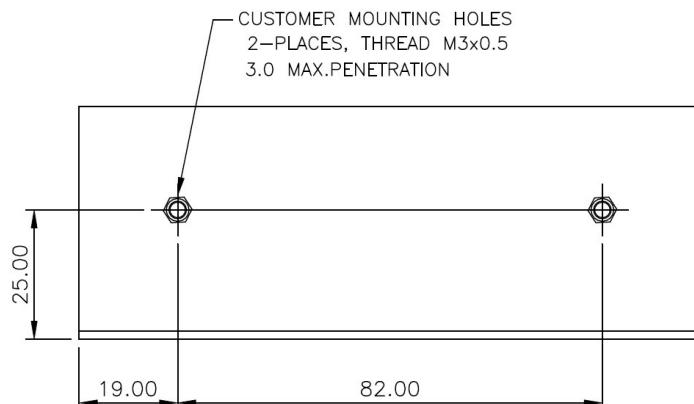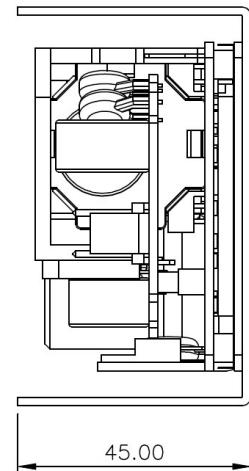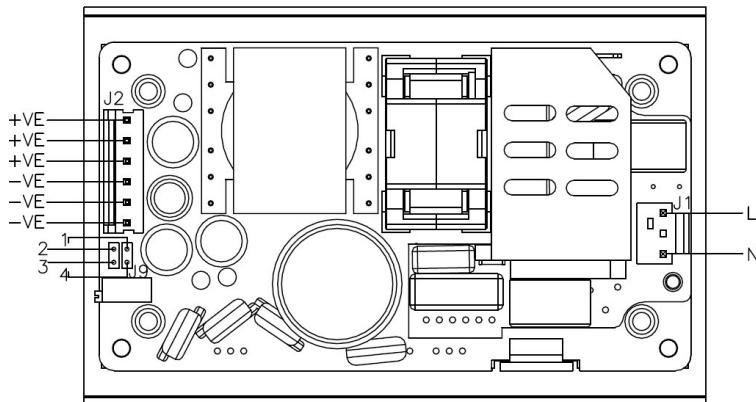


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE: +/-0.5 MM

Mechanical Drawing

MFLS250 3 X 5 with U Channel

NOTE:-

PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.



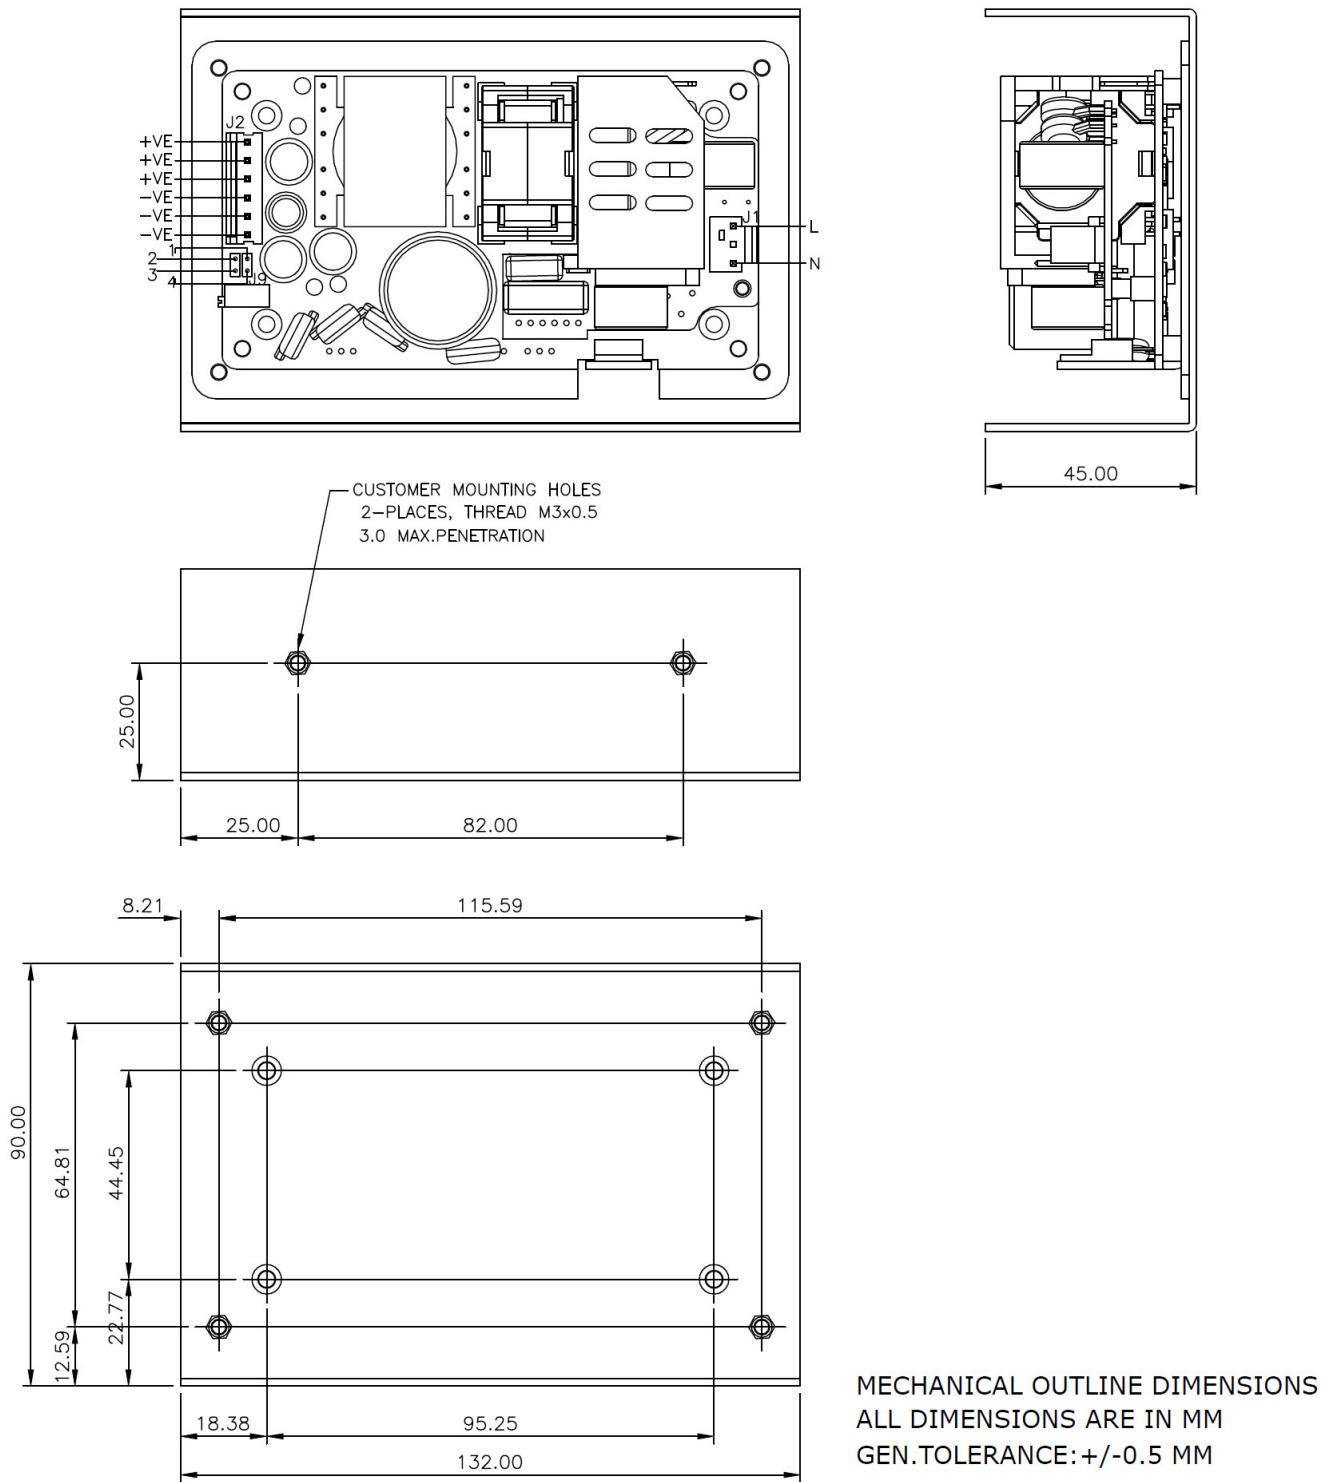


Mechanical Drawing

MFLS250 2.5 X 4.5 with Cover kit

NOTE:-

PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.

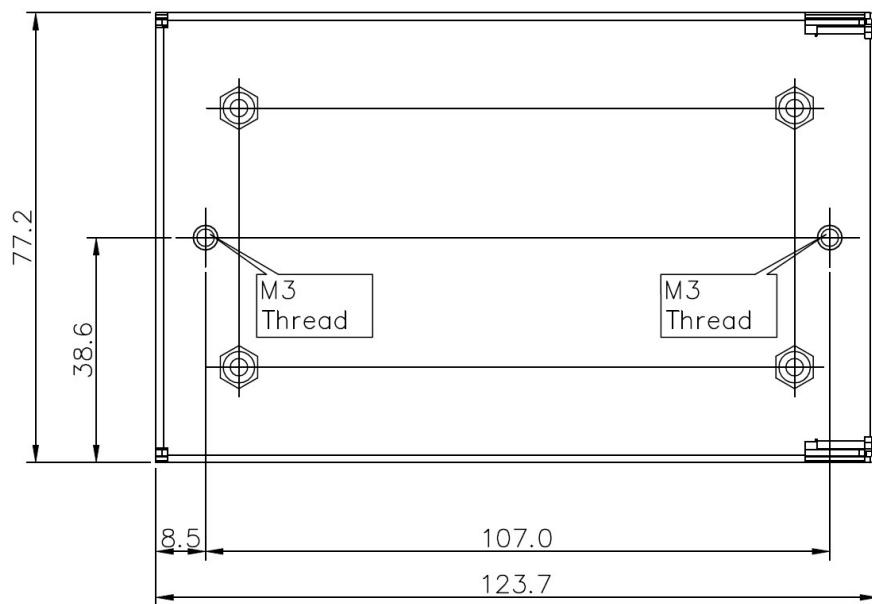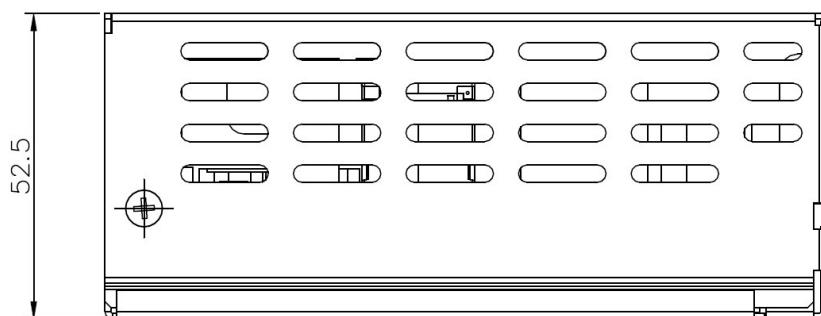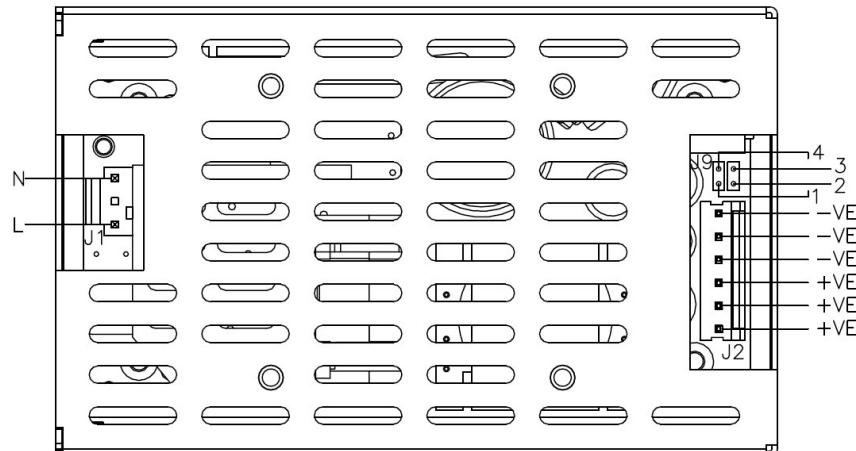


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE: +/- 0.5 MM

Mechanical Drawing

MFLS250 3 X 5 with Cover Kit

NOTE:-

PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.



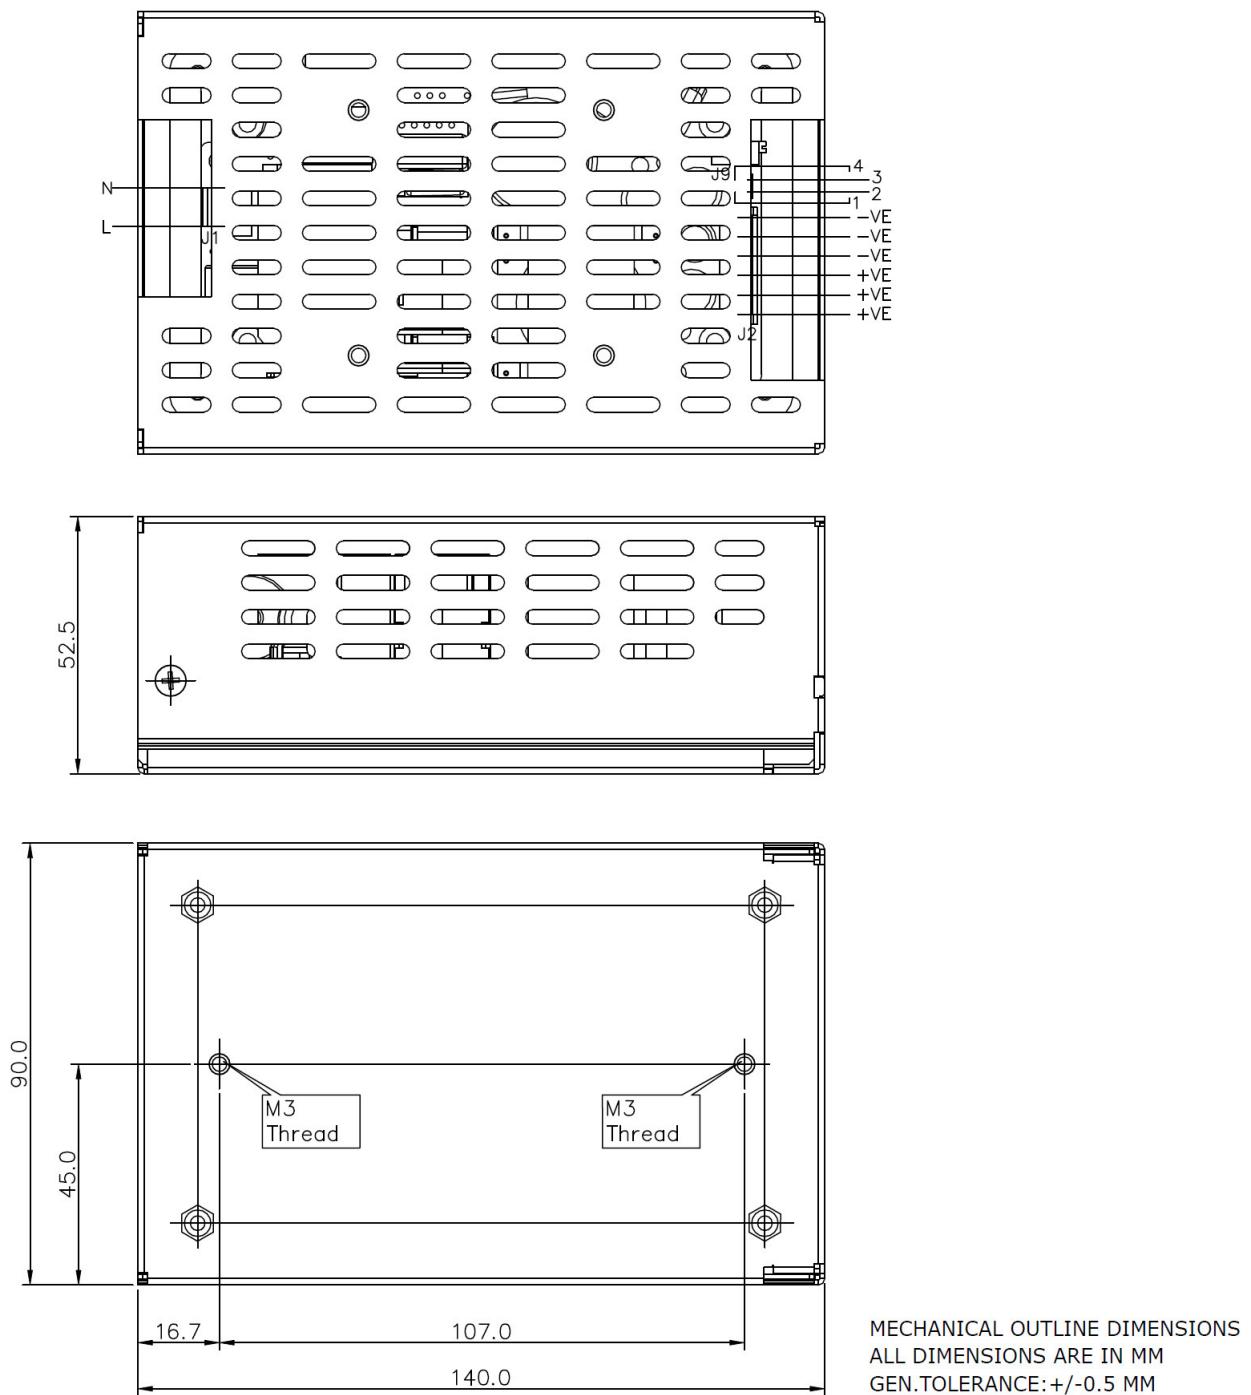


Mechanical Drawing

MFLS250 2.5 X 4.5 with Cover kit - Fan

NOTE:-

PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.

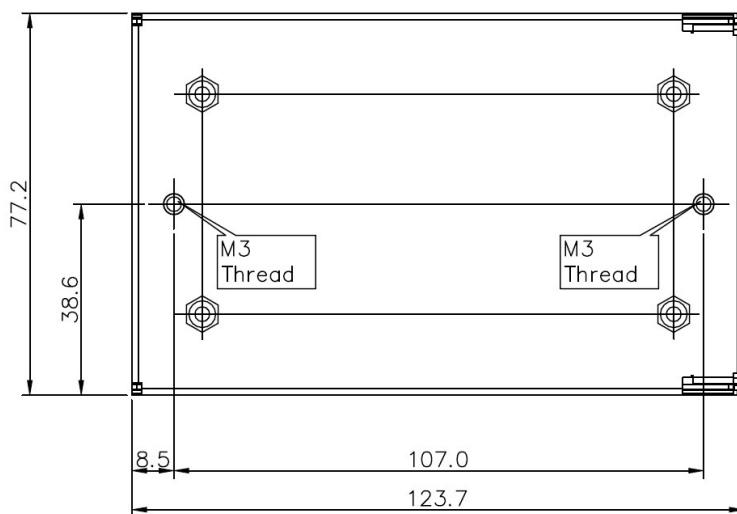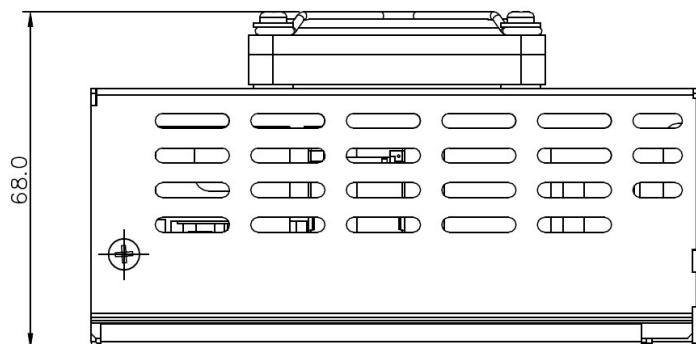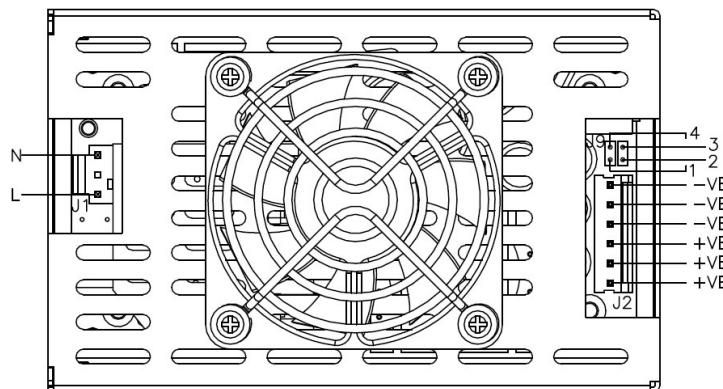




MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE: +/-0.5 MM

Mechanical Drawing

MFLS250 3 X 5 with Cover kit - Fan

NOTE:-






PLEASE REFER "FLS250 2.5X4.5 WITH 'L' CHANNEL" SPEC
FOR CONNECTOR DETAILS ON PAGE NO.13.

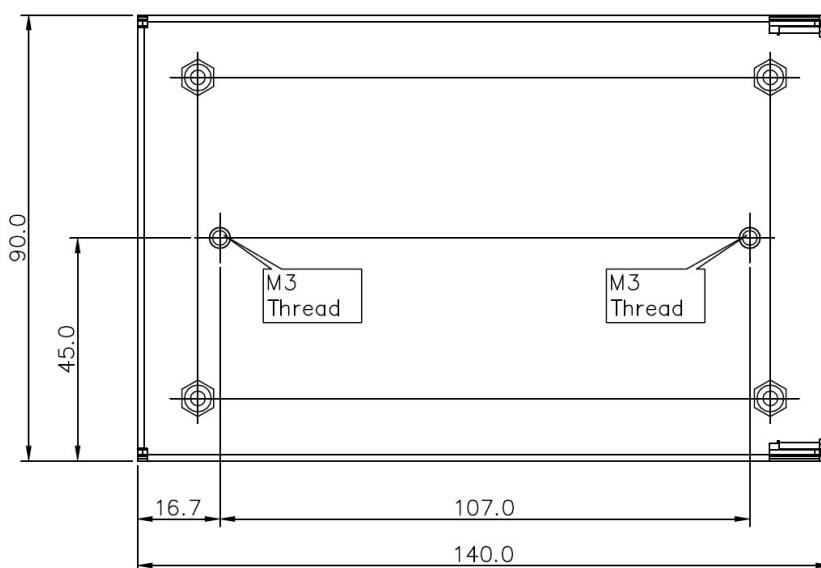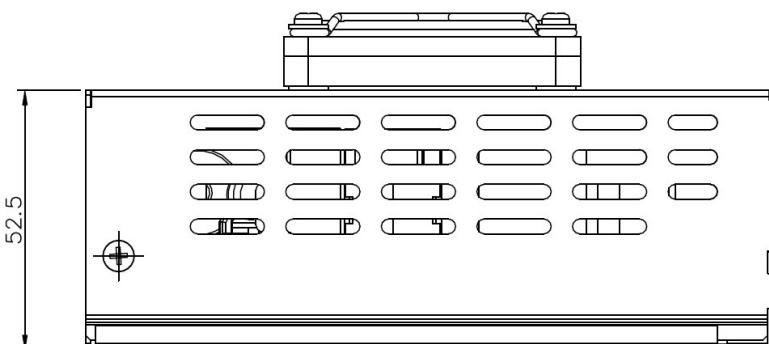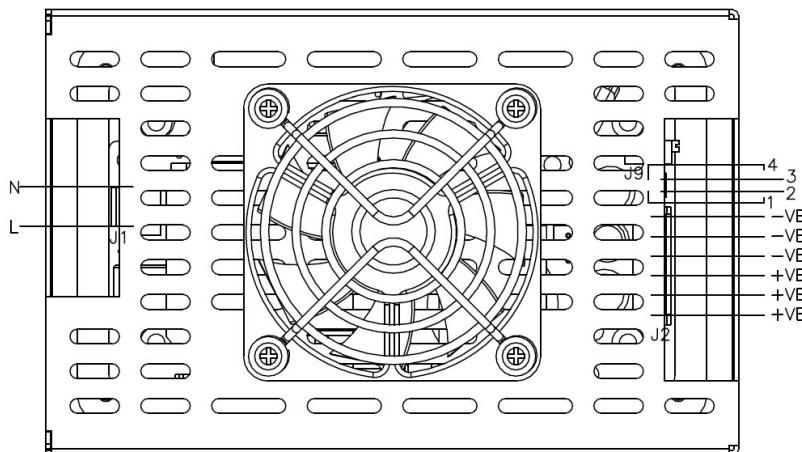


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE: +/-0.5 MM

Mechanical Drawing

COVER KIT WITH SIDE FAN

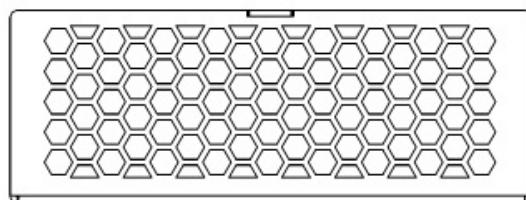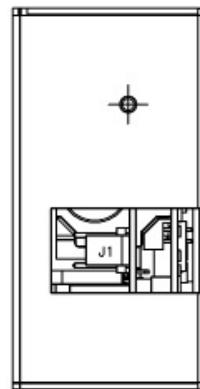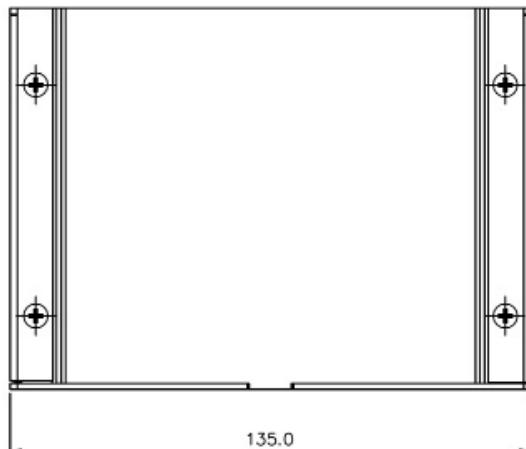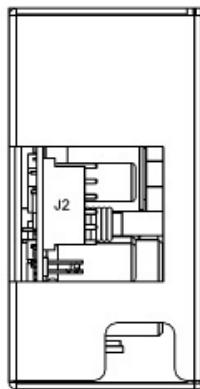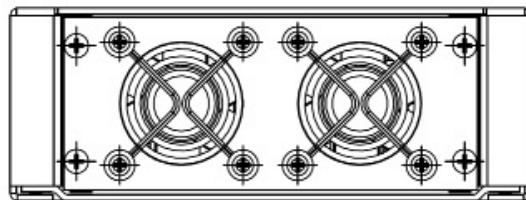

CUSTOMER MOUNTING HOLES
2-PLACES, THREAD M3x0.5
3.0 MAX.PENETRATION

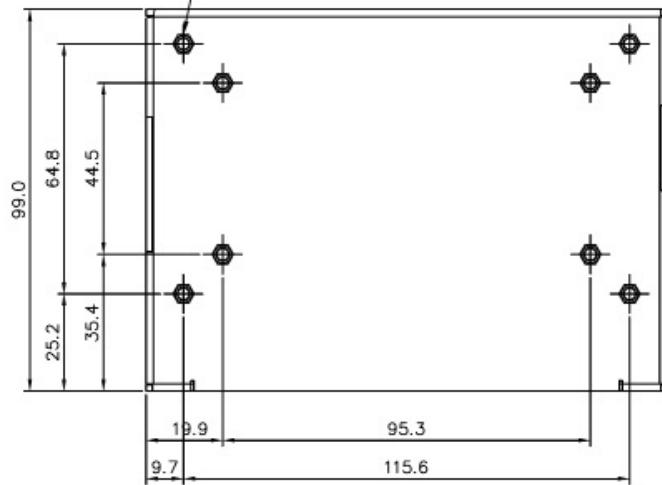

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE: +/-0.5 MM

STANDARD DC CABLE / CONNECTOR, AC CORD

AC CORD

EOS P/N	Description
CEL-22-LF00000005981	CORD, AC, US PLUG, C7, 2PIN, 2METER
CEL-22-LF00000007286	CORD, AC, US PLUG, C13, 3PIN, 2METER
CEL-22-LF00000007287	CORD, AC, EURO PLUG, C13, 3PIN, 2METER
CEL-22-LF00000007288	CORD, AC, EURO PLUG, C7, 2PIN, 2METER
CEL-22-LF00000007289	CORD, AC, UK PLUG, C7, 2PIN, 2METER
CEL-22-LF00000007290	CORD, AC, UK PLUG, C13, 3PIN, 2METER

Ordering guidelines

To order a cable and connector , substitute the appropriate Suffix below.

Example : The eZVC65SG15D has connector ID of 2.1mm. To receive ID of 2.54mm connector, order eZVC65SG15E.

Note:

All cables are 18GA & black color.

For minimum order & ship quantity consult your sales representative.

Mechanical Abbreviations

ID: Inside diameter of the DC barrel connector

OD: Outside diameter of the DC barrel or Hirose connector

LB: Length of the barrel connector

L2: Length between ferrite filter and DC connector

N/A: Not applicable

Standard DC Cable / Connector

EOS P/N :	Suffix	Description	ID (mm)	OD (mm)	LB (mm)	L2 (mm)	CordLength (length)
CEL-22-LF00000003311	A	2.54mm Straight Barrel	2.54	5.54	9.6	N/A	24*
CEL-22-LF00000003411	AR	2.54mm Right Angle with ferrite filter	2.54	5.54	9.6	25.4	40*
CEL-22-LF00000006739	AD	2.54mm Straight Barrel	2.54	5.54	10.16	N/A	52*
CEL-22-LF00000005949	BD	2.54mm Straight Barrel with ferrite filter	2.54	5.54	10.16	25.4	40*
CEL-22-LF00000003405	D	2.1mm Straight Barrel	2.1	5.54	9.6	N/A	40*
CEL-22-LF00000003249	GN	2.1mm Right Angle	2.1	5.54	9.6	N/A	6*
CEL-22-LF00000007565	BE	2.1mm Straight Barrel with ferrite filter	2.1	5.54	10.16	25.4	40*
CEL-22-LF00000007412	Z2	2.54mm Straight Barrel with ferrite filter	2.54	5.54	10.16	40	76*
CEL-22-LF00000007424	E1	2.1mm Right Angle	2.1	5.54	12.3	N/A	40*
CEL-22-LF00000007570	Z3	2.1mm Straight Barrel	2.1	5.54	10.16	N/A	40*