

DESCRIPTION: 975T D-SUB BACKSHELL - 3 WAY

MATERIAL:

PLASTIC: UL94HB, ABS PLASTIC

METALIZED: NICKEL OVER COPPER

4-40 JACKSCREWS: STEEL, ZINC PLATED

HOUSING SCREWS: STEEL, ZINC PLATED



STRAIN RELIEF: STEEL, ZINC PLATED

STRAIN RELIEF SCREWS: STEEL, ZINC PLATED

OPERATING TEMP: -55°C TO +120°C

BACKSHELL KIT INCLUDES:

- (2) BACKSHELL HAVLES
- (2) 4-40 JACKSCREWS
- (2) HOUSING SCREWS (self-tapping)
- (2) STRAIN RELIEF CLAMP
- (4) STRAIN RELIEF SCREWS (self-tapping)
- (2) CABLE SLOT SHUT-OFFS

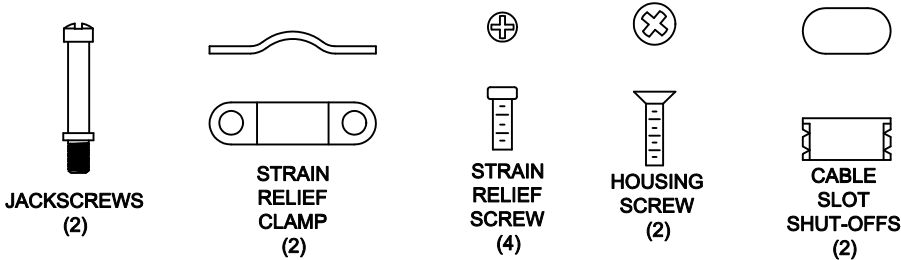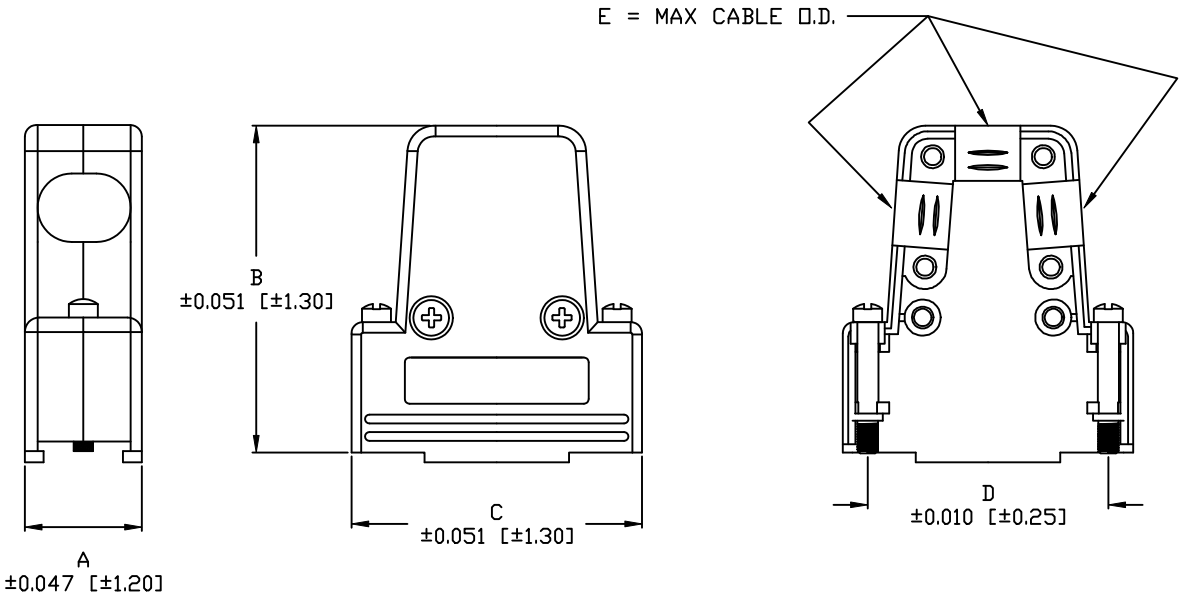

975TYYY-YYYRYY1

SERIES \_\_\_\_\_

POSITIONS \_\_\_\_\_

009

015

025

037

MATERIAL \_\_\_\_\_

010 = PLASTIC

020 = METALIZED

COLOR: \_\_\_\_\_

01 = BLACK

12 = NICKEL OVER COPPER

PUT-UPS \_\_\_\_\_

1 = KIT

| POS. | A     | B     | C     | D     | E     |
|------|-------|-------|-------|-------|-------|
| 9    | 0.591 | 1.630 | 1.221 | 0.984 | 0.230 |
|      | 15.00 | 41.40 | 31.00 | 24.99 | 5.85  |
| 15   | 0.591 | 1.780 | 1.587 | 1.312 | 0.340 |
|      | 15.00 | 45.20 | 40.3  | 33.32 | 8.63  |
| 25   | 0.591 | 1.780 | 2.106 | 1.852 | 0.400 |
|      | 15.00 | 45.20 | 53.50 | 47.04 | 10.16 |
| 37   | 0.591 | 1.780 | 2.756 | 2.500 | 0.400 |
|      | 15.00 | 45.20 | 70.00 | 63.50 | 10.16 |

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

03-17-11

CHECKED:

DATE:

SCALE:

1 : 1

SHEET

OF

1

1

REV

2

DWG NO.

975TYYY-YYYRYY1

RoHS COMPLIANT

NorComp