


Material and Finish

- (1) Gasket: Silicone, Red Color
UL 94HB Rated
- (2) Body: Polycarbonate, UL 94V-0 Rated,
Black Color
- (3) Seal: Silicone, Blue Color, UL 94HB Rated,
For Cable O.D. 7 - 9.5mm
- (4) Seal Nut: Polycarbonate,
UL 94V-0 Rated, Black Color

IP Degree of Protection: IP67 when
mated with GM67X-CBL-xxx-P
or GM67X-S-88

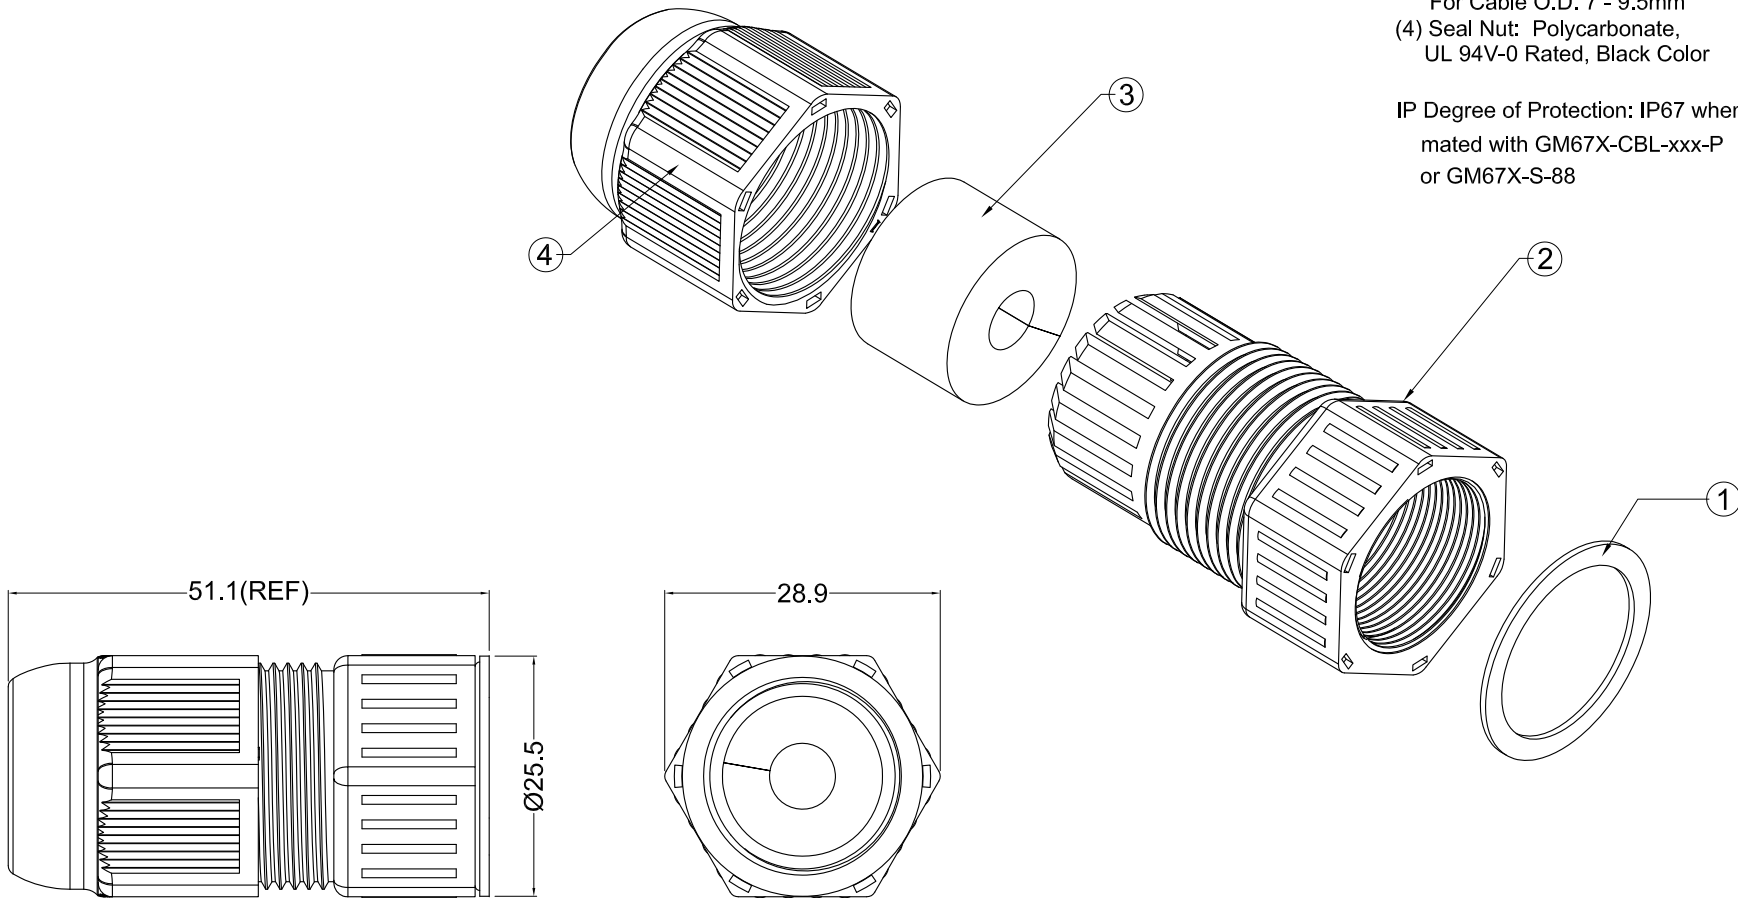

Recommended Cable O.D.: 7 - 9.5 mm
*To be used when assembling category 5 cable

RoHS COMPLIANT

Tolerances
X.X ± 0.38
X.XX ± 0.25
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE	GM67X-CS-B	IP67 Modular Jack	
A0	8/23/11	New Drawing	P. DalCanto	H. MA	P. DalCanto	5/5/11		Cable Side, Blue Insert	
A1	8/30/11	Release Drawing	P. DalCanto	N/A					
A2	12/10/12	ECO #12-062	S. Vien	P. DalCanto					
A3	08/27/13	ECO #13-021	W. Cook	P. DalCanto					
A4	09/11/15	Remove CSA	H. MA	W. Cook		UNITS			
						mm			