



THIS DOCUMENT IS THE PROPERTY OF  
KEYSTONE ELECTRONICS CORP., AND  
SHALL NOT BE REPRODUCED, DISTRIBUTED  
OR USED AS A BASIS FOR MANUFACTURE  
WITHOUT PRIOR WRITTEN PERMISSION  
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE

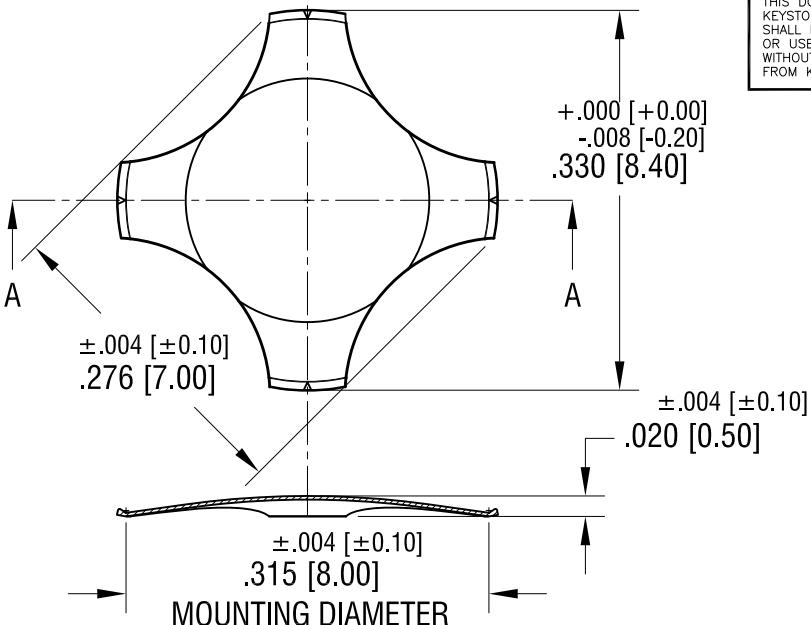

SECTION A-A

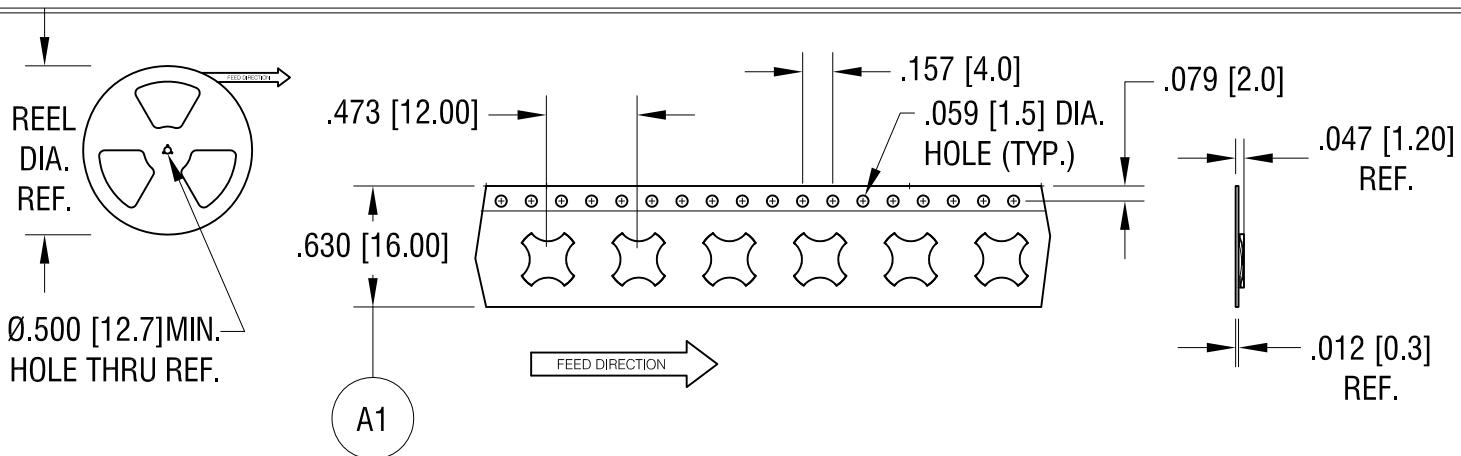

DOME SPECIFICATIONS:

1. VOLTAGE/CURRENT MAXIMUM: 12mA@ 24 Volts DC
2. OPERATING TEMPERATURE: -40°C TO 105°C
3. STORAGE TEMPERATURE: -55°C TO 125°C
4. MATL: .003 [0.08] STAINLESS STEEL
5. FINISH: NICKEL PLATE
6. TRIP FORCE: 280g

NOTES: SUPPLIED ON TAPE AND REEL ONLY

TAPE AND REEL SPECIFICATIONS:

1. TAPE:  
MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER  
ANSI/EIA-481 STANDARD
2. REEL:  
13.0 [330.2] DIA. 5000 PIECES PER REEL

**KEYSTONE ELECTRONICS CORP.**

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

MINI 4 LEG DOME

MATERIAL

AS NOTED

FINISH	AS NOTED		DRN BY	DATE
			NT	2.15.17
			APP'D	RH
			SCALE	6X, 1X
			CODE	DWG NO.
			C	5134TR

6.22.20 | (A1) WAS .945 [24.00]  
CHANGE AS PER ECN 20-059 | A

DATE	DESCRIPTION	REV.	