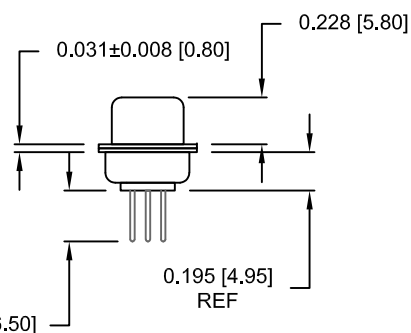
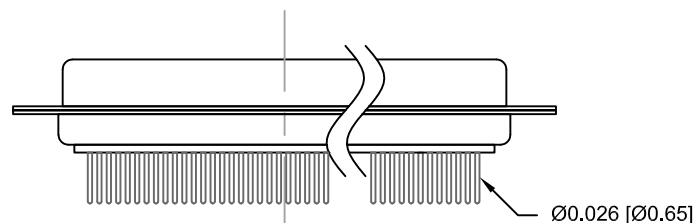
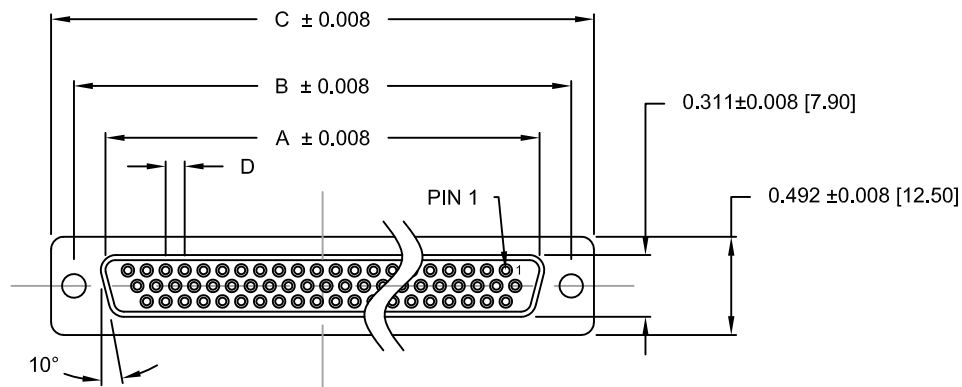


**MATERIALS AND FINISH:**

SHELL: STEEL MATERIAL, NICKEL FINISH
 INSULATOR: PA9T = 260°C, UL 94V-0 RATED, BLACK
 CONTACT MATERIAL: BRASS
 CONTACT FINISH: SEE PLATING PART NUMBER KEY BELOW
 SEAL MATERIAL: F04 FLEXIBLE ADHESIVE

ELECTRICAL:

CONTACT CURRENT RATING: 5 AMPS
 CONTACT RESISTANCE: 10 mOHMS Max.
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC Min.
 INSULATION RESISTANCE: 5 GOHMS Min.
 TEMPERATURE RATING: -55° ~ +125° C

DIMENSIONS (in.)					
No. OF PINS	A	B	C	D	Insulator Material
15	0.642	0.984	1.213	0.090	PA9T
26	0.969	1.311	1.543	0.090	PA9T
44	1.512	1.852	2.089	0.090	PA9T

DIMENSIONS (mm)					
No. OF PINS	A	B	C	D	Insulator Material
15	16.30	25.00	30.80	2.29	PA9T
26	24.60	33.30	39.20	2.29	PA9T
44	38.40	47.05	53.05	2.29	PA9T

MEETS IP67 STANDARDS

(SEE PAGE 3 FOR SEALING DETAILS)

780-M YY-2 1 3 R YY 1

SERIES
 MACHINED CONTACTS
 POSITION
 15
 26
 44
 GENDER
 2 = FEMALE
 TERMINATION
 1 = VERTICAL DIP
 SHELL PLATING
 3 = NICKEL
 HIGH TEMP INSULATOR (260°C)
 HARDWARE OPTIONS
 00 = NO HARDWARE, Ø.120" HOLE
 01 = .065" CLINCH NUT (BOARD SIDE)
 05 = .237" 4-40 BOARD LOCK (BOARD SIDE)
 CONTACT PLATING
 1 = GOLD FLASH, ENTIRE CONTACT
 2 = 30 MICRO INCH GOLD
 3 = 50 MICRO INCH GOLD

RoHS COMPLIANTUNITS = INCHES [MM] **DO NOT SCALE FROM DRAWING**

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

08/08/2018

NorComp

SCALE:

NTS

SHEET

1

OF




4

REV

10

DWG NO.

780-MYY-213RYY1

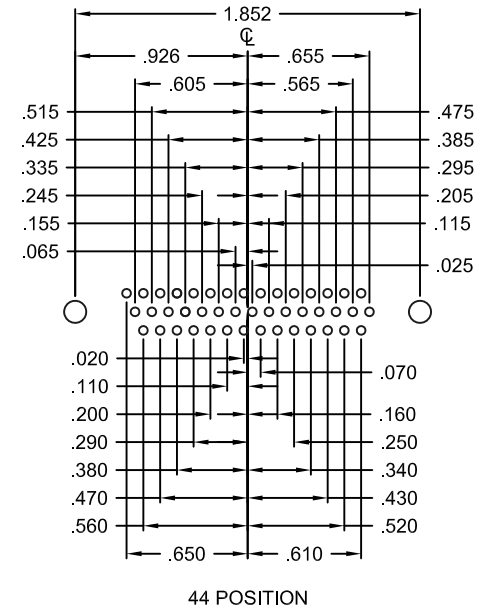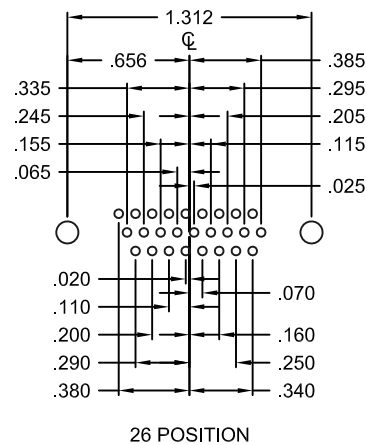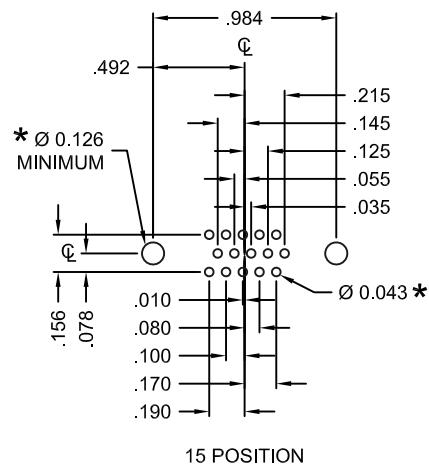

HOLE PATTERN SHOWN
ARE FOR FEMALE

UNITS = inch

* TYP.
SUGGESTED SIZE
MAY NOT BE SUITABLE FOR ALL APPLICATIONS

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
J. KADEL
DATE:
08/08/2018



NorComp

SCALE:
NTS
DWG NO.

SHEET 2 OF 4

REV 10

780-MYY-213RYY1

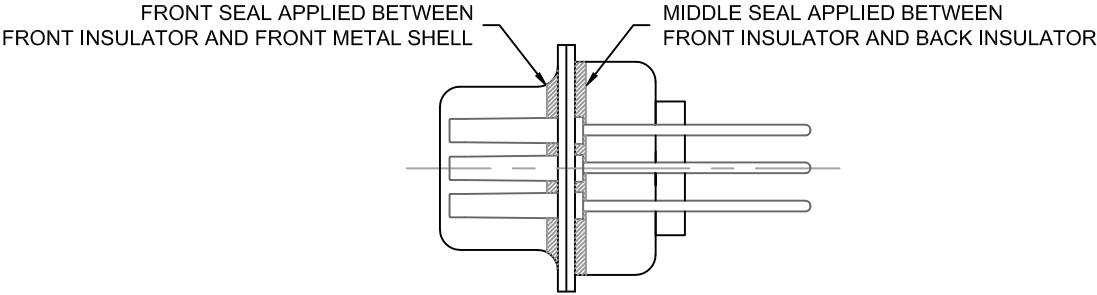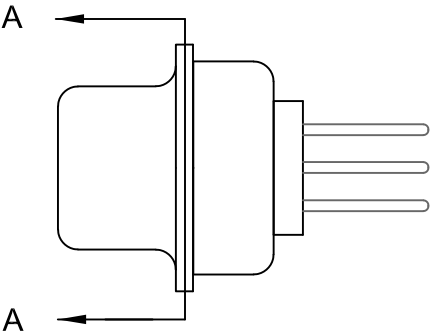

DETAIL A-A


RoHS COMPLIANT

DO NOT SCALE FROM DRAWING


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: J. KADEL		SCALE: NTS	SHEET 3	OF 4	REV 10
		DATE: 08/08/2018		DWG NO. 780-MYY-213RYY1			

ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

01X 0.065" (BOARD SIDE)

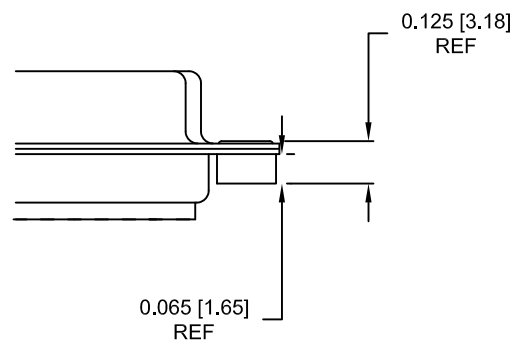

05X 0.237" (BOARD SIDE)

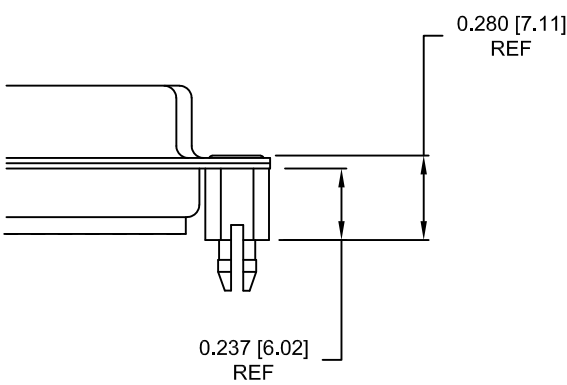

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: J. KADEL		SCALE: NTS	SHEET 4 OF 4	REV 10
		DATE: 08/08/2018		DWG NO. 780-MYY-213RYY1		