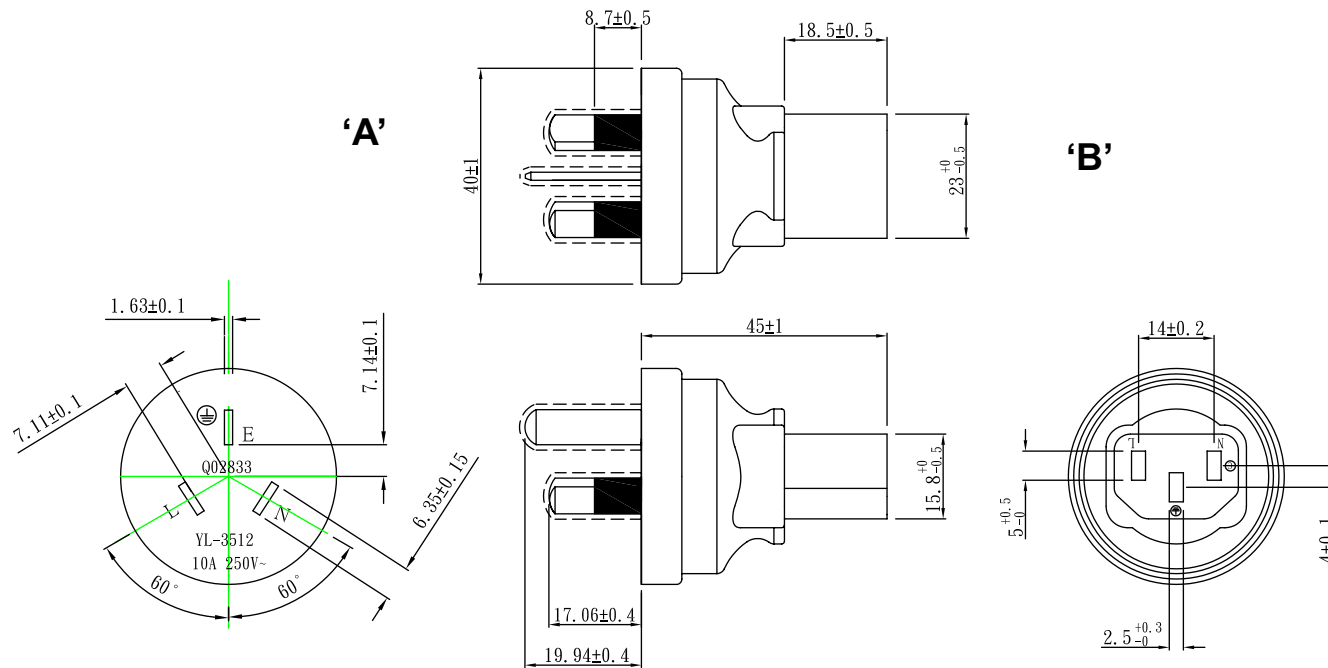


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.15807, EM	03/13/09	HM
B	UPDATE MODEL, RFS. 15895, EM	03/26/09	HM


GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC
 INSULATION RESISTANCE: 100 MΩ
 DIELECTRIC WITHSTAND VOLTAGE: 2000 V/sec.
 CONDUCTOR COLORS: BLUE/BROWN/GREEN-YELLOW
 COLOR: BLACK
 MATERIAL: PVC, 94V-0, 50P HARDNESS
 END 'A' TERMINATION: AUSTRALIAN AS/NZS 3112 PLUG
 END 'B' TERMINATION: IEC 60320/C13

PACKING:

INDIVIDUAL POLY BAG 110 x 85 x 0.04 mm

LABEL:

25 x 50 mm WHITE LABEL PLACED ON POLYBAG



Contents of this document are subject to change without prior notice	Foot Note: Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.	Limitation of Use: Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY: EM	DATE: 03/13/09	MILLIMETERS .xx +/- 0.3 .xxx +/- .013	ANGULAR +/- 1°	DWG TITLE: AUSTRALIAN AS/NZS 3112 - IEC60320/C13 PLUG ADAPTOR	
			DRAWN: NF	DATE: 03/13/09	FSCN No.: G, YL	SIZE A	MODEL: YL-3512	REV. B
			APRVD: HM	DATE: 03/13/09	SCALE: NONE		PART NO: 550-701(R)	SHEET 1/1